


TRENCH 24 EARTH

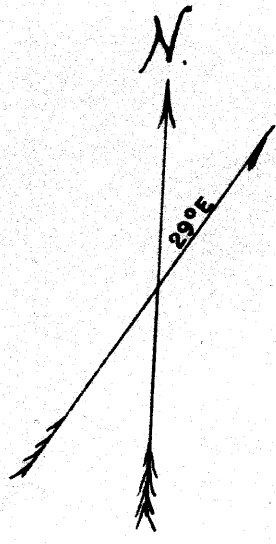

TRENCH 23 2.0' AG 12.10 PB 5.00 ZN 3.80

TRENCH 1. 2.5' AG 9.75 PB 7.70 ZN 4.00

|           |      |       |      |      |
|-----------|------|-------|------|------|
| TRENCH 2. | 3.2' | 16.00 | 4.90 | 2.00 |
|           | 1.8' | 7.40  | 3.00 | 1.30 |
| AVG.      | 5.0  | 12.70 | 4.41 | 1.75 |

TRENCH 3. 4.5' 32.15 10.00 6.00

|           |      |       |      |      |
|-----------|------|-------|------|------|
| TRENCH 4. | 4.0' | 16.45 | 1.50 | 3.70 |
|           | 1.5' | 9.95  | 6.60 | 2.50 |
| AVG.      | 5.5  | 14.68 | 2.89 | 3.37 |

TRENCH 5. 5.2' 8.95 0.90 0.40

**FLINT ZONE (NORTH)**  
 LENGTH 200', AV. WIDTH 3.38' UNCUT AG. 16.22 Oz/T. PB 4.65% ZN 3.16%  
 CUT 12.57 Oz/T. 3.38% 2.20%

# SILVER FLINT MINES LTD

ALICE ARM B.C.

PLAN SHOWING TRENCHES MADE AND VALUES OBTAINED DURING SUMMER OF 1951.

SCALE 1" = 20'

TRENCH 10. EARTH

TRENCH 11. EARTH

TRENCH 12. EARTH

TRENCH 13. EARTH

TRENCH 14. 1.6' 6.90 2.50 2.80

TRENCH 15. 1.0 42.45 10.00 4.70

TRENCH 16. ZONE 0.5'

TRENCH 17. 1.8' 36.20 13.70 1.30

TRENCH 18. 4.0' 6.60 3.90 1.30


TRENCH 19.

TRENCH 21.

TRENCH 22. EARTH

TRENCH 23. EARTH

**FLINT ZONE (SOUTH)**  
 LENGTH 112', AV. WIDTH 2.07' UNCUT AG 16.36 Oz/T. PB 6.39% ZN 1.81%  
 CUT 9.94 Oz/T. 4.39% 1.38%

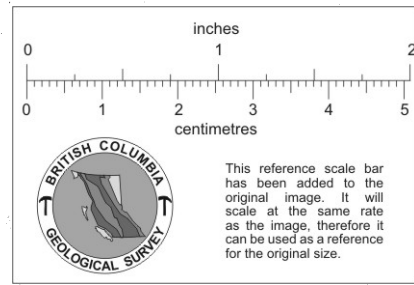

| SUMMARY OF GRADES |                 |           |                            |
|-------------------|-----------------|-----------|----------------------------|
| TOTAL LENGTH      | 412'            | AV. WIDTH | 2.66'                      |
|                   |                 |           | 110 TONS PER VERTICAL FOOT |
| UNCUT             | AG. 17.31 Oz/T. | PB 5.04%  | ZN 3.11%                   |
| CUT               | 13.74 Oz/T.     | 3.67%     | 2.22%                      |

1.0' 26.40 4.30 3.00

1.0' 33.85 5.60 9.00

TRENCH 20.

GRAB 124.0 8.3 19.9

1.0 51.10 3.50 3.30

103P/1166w  
103P-141

**COLLINS ZONE**  
 LENGTH 100', AV. WIDTH 1.0', UNCUT AG 37.90 Oz/T PB 4.62% ZN 5.79%  
 CUT 33.54 Oz/T 4.18% 4.35%