


LEGEND

CHARGEABILITY VALUES IN MILLISECONDS
 10 MILLISECOND CONTOUR INTERVAL

NOTES

SEIGEL MARK □ IP INSTRUMENTATION
 THREE ELECTRODE ARRAY

PLATE 5
 DERRY, MICHENER & BOOTH
 EBL PROJECT
 EAST BARRIER LAKE AREA, BRITISH COLUMBIA
 INDUCED POLARIZATION SURVEY
 CHARGEABILITY CONTOUR PLAN
 200' ELECTRODE SPACING
 SCALE: 1"=400'

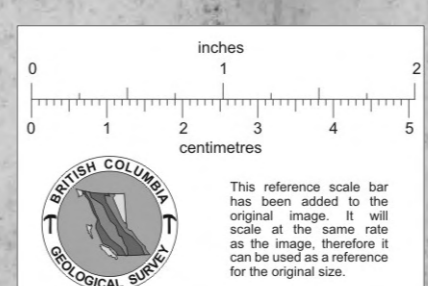

SCALE IN FEET
 SURVEY BY SEIGEL ASSOCIATES LIMITED
 JUNE, 1970

TO ACCOMPANY A GEOPHYSICAL REPORT
 BY J.G. BAIRD DATED AUGUST 13, 1970