

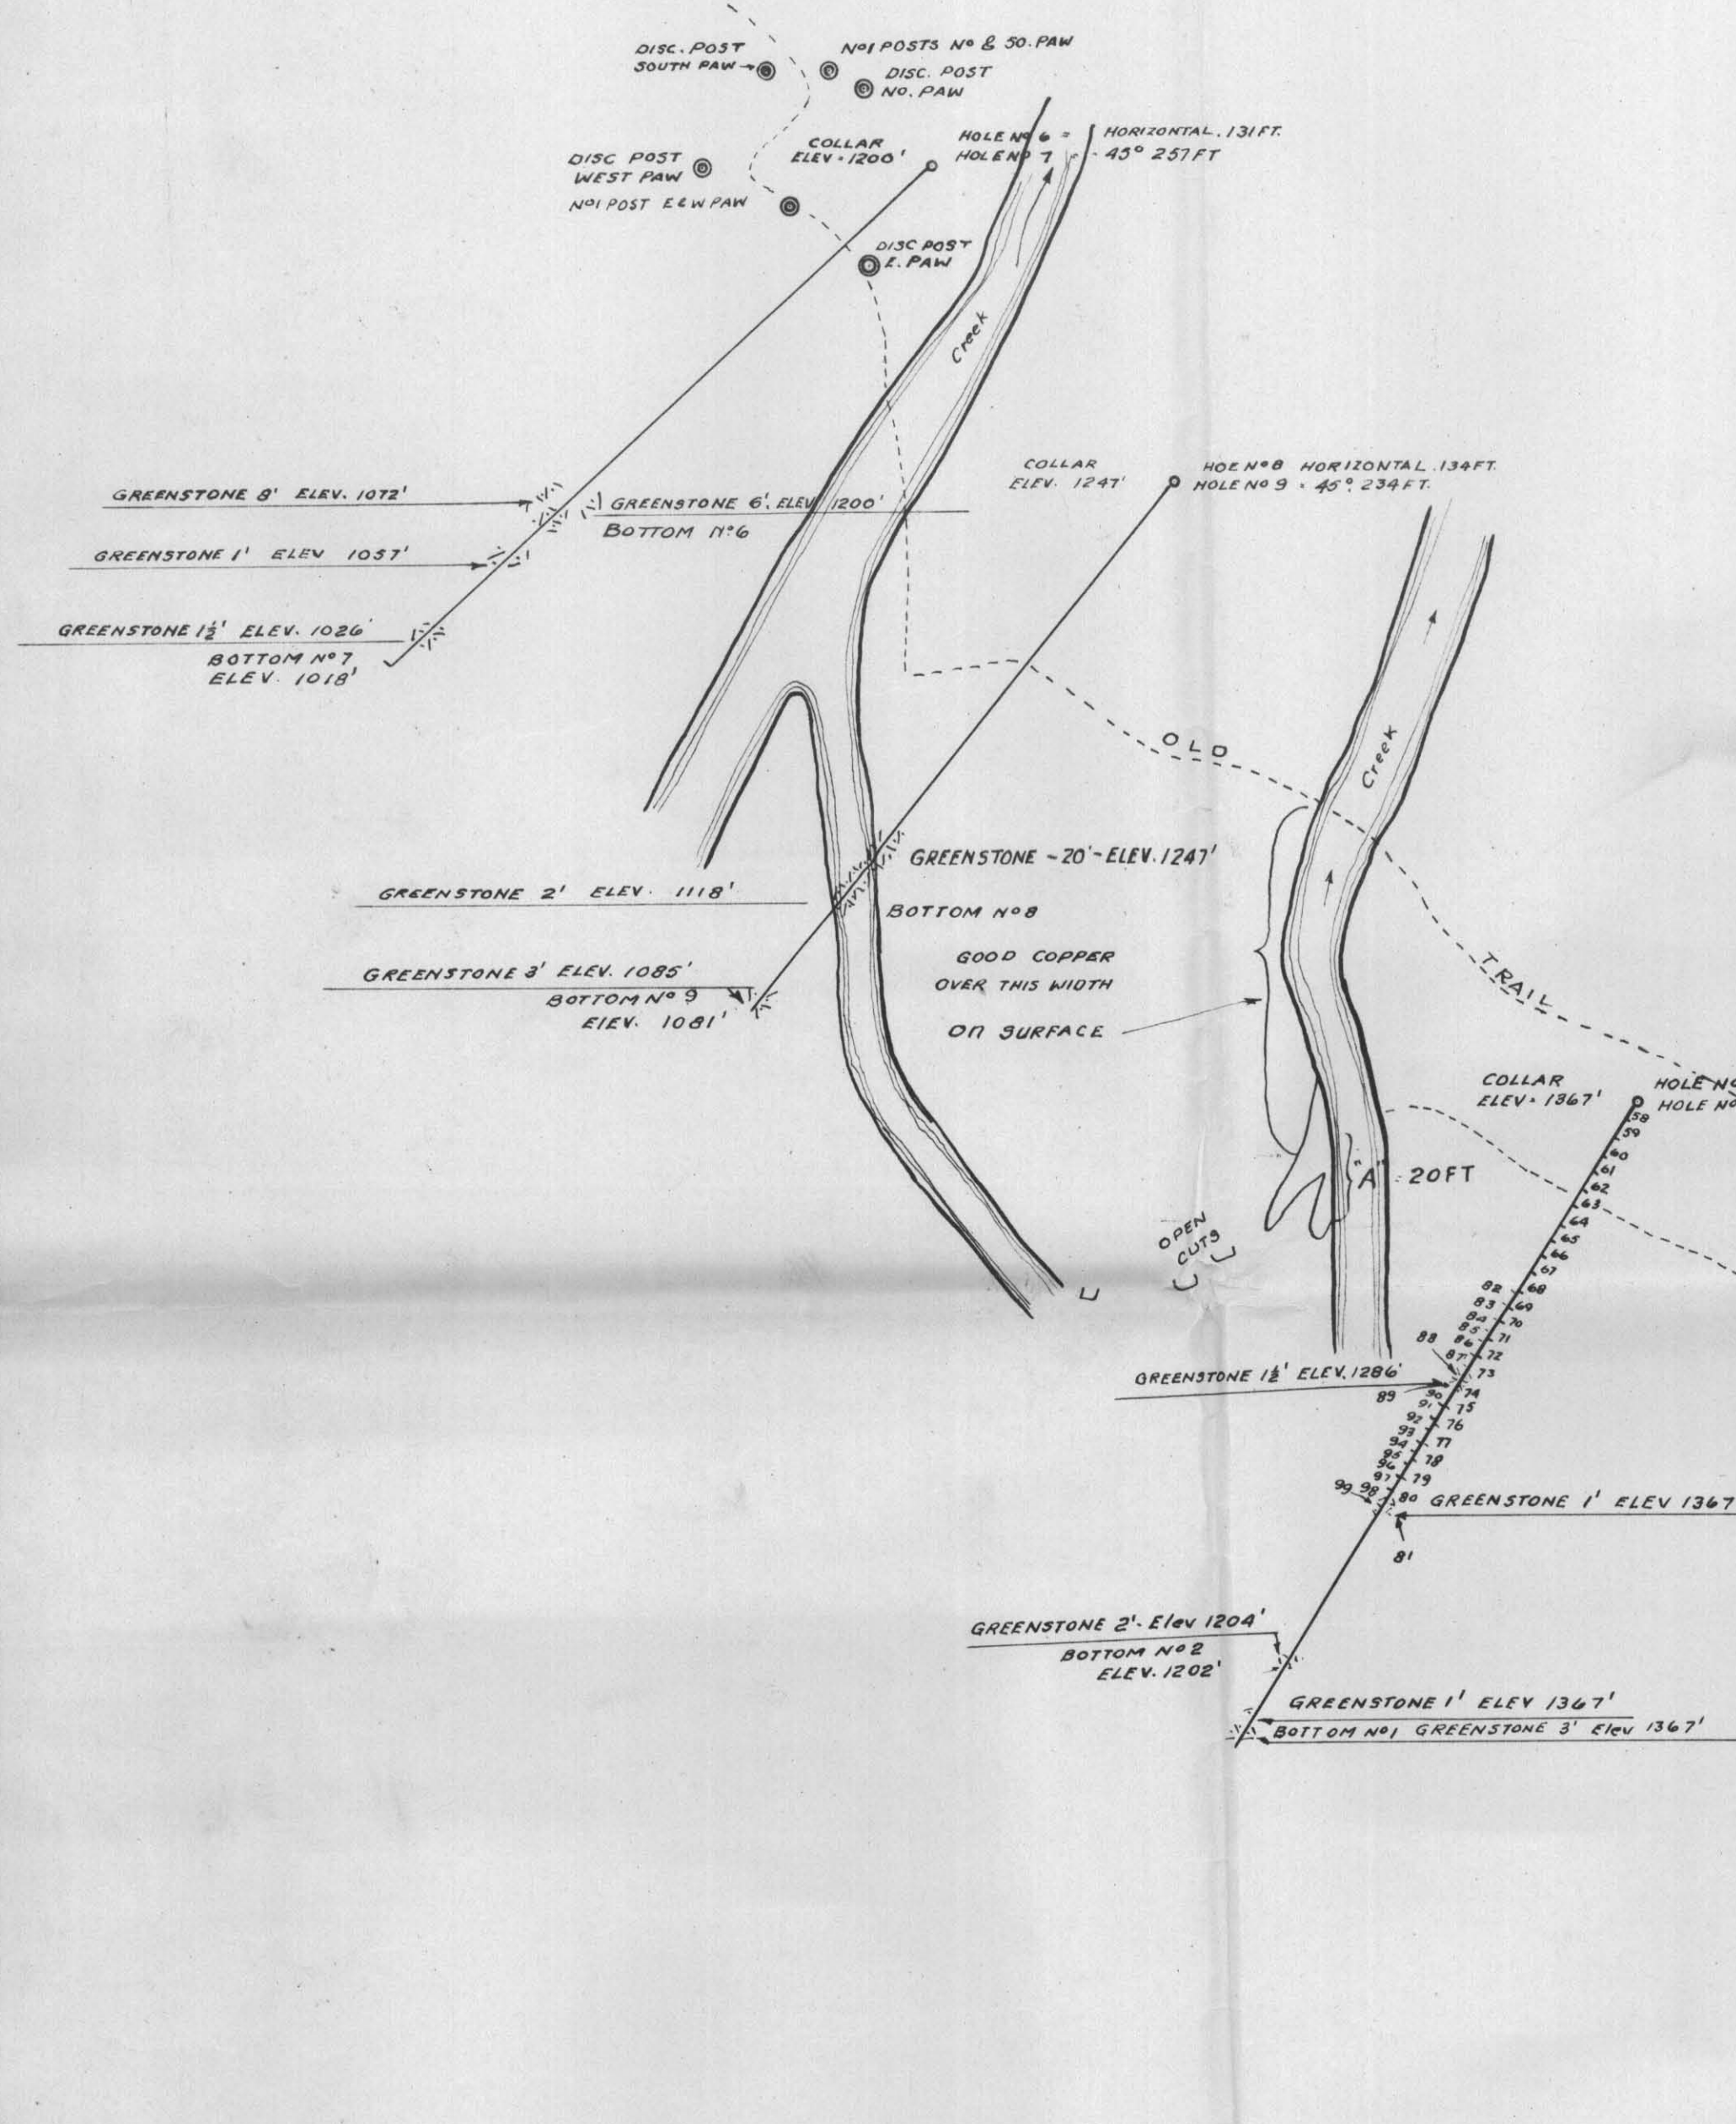


# PARAMOUNT MINING CO.

## MAP SHOWING OPEN CUTS AND DRILL HOLES, SOUTH SIDE MYRA CREEK

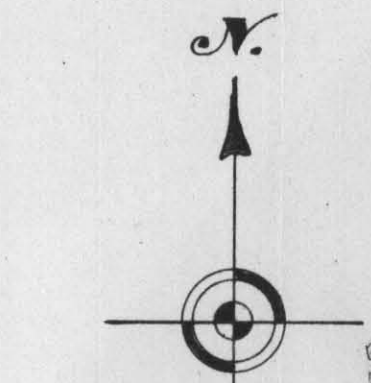

NOTE: WHERE TWO HOLES ARE TOGETHER, NUMBERS ON RIGHT INDICATE SAMPLES FROM HORIZONTAL HOLE, AND THOSE ON LEFT INDICATE SAMPLES FROM INCLINED HOLES



Scale, 1 in. = 40 ft.

### SURFACE

NO.	DESCRIPTION	WIDTH	REMARKS	Gold VALUE	oz SILVER	% COPPER
"A"	OPEN CUT	20 FT	KAEADING			3.76
"A"	"	"	TEMISKAMING	2.06	2.0	5.29
"B"	"	"	"	4.40	5.82	4.40
"B"	"	"	SELECTED	17.50	14.3	13.0

92F/12E  
92F-72  
PROPERTY FILE

### TABLE OF ASSAY RESULTS

SAMPLE NO	HOLE NO	DEPTH	REMARKS	OZ PER TON		PERCENT %	
				GOLD	SILVER	COPPER	ZINC
1	50	10 160-165		0.02	0.20	0.07	0.03
2	60	10 165-170		0.12	1.90	0.35	2.51
3	60	10 170-175		0.08	0.80	0.25	0.37
4	100	" 175-180		0.52	25.50	1.05	11.13
5	100	" 180-185		0.66	45.19	1.25	2.42
6	90	" 185-190		0.05	1.44	0.17	2.42
7	90	" 190-195		0.02	0.40	0.11	6.17
8	80	" 195-200	Less in last 30"	TRACE	0.08	0.07	1.96
9	80	" 200-205		0.02	1.58	0.17	0.00
10	80	" 205-210		TRACE	0.14	0.23	0.18
11	80	" 210-215	(30 to 200 not sampled - greenstone)	TRACE	TRACE	0.06	0.92
12	70	" 215-220		0.01	0.36	1.13	18.30
13	80	" 220-225		0.02	0.44	1.53	10.33
14	60	" 225-230		0.11	0.24	0.74	6.71
15	35	3 0-5		0.02	0.24	0.04	1.04
16	70	3 5-10		TRACE	0.66	0.05	1.07
17	80	" 10-15		0.01	0.24	0.04	1.39
18	80	" 15-20		0.02	0.18	0.73	2.34
19	80	" 20-25		0.02	0.28	0.20	2.23
20	70	" 25-30		0.04	1.48	0.00	20.11
21	80	" 30-35	Solid Sulphides	0.14	1.66	5.20	0.00
22	80	" 35-40		TRACE	0.35	0.06	0.61
23	80	" 40-45		0.04	1.62	2.10	16.12
24	80	" 45-50		0.02	2.09	1.30	0.00
25	70	" 50-55		0.01	0.28	0.17	0.18
26	80	" 55-60		TRACE	TRACE	0.57	2.57
27	33	3 60-64	Greenstone 6 1/2' to 70'	0.02	0.12	0.15	0.00
28	73	4 90-95		TRACE	TRACE	0.13	0.32
29	80	" 95-100		0.02	0.18	TRACE	0.24
30	80	" 100-105		TRACE	TRACE	0.09	0.33
31	100	" 105-110		TRACE	TRACE	0.16	0.30
32	95	" 110-115		TRACE	TRACE	0.00	0.15
33	95	" 115-120		0.01	0.04	0.26	0.00
34	95	" 120-125		TRACE	TRACE	0.44	0.66
35	95	" 125-130		TRACE	TRACE	TRACE	0.09
36	95	" 130-135		TRACE	TRACE	0.09	0.15
37	100	" 135-140		TRACE	TRACE	0.22	1.24
38	90	" 140-145		0.01	0.08	0.09	0.00
39	90	" 145-150		0.02	0.08	0.07	0.00
40	80	" 150-155		TRACE	TRACE	0.36	0.00
41	80	" 155-160	6' Solid at 158'	TRACE	TRACE	0.75	0.00
42	90	" 160-165		TRACE	TRACE	0.90	0.00
43	80	" 165-170		0.02	0.16	0.25	0.33
44	80	" 170-175		0.01	0.18	0.20	0.39
45	85	" 175-180		TRACE	TRACE	0.25	0.39
46	85	" 180-185		TRACE	TRACE	0.05	0.28
47	85	" 185-190		0.005	0.24	0.43	0.75
48	80	" 190-195	18 1/2' to 190' NO CORE	TRACE	0.10	0.16	0.57
49	90	" 195-200		TRACE	0.08	0.06	0.15
50	80	" 200-205		TRACE	TRACE	0.06	0.26
51	85	" 205-210		0.005	0.18	0.31	0.09
52	85	" 210-215		0.005	0.10	0.28	0.00
53	90	" 215-220		0.005	0.20	0.29	0.00
54	80	" 220-225		0.01	0.26	0.75	0.00
55	80	" 225-230		0.005	0.12	0.16	0.00
56	80	" 230-235	Greenstone to end 240'	0.005	0.06	0.21	0.00
57	70	1 0-5		TRACE	TRACE	0.18	0.45
58	85	" 5-10		TRACE	TRACE	0.14	0.24
59	100	" 10-15		TRACE	TRACE	0.04	0.21
60	100	" 15-20		0.02	0.23	1.23	0.12
61	100	" 20-25		0.02	0.18	0.75	0.18
62	100	" 25-30		0.02	0.16	0.41	0.00
63	100	" 30-35		0.005	0.08	0.31	0.00
64	90	" 40-45		TRACE	0.08	0.44	0.27
65	95	" 45-50		TRACE	0.04	0.26	3.03
66	95	" 50-55		TRACE	TRACE	0.41	0.61
67	100	" 55-60		TRACE	TRACE	0.46	3.03
68	100	" 60-65		TRACE	0.18	1.55	3.08
69	100	" 65-70		TRACE	0.16	0.34	0.61
70	90	" 70-75		TRACE	TRACE	NONE	0.00
71	70	" 75-80		0.01	0.26	0.97	0.00
72	100	" 80-85		0.02	0.12	0.75	2.12
73	100	" 85-90		0.01	0.10	0.46	1.21
74	100	" 90-95		TRACE	0.16	0.70	0.00
75	80	" 100-105		TRACE	0.14	0.33	0.00
76	80	" 105-110		TRACE	0.28	2.25	0.00
77	100	" 110-115		TRACE	0.06	0.25	0.00
78	100	" 115-120		TRACE	TRACE	0.03	0.00
79	95	" 120-125		0.01	0.04	0.55	0.00
80	100	" 125-130		0.01	0.10	0.40	0.00
81	90	" 130-135		0.01	0.08	0.20	0.00
82	95	" 135-140		TRACE	TRACE	NONE	0.00
83	95	" 140-145		TRACE	TRACE	NONE	0.00
84	95	" 145-150		TRACE	TRACE	NONE	0.00
85	95	" 150-155		TRACE	TRACE	NONE	0.00
86	95	" 155-160		TRACE	TRACE	NONE	0.00
87	95	" 160-165		TRACE	TRACE	NONE	0.00
88	95	" 165-170		TRACE	TRACE	NONE	0.00
89	95	" 170-175		0.01	0.08	0.31	0.00
90	95	" 175-180		TRACE	TRACE	NONE	0.00
91	90	" 180-185		TRACE	0.06	0.18	0.00
92	95	" 185-190		TRACE	0.12	0.10	0.00
93	95	" 190-195		TRACE	0.04	0.18	0.00
94	80	" 200-205		TRACE	TRACE	TRACE	0.00
95	80	" 205-210		0.005	0.06	0.18	0.00
96	80	" 210-215		TRACE	0.04	0.05	0.00
97	75	" 215-220		TRACE	0.08	0.05	0.00
98	75	" 220-225		TRACE	0.08	0.08	0.00
99	80	" 225-230		TRACE	0.15	0.10	0.00
100	100	" 230-235		0.01	0.10	0.18	0.00
101	100	" 235-240		TRACE	0.10	0.18	0.00
102	100	" 240-245		TRACE	0.12	0.10	0.00
103	100	" 245-250		TRACE	0.20	0.05	0.00
104	100	" 250-255		TRACE	TRACE	TRACE	0.00
105	95	" 255-260	21' of CORE	TRACE	TRACE	TRACE	0.00
106	75	" 260-265		TRACE	0.12	0.10	0.00
107	90	" 265-270		0.01	0.18	0.45	0.00
108	75	" 270-275		TRACE	0.06	0.12	0.00
109	85	" 275-280		TRACE	0.06	0.10	0.00
110	90	" 280-285		TRACE	TRACE	NONE	0.00
111	90	" 285-290		TRACE	TRACE	NONE	0.00
112	95	" 290-295		TRACE	0.04	0.10	0.00
113	75	" 295-300		TRACE	0.08	0.25	0.00
114	65	" 300-305		0.01	0.12	0.70	0.00
115	100	" 305-310		0.01	0.18	0.60	2.78
116	100	" 310-315		0.01	0.10	0.46	5.13
117	100	" 315-320		TRACE	0.06	0.18	0.00
118	100	" 320-325		TRACE	0.08	0.25	0.91
119	85	" 325-330		TRACE	0.04	0.21	0.00
120	70	" 330-335		TRACE	0.08	0.25	0.00
121	100	" 335-340		TRACE	0.08	0.18	0.91
122	100	" 340-345		TRACE	0.04	0.25	0.00
123	100	" 345-350		TRACE	0.10	0.10	0.00
124	80	" 350-355		TRACE	0.04	0.05	0.00
125	70	" 355-360		TRACE	TRACE	0.18	0.00
126	100	" 360-365		TRACE	TRACE	NONE	0.00
127	95	" 365-370		TRACE	TRACE	NONE	0.00
128	100	" 370-375		TRACE	TRACE	0.11	0.00
129	80	" 375-380		TRACE	TRACE	0.18	0.00
130	100	" 380-385		TRACE	TRACE	TRACE	0.00
131							4.25
132							2.42
133							26.01
134							18.45
135							18.15
136							6.05
137							11.49
138							8.31
139							5.05
140							0.61
141							1.92
142							8.31
143							1.21
144							1.82

006891