

Anderson

675142
1040/16

Regional Resources Ltd.

1980 - 1055 West Hastings Street, Guinness Tower, Vancouver, B.C. V6E 2E9
Telephone: (604) 669-3398

NEWS

For Release: June 20, 1984

Contact: J. W. Stollery (604) 669-3398

MIDWAY PROPERTY

Additional silver-zinc-lead intersections have been encountered in drill holes spaced at 250 foot intervals in the Silver Creek area. Results from the first six holes, 84-53 through 84-58, were previously reported on June 8.

Assays from five more holes, 84-59 to 84-63, are reported below. (Refer to attached plan for hole locations).

Hole	From (ft) - To (ft)	Core Length	oz/ton Silver	% Zinc	% Lead	% Zinc+Lead
84-59	582.3 - 588.2	5.9 ft	4.77	23.65	2.21	25.86
84-60	351.2 - 392.7	41.5 ft	21.30	9.23	15.34	24.57
84-61	220.8 - 231.0	10.2 ft	7.53	7.53	7.88	15.41
84-62	245.1 - 253.9	8.8 ft	9.25	5.66	3.83	9.49
84-63	459.3 - 465.2	5.9 ft	4.47	11.14	0.96	12.10
	510.8 - 516.7	5.9 ft	3.50	12.00	2.59	14.59

In addition to the above, gold values of 0.088 oz/ton over 9.9 feet and 0.096 oz/ton over 8.0 feet were encountered in two separate intervals in hole 84-60.

Preliminary 1984 calculations indicate a considerable increase in geological reserves and grades as follows:

	1983 Mineral Inventory					1984 Mineral Inventory (Includes Holes 84-53 to 84-63)				
	Short tons	oz/ton Silver	% Zinc	% Lead	% Zinc+Lead	Short tons	oz/ton Silver	% Zinc	% Lead	% Zinc+Lead
Discovery	4,011,590	10.46	12.88	5.15	18.03	4,011,590	10.46	12.88	5.15	18.03
Silver Creek	667,820	8.51	8.94	4.98	13.92	1,413,560	14.04	10.59	9.81	20.40
	4,679,410	10.18	12.32	5.13	17.45	5,425,150	11.39	12.28	6.36	18.64


Three drills are continuing to explore the Silver Creek deposit.

The Midway property is 51% owned and managed by Regional with Canamax Resources Inc. and Procan Exploration Company together holding a 49% interest.

Regional is listed on the Toronto and Vancouver Stock Exchanges under the symbol RGL.

REGIONAL RESOURCES LTD.

By: John W. Stollery, President

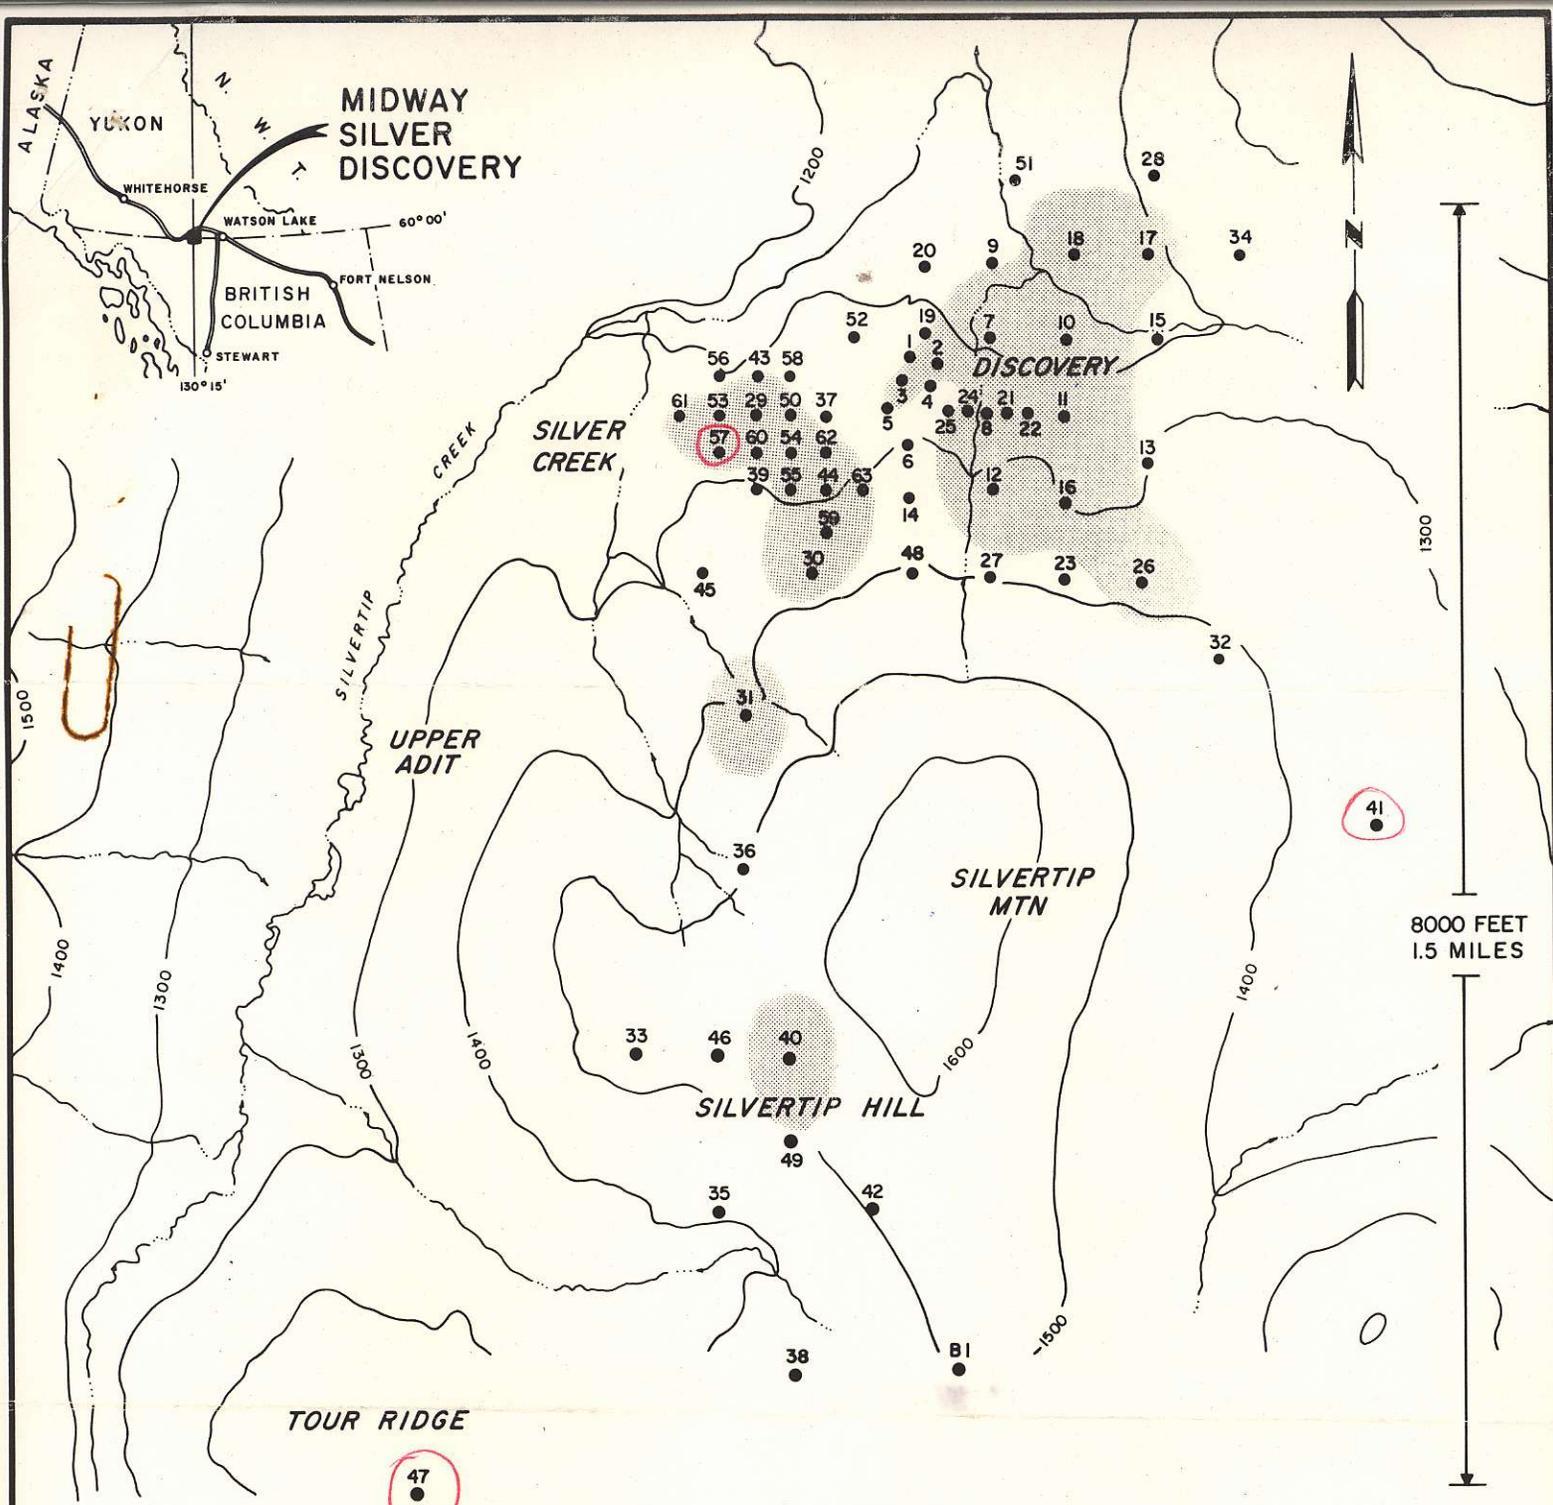

SUMMARY OF LOWER ZONE INTERSECTIONS


DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton	DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton
81-1	-70°	330°	406.0- 410.0	4.0	6.92	4.06	10.98	4.89	83-31	-80°	270°	1545.0-1548.9	3.9	3.55	4.20	7.75	5.05
81-2	-70°	300°	465.9- 469.0	3.1	3.02	1.70	4.72	2.91	83-40	-80°	270°	1043.0-1049.7	6.7	6.60	4.34	10.94	10.10
81-3	-70°	300°	373.1- 381.1	8.0	5.24	11.80	17.04	16.18				1454.1-1455.0	0.9	1.69	48.27	49.96	68.20
81-5	-70°	300°	386.6- 390.9	4.3	1.87	0.86	2.73	1.27	83-43	-80°	270°	64.6- 77.7	13.1	1.35	10.15	11.50	14.10
82-7	-70°	270°	633.6- 650.0	16.4	4.85	3.07	7.92	11.05	83-44	-80°	270°	433.2- 438.8	5.6	7.32	1.65	8.97	3.80
82-8	-70°	270°	671.3- 700.5	29.2	15.80	10.58	26.38	20.15	83-50	-80°	270°	157.1- 195.5	38.4	0.50	1.51	2.01	3.31
			743.1- 746.4	3.3	10.10	14.15	24.25	24.00				208.0- 217.2	9.2	11.05	0.23	11.28	0.39
82-9	-70°	270°	650.6- 651.9	1.3	13.31	1.25	14.56	3.44	84-53	-90°	0°	196.9- 214.9	18.0	15.31	8.83	24.14	12.13
82-10	-70°	270°	823.2- 841.9	18.7	5.95	7.95	13.90	11.30	84-54	-90°	0°	262.8- 273.0	10.2	10.82	12.30	23.12	19.54
			805.8- 813.3	7.5	6.30	0.86	7.16	4.55	84-55	-80°	270°	426.2- 436.4	10.2	10.97	2.88	13.85	4.37
82-11	-80°	270°	1037.1-1046.0	8.9	15.54	7.80	23.34	17.40	84-57	-90°	0°	339.9- 369.8	29.9	11.36	12.94	24.30	17.40
82-12	-70°	270°	935.0- 940.0	5.0	6.95	7.48	14.43	12.98									
82-13	-90°		1723.4-1723.9	0.5	11.00	5.25	16.25	8.37									
82-16	-80°	270°	1257.9-1281.8	23.9	18.96	5.63	24.59	9.52									
82-17	-80°	270°	1584.1-1588.7	4.6	21.39	1.78	23.17	13.80									
82-18	-80°	270°	1015.8-1024.0	8.2	7.40	2.38	9.78	4.75									
82-20	-80°	270°	532.5- 534.8	2.3	12.00	1.85	13.85	2.76									
83-21	-70°	270°	761.0- 774.6	13.6	7.45	5.90	13.35	8.13									
			861.9- 876.8	14.9	14.07	17.44	31.51	25.15									
83-23	-80°	270°	1694.3-1696.9	2.6	9.55	0.19	9.74	1.64									
83-24	-70°	270°	671.8- 673.9	2.1	8.30	11.20	19.50	19.80									
			687.7- 693.6	5.9	6.80	4.60	11.40	7.31									
83-26	-80°	270°	1853.7-1860.3	6.6	31.00	0.35	31.05	0.45									
83-27	-80°	270°	1254.3-1259.5	5.2	1.92	3.01	4.93	4.75									
83-29	-80°	270°	212.9- 223.4	10.5	14.92	11.43	26.35	18.10									
83-30	-80°	270°	901.2- 904.8	3.6	11.10	0.30	11.40	5.28									

*Assay based on 9.5 feet of core recovered

LEGEND

- DIAMOND DRILL HOLE
- TOPOGRAPHIC CONTOUR IN METRES
- CREEK
- SILVER, ZINC, LEAD DEPOSIT

REGIONAL RESOURCES LTD.
DIAMOND DRILL HOLE PLAN
 MIDWAY
 SILVER ZINC LEAD PROPERTY

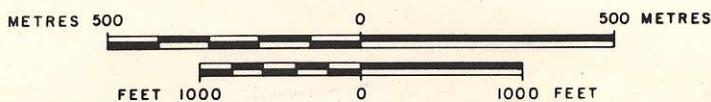

JUNE 19, 1984