
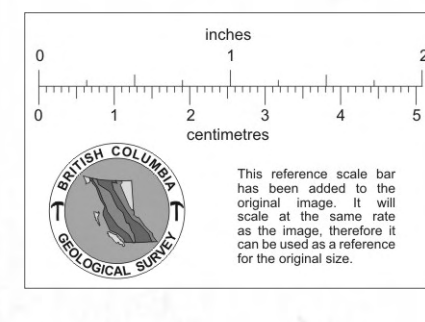


44W 40W 36W 32W 28W 24W 20W 16W 12W 8W 4W 0 4E 8E 12E 16E 20E 24E 28E 32E 36E 40E

BASE LINE

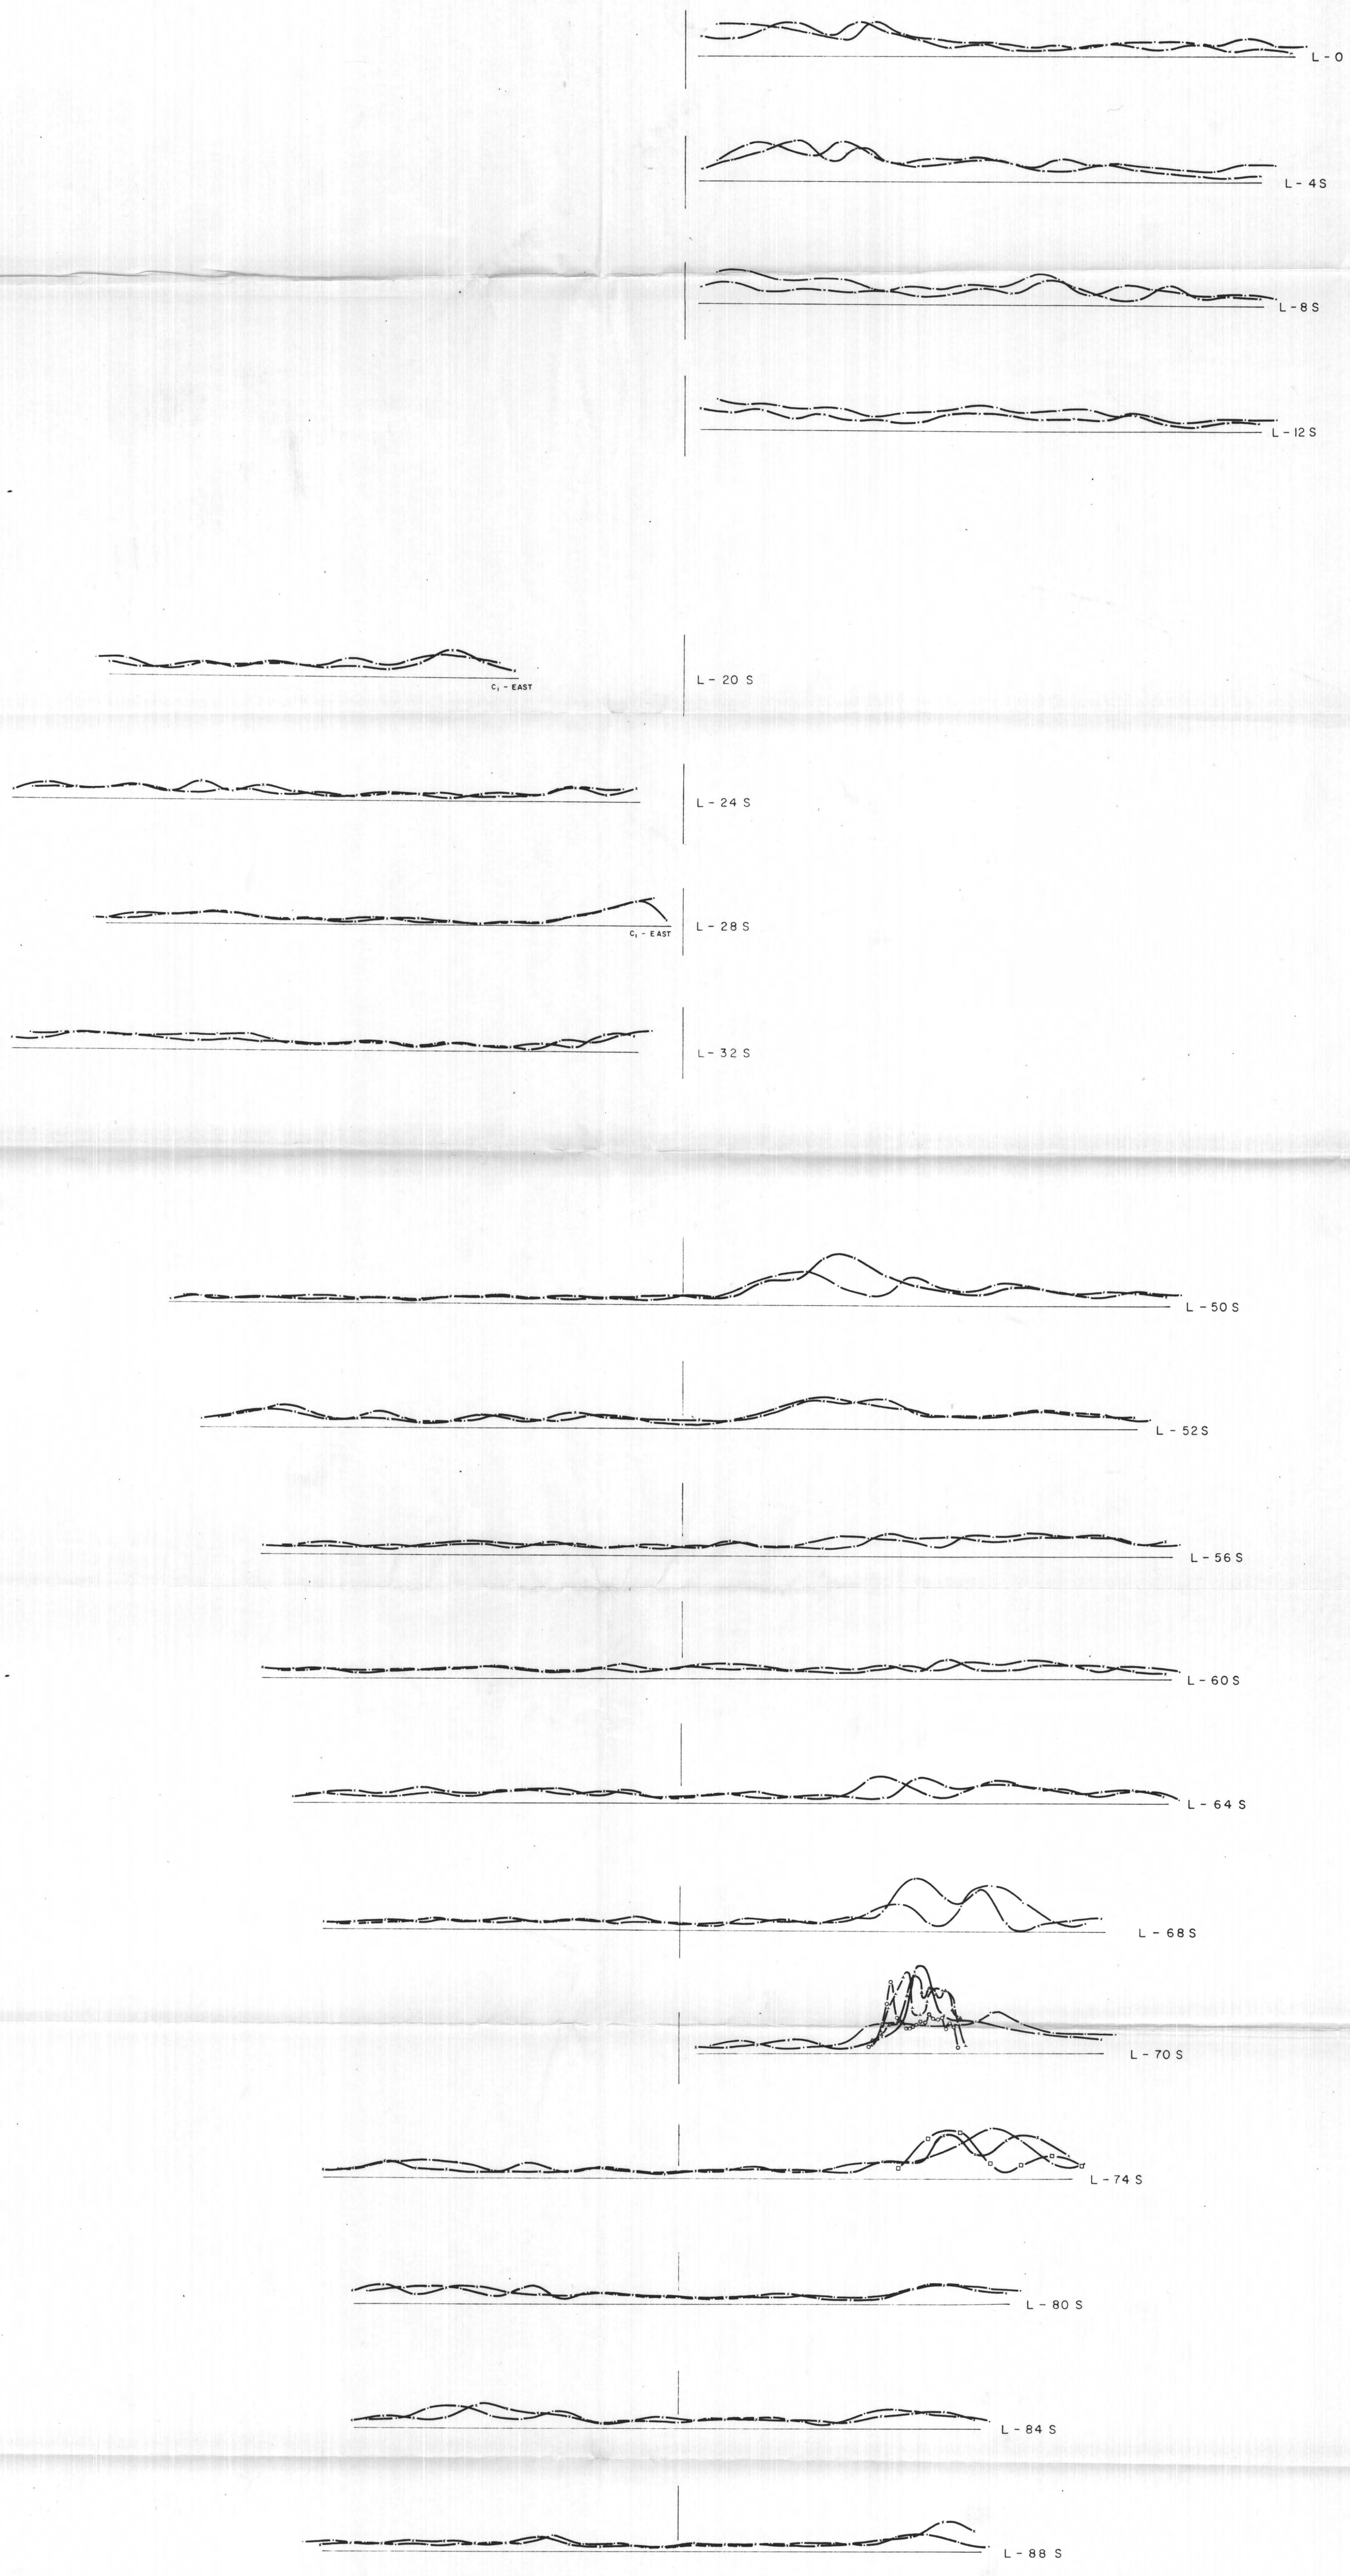

LEGEND:
 CHARGEABILITY SCALE: 1" = 10 MILLISECONDS
 ELECTRODE SPACING:
 100' ————
 200' ————
 400' ————
 600' ————
 50' ————
 25' ————

NOTES:
 SCINTREX MK VII INDUCED POLARIZATION INSTRUMENTATION
 THREE ELECTRODE ARRAY
 INFINITE CURRENT ELECTRODE
 MOVING CURRENT ELECTRODE
 POTENTIAL ELECTRODE
 C₁ WEST OF ARRAY, UNLESS INDICATED OTHERWISE.

PLATE 3
 TEXACAL RESOURCES LTD.
 NEWMAN PENINSULA
 BABINE LAKE AREA, BRITISH COLUMBIA
 INDUCED POLARIZATION SURVEY
 CHARGEABILITY PROFILES
 1" = 400'
 SCALE IN FEET
 SURVEY BY SEIGEL ASSOCIATES LIMITED
 AUGUST 1970