




MEAN FLIGHT LINE SPACING ----- 2640 FEET  
 MEAN GROUND CLEARANCE ----- 200 FEET  
 FLIGHT LINES -----  
 FIDUCIAL POINTS ----- 3690  
 ELECTROMAGNETIC CONTOURS 100, 200, 300, etc. -----  
 10, 20, 30, etc. -----

THE CONTOURS REPRESENT THE ELECTROMAGNETIC RESPONSE OF THE IN PHASE COMPONENT OF THE SECONDARY FIELD IN UNITS OF 100 PARTS PER MILLION.


$\frac{20}{40}$  REPRESENTS  $\frac{\text{IN PHASE COMPONENT}}{\text{OUT OF PHASE COMPONENT}}$  OF SECONDARY FIELD

AIRBORNE GEOPHYSICAL SURVEY  
 FRASER LAKE AREA, BRITISH COLUMBIA  
 ELECTROMAGNETIC MAP

SCALE: 1 INCH TO 2640 FEET

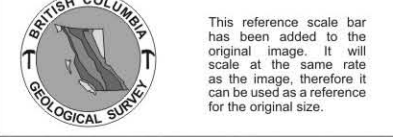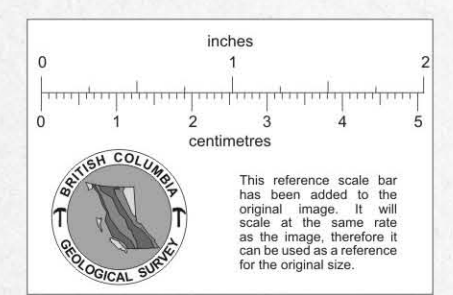

Flown and Compiled for  
 CYPRUS EXPLORATION CORPORATION LIMITED  
 by  
 LOCKWOOD SURVEY CORPORATION LIMITED  
 TORONTO, CANADA  
 1969

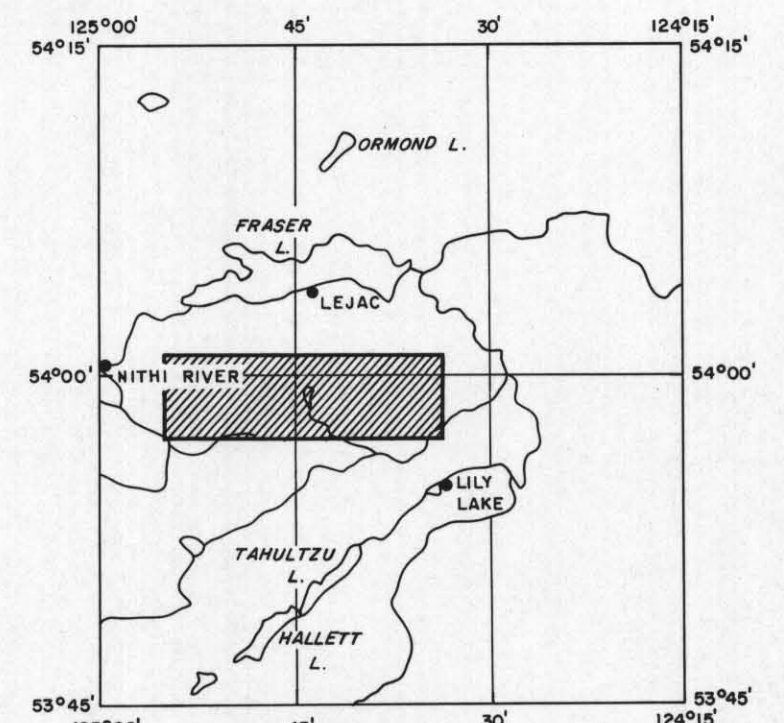

812074