Canamera
827617
92B/13

IPR-11 SPECTRAL ANALYSIS SUMMARY

LINE NO. : 1300

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
900	1	574.6	2000.0	5.9	123.78	.10	.20	-2000.00	-2000.000	1.67	-2000.00
925	1	1102.0	3460.0	5.8	211.99	100.00	.10	-2000.00	-2000.000	1.48	-2000.00
	2	221.5	2086.0	8.5	178.50	.10	.20	-2000.00	-2000.000	1.61	-2000.00
950	1	1173.0	3060.0	5.1	107.03	.10	.20	-2000.00	-2000.000	1.68	-2000.00
	2	427.1	3352.0	6.8	238.77	1.00	.10	-2000.00	-2000.000	3.62	-2000.00
	3	130.1	2030.0	7.8	144.87	10.00	.20	-2000.00	-2000.000	4.35	-2000.00
975	1	1666.0	3730.0	4.0	85.55	.10	.20	-2000.00	-2000.000	4.30	-2000.00
	2	433.2	2914.0	7.0	75.88	.30	.40	-2000.00	-2000.000	6.61	-2000.00
	3	219.3	2940.0	6.6	236.95	30.00	.10	-2000.00	-2000.000	.76	-2000.00
	4	88.2	1978.0	7.0	281.16	.01	.10	-2000.00	-2000.000	3.88	-2000.00
1000	1	589.0	1155.0	3.4	96.04	.01	.20	-2000.00	-2000.000	5.24	-2000.00
	2	387.6	2281.0	5.7	135.76	.03	.20	-2000.00	-2000.000	2.98	-2000.00
	3	166.5	1950.0	7.4	291.40	.01	.10	-2000.00	-2000.000	1.54	-2000.00
	4	101.3	1980.0	6.9	271.51	.01	.10	-2000.00	-2000.000	1.55	-2000.00
	5	49.6	1459.0	7.6	161.62	.10	.20	-2000.00	-2000.000	2.46	-2000.00
1025	1	448.0	879.0	2.8	68.46	.01	.30	-2000.00	-2000.000	3.38	-2000.00
	2	307.1	1808.0	4.4	115.69	.01	.20	-2000.00	-2000.000	1.99	-2000.00
	3	253.7	2980.0	6.2	130.87	.10	.20	-2000.00	-2000.000	2.23	-2000.00
	4	130.1	2550.0	6.5	150.52	.03	.20	-2000.00	-2000.000	1.88	-2000.00
	5	85.7	2522.0	7.0	247.33	30.00	.10	-2000.00	-2000.000	1.18	-2000.00
1050	1	691.7	1551.0	.9	21.93	100.00	.50	-2000.00	-2000.000	19.08	-2000.00
	2	199.1	1339.0	3.4	83.78	.01	.30	-2000.00	-2000.000	3.72	-2000.00
	3	183.3	2460.0	4.6	194.08	.01	.10	-2000.00	-2000.000	5.03	-2000.00
	4	156.6	3510.0	6.3	67.67	.30	.40	-2000.00	-2000.000	3.35	-2000.00
	5	87.9	2956.0	6.5	263.76	.10	.10	-2000.00	-2000.000	5.11	-2000.00
1075	1	600.9	857.0	1.1	26.72	30.00	.20	-2000.00	-2000.000	11.99	-2000.00
	2	624.9	2675.0	1.6	62.72	.30	.10	-2000.00	-2000.000	1.77	-2000.00
	3	184.0	1570.0	3.8	75.22	.03	.40	-2000.00	-2000.000	3.30	-2000.00
	4	202.9	2890.0	5.0	78.91	.10	.30	-2000.00	-2000.000	3.58	-2000.00
	5	181.6	3880.0	6.7	256.20	30.00	.10	-2000.00	-2000.000	8.00	-2000.00
1100	1	460.1	963.0	1.2	54.65	.10	.10	-2000.00	-2000.000	6.91	-2000.00
	2	234.1	1470.0	1.6	40.40	.01	.30	-2000.00	-2000.000	2.69	-2000.00
	3	294.8	3690.0	2.0	80.78	100.00	.10	-2000.00	-2000.000	1.73	-2000.00
	4	85.9	1798.0	4.1	80.95	.03	.40	-2000.00	-2000.000	2.63	-2000.00
	5	104.1	3260.0	5.3	137.60	.01	.20	-2000.00	-2000.000	1.50	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
1125	1	586.1	1226.0	1.7	75.01	.10	.10	-2000.00	-2000.000	6.14	-2000.00
	2	282.6	1774.0	2.1	49.91	.01	.30	-2000.00	-2000.000	4.48	-2000.00
	3	156.5	1960.0	1.9	32.17	.10	.30	-2000.00	-2000.000	2.98	-2000.00
	4	211.7	4430.0	2.4	47.91	.30	.20	-2000.00	-2000.000	2.06	-2000.00
	5	61.3	1923.0	4.8	118.99	.01	.30	-2000.00	-2000.000	3.99	-2000.00
1150	1	711.5	1718.0	2.2	43.15	.03	.30	-2000.00	-2000.000	2.95	-2000.00
	2	263.7	1910.0	2.5	48.69	.03	.30	-2000.00	-2000.000	2.58	-2000.00
	3	147.6	2130.0	2.5	70.38	.01	.20	-2000.00	-2000.000	3.01	-2000.00
	4	106.0	2560.0	3.3	77.28	.01	.20	-2000.00	-2000.000	13.61	-2000.00
	5	103.5	3740.0	2.0	24.15	.30	.40	-2000.00	-2000.000	16.33	-2000.00
1175	1	875.8	2115.0	2.8	66.38	.03	.20	-2000.00	-2000.000	2.22	-2000.00
	2	272.8	1976.0	3.6	87.24	.01	.30	-2000.00	-2000.000	1.82	-2000.00
	3	126.2	1820.0	2.6	23.66	.30	.70	-2000.00	-2000.000	11.10	-2000.00
	4	79.5	1920.0	3.3	65.90	100.00	.20	-2000.00	-2000.000	27.24	-2000.00
	5	47.8	1731.0	3.3	130.26	.01	.10	-2000.00	-2000.000	5.26	-2000.00
1200	1	840.0	1884.0	2.9	75.95	.01	.20	-2000.00	-2000.000	1.88	-2000.00
	2	317.6	2136.0	3.4	80.53	.03	.20	-2000.00	-2000.000	1.40	-2000.00
	3	132.1	1770.0	4.5	95.80	.10	.20	-2000.00	-2000.000	2.54	-2000.00
	4	68.3	1532.0	2.4	33.05	.10	.50	-2000.00	-2000.000	5.59	-2000.00
	5	47.2	1588.0	3.4	75.40	.10	.20	-2000.00	-2000.000	4.07	-2000.00
1225	1	818.8	1606.0	3.6	94.50	.01	.20	-2000.00	-2000.000	1.96	-2000.00
	2	327.0	1925.0	4.4	85.71	.03	.30	-2000.00	-2000.000	1.14	-2000.00
	3	178.3	2090.0	4.2	67.28	.10	.30	-2000.00	-2000.000	1.49	-2000.00
	4	84.5	1658.0	4.3	113.25	.01	.20	-2000.00	-2000.000	1.70	-2000.00
	5	46.7	1375.0	4.1	98.62	.03	.20	-2000.00	-2000.000	3.78	-2000.00
1250	1	844.8	2210.0	3.4	67.21	10.00	.20	-2000.00	-2000.000	1.77	-2000.00
	2	237.3	1862.0	5.2	117.81	.03	.20	-2000.00	-2000.000	1.90	-2000.00
	3	131.6	2060.0	5.5	140.94	.01	.20	-2000.00	-2000.000	1.60	-2000.00
	4	83.5	2184.0	5.3	112.87	.10	.20	-2000.00	-2000.000	1.80	-2000.00
	5	42.0	1647.0	5.1	131.70	.01	.20	-2000.00	-2000.000	2.01	-2000.00
1275	1	573.8	1501.0	3.9	163.25	.01	.10	-2000.00	-2000.000	2.25	-2000.00
	2	219.4	1722.0	5.2	120.29	.03	.20	-2000.00	-2000.000	1.01	-2000.00
	3	97.6	1529.0	6.3	148.23	.03	.20	-2000.00	-2000.000	1.40	-2000.00
	4	65.1	1702.0	6.1	155.25	.01	.20	-2000.00	-2000.000	1.26	-2000.00
	5	46.0	1804.0	6.0	137.65	.03	.20	-2000.00	-2000.000	1.73	-2000.00
1300	1	874.0	1960.0	5.5	128.15	.03	.20	-2000.00	-2000.000	1.67	-2000.00
	2	179.0	1204.0	5.9	155.30	.01	.20	-2000.00	-2000.000	2.10	-2000.00
	3	101.1	1350.0	5.8	50.80	.30	.50	-2000.00	-2000.000	3.67	-2000.00
	4	58.9	1321.0	8.4	190.72	100.00	.20	-2000.00	-2000.000	6.46	-2000.00
	5	44.1	1484.0	7.1	129.68	.03	.30	-2000.00	-2000.000	3.02	-2000.00
1325	1	1341.0	3500.0	7.5	170.78	.03	.20	-2000.00	-2000.000	1.75	-2000.00
	2	172.3	1352.0	9.3	233.45	.01	.20	-2000.00	-2000.000	.69	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
	3	68.7	1075.0	8.7	215.55	.01	.20	-2000.00	-2000.000	1.44	-2000.00
	4	45.4	1186.0	9.7	332.98	100.00	.10	-2000.00	-2000.000	2.64	-2000.00
	5	29.9	1171.0	10.4	212.08	.10	.20	-2000.00	-2000.000	1.06	-2000.00
1350	1	466.8	1221.0	12.7	228.07	10.00	.20	-2000.00	-2000.000	1.13	-2000.00
	2	170.6	1339.0	14.9	478.36	.30	.10	-2000.00	-2000.000	1.00	-2000.00
	3	73.0	1143.0	15.2	466.34	30.00	.10	-2000.00	-2000.000	1.46	-2000.00
	4	38.6	1009.0	14.6	285.41	.10	.20	-2000.00	-2000.000	1.95	-2000.00
	5	28.1	1102.0	14.1	437.00	30.00	.10	-2000.00	-2000.000	1.42	-2000.00
1375	1	574.5	1061.0	14.7	265.16	30.00	.20	-2000.00	-2000.000	1.05	-2000.00
	2	217.9	1207.0	16.9	498.78	100.00	.10	-2000.00	-2000.000	1.14	-2000.00
	3	113.8	1250.0	14.6	293.98	.10	.20	-2000.00	-2000.000	1.48	-2000.00
	4	57.6	1063.0	17.1	293.37	30.00	.20	-2000.00	-2000.000	1.90	-2000.00
	5	33.7	933.0	14.2	461.01	1.00	.10	-2000.00	-2000.000	2.09	-2000.00
1400	1	479.3	1075.0	12.7	234.42	30.00	.20	-2000.00	-2000.000	1.17	-2000.00
	2	133.5	898.0	16.8	287.91	10.00	.20	-2000.00	-2000.000	1.05	-2000.00
	3	81.7	1097.0	14.8	455.69	100.00	.10	-2000.00	-2000.000	.99	-2000.00
	4	50.4	1130.0	14.0	456.40	.30	.10	-2000.00	-2000.000	1.03	-2000.00
	5	28.3	952.0	13.5	432.49	1.00	.10	-2000.00	-2000.000	1.18	-2000.00
1425	1	573.2	1499.0	12.9	237.54	30.00	.20	-2000.00	-2000.000	1.24	-2000.00
	2	134.2	1053.0	18.5	311.89	10.00	.20	-2000.00	-2000.000	.75	-2000.00
	3	55.1	862.0	17.3	297.83	10.00	.20	-2000.00	-2000.000	1.36	-2000.00
	4	38.1	996.0	15.8	281.29	30.00	.20	-2000.00	-2000.000	1.39	-2000.00
	5	25.5	1000.0	13.8	496.99	.01	.10	-2000.00	-2000.000	.94	-2000.00
1450	1	593.4	1552.0	9.9	188.54	30.00	.20	-2000.00	-2000.000	1.42	-2000.00
	2	118.4	929.0	13.7	249.84	30.00	.20	-2000.00	-2000.000	.79	-2000.00
	3	45.0	705.0	18.1	306.11	10.00	.20	-2000.00	-2000.000	.53	-2000.00
	4	22.6	592.0	15.2	264.98	10.00	.20	-2000.00	-2000.000	.80	-2000.00
	5	16.9	663.0	12.8	230.69	10.00	.20	-2000.00	-2000.000	1.46	-2000.00
1475	1	1508.0	2630.0	6.3	226.23	30.00	.10	-2000.00	-2000.000	1.29	-2000.00
	2	254.6	1332.0	8.6	311.58	.10	.10	-2000.00	-2000.000	.45	-2000.00
	3	87.8	917.0	11.3	203.92	10.00	.20	-2000.00	-2000.000	1.37	-2000.00
	4	37.1	646.0	16.1	279.86	10.00	.20	-2000.00	-2000.000	.73	-2000.00
	5	21.7	567.0	12.6	402.68	100.00	.10	-2000.00	-2000.000	1.31	-2000.00

IPR-11 DATA SUMMARY

SURVEY : MINNOVA - MT. SICKER PROPERTY

INDEX FILE : L-1300W.IND
DATA FILE : L-1300W.DAT

LINE NO. = 1300

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1475	2	1	23.0	19.1	17.2	15.6	12.5	9.6	7.9	6.3	4.9	4.0	1508.0	-12.	2630.
		2	32.1	27.3	24.6	22.3	17.7	13.4	10.9	8.6	6.7	5.5	254.6	-1.	1332.
		3	38.8	33.0	29.9	27.3	21.9	16.8	13.9	11.3	8.9	7.3	87.8	29.	917.
		4	55.1	47.4	43.0	39.4	32.0	24.9	20.4	16.1	12.9	10.5	37.1	-6.	646.
		5	44.8	37.6	34.4	31.4	25.3	18.8	15.6	12.6	9.9	8.2	21.7	-20.	567.
1450	2	1	33.5	28.5	25.6	23.5	19.1	14.8	12.3	9.9	7.8	6.5	593.4	-2.	1552.
		2	45.7	39.4	35.6	33.0	26.8	20.7	17.0	13.7	10.8	9.0	118.4	19.	929.
		3	60.9	52.8	48.0	44.1	35.8	27.5	22.6	18.1	14.3	11.8	45.0	2.	705.
		4	51.3	44.8	41.1	37.5	30.4	23.3	18.9	15.2	11.9	9.7	22.6	-12.	592.
		5	42.6	37.5	34.9	31.6	25.8	19.8	16.0	12.8	10.1	8.6	16.9	7.	663.
1425	2	1	43.4	37.2	33.5	30.6	25.0	19.4	16.0	12.9	10.3	8.5	573.2	4.	1499.
		2	63.3	54.7	49.2	45.0	36.5	28.0	23.1	18.5	14.6	12.0	134.2	-9.	1053.
		3	60.3	52.0	46.6	42.6	34.6	26.5	21.4	17.3	13.9	11.4	55.1	2.	862.
		4	53.3	46.0	41.2	37.6	30.6	23.5	19.8	15.8	12.5	10.4	38.1	13.	996.
		5	53.2	45.3	40.1	36.4	28.9	21.7	17.5	13.8	10.8	8.9	25.5	-1.	1000.
1400	2	1	42.9	36.7	33.2	30.4	24.7	19.2	15.8	12.7	10.0	8.3	479.3	-18.	1075.
		2	57.5	49.3	44.4	40.7	32.9	25.4	20.9	16.8	13.3	11.0	133.5	-7.	898.
		3	52.6	44.9	40.4	36.8	29.6	22.6	18.5	14.8	11.7	9.7	81.7	26.	1097.
		4	52.7	44.3	39.7	35.9	28.5	21.7	17.5	14.0	10.9	9.0	50.4	5.	1130.
		5	49.8	42.0	37.9	34.1	27.1	20.6	16.7	13.5	10.4	8.7	28.3	-38.	952.
1375	2	1	49.5	42.4	38.3	35.2	28.6	22.2	18.3	14.7	11.7	9.6	574.5	-24.	1061.
		2	59.6	50.8	45.5	41.3	33.8	25.6	21.2	16.9	13.3	11.0	217.9	15.	1207.
		3	58.8	49.4	43.7	39.7	31.1	23.0	19.2	14.6	11.5	9.4	113.8	17.	1250.
		4	55.2	46.8	43.6	40.0	32.3	25.8	20.1	17.1	13.4	10.7	57.6	-30.	1063.
		5	54.5	46.2	39.4	36.2	29.9	23.0	18.5	14.2	11.4	9.4	33.7	-6.	933.
1350	2	1	44.2	37.7	33.9	31.1	25.1	19.3	15.9	12.7	10.0	8.3	466.8	8.	1221.

		2	56.0	47.2	41.7	38.0	30.4	23.0	18.7	14.9	11.6	9.5	170.6	1.	1339.
		3	56.1	47.5	42.1	38.6	30.8	23.2	19.1	15.2	11.9	10.0	73.0	-9.	1143.
		4	56.0	47.4	41.9	38.6	30.4	22.7	18.4	14.6	11.5	8.6	38.6	-5.	1009.
		5	50.9	43.4	38.3	35.3	28.4	21.2	17.3	14.1	11.2	9.0	28.1	-3.	1102.
1325	2	1	31.0	25.4	22.5	20.0	15.8	11.8	9.5	7.5	5.7	4.7	1341.0	-16.	3500.
		2	38.5	32.5	28.9	25.9	20.3	14.9	11.9	9.3	7.1	5.7	172.3	-24.	1352.
		3	36.3	30.0	26.5	23.8	18.7	13.8	11.1	8.7	6.5	5.0	68.7	11.	1075.
		4	35.2	29.8	26.7	24.1	19.4	14.7	12.1	9.7	7.8	6.7	45.4	5.	1186.
		5	41.2	34.2	30.4	27.7	22.0	16.2	13.2	10.4	8.0	6.5	29.9	17.	1171.
1300	2	1	23.1	18.9	16.5	15.1	11.8	8.7	7.0	5.5	4.3	3.4	874.0	-38.	1960.
		2	26.6	21.7	18.8	17.1	13.2	9.7	7.7	5.9	4.5	3.7	179.0	-4.	1204.
		3	24.6	20.3	17.8	16.3	12.6	9.2	7.3	5.8	3.7	2.9	101.1	18.	1350.
		4	32.4	27.2	23.9	21.9	17.2	13.7	10.7	8.4	8.1	6.5	58.9	25.	1321.
		5	30.6	25.1	21.7	20.0	15.8	10.8	9.1	7.1	5.0	3.9	44.1	-14.	1484.
1275	2	1	15.9	13.0	11.4	10.2	8.2	6.1	5.0	3.9	3.1	2.5	573.8	-10.	1501.
		2	21.0	17.6	15.6	14.0	11.1	8.2	6.6	5.2	4.0	3.2	219.4	11.	1722.
		3	26.5	22.0	19.4	17.4	13.8	10.2	8.2	6.3	5.0	4.0	97.6	33.	1529.
		4	25.9	21.3	18.7	16.7	13.2	9.6	7.7	6.1	4.6	3.7	65.1	-4.	1702.
		5	24.6	19.9	18.0	16.4	13.2	9.3	7.5	6.0	4.5	3.7	46.0	-13.	1804.
1250	2	1	11.8	9.7	8.9	8.2	6.6	5.1	4.3	3.4	2.7	2.2	844.8	-19.	2210.
		2	21.0	17.2	15.1	14.0	11.0	8.0	6.5	5.2	3.9	3.0	237.3	40.	1862.
		3	23.1	18.9	16.8	15.2	11.9	8.7	7.0	5.5	4.3	3.3	131.6	6.	2060.
		4	21.4	17.6	15.7	14.2	11.3	8.3	6.8	5.3	4.2	3.2	83.5	-4.	2184.
		5	22.0	17.7	15.5	14.0	11.1	8.1	6.5	5.1	4.0	3.1	42.0	-3.	1647.
1225	2	1	15.9	12.8	11.0	10.2	7.9	5.8	4.7	3.6	2.7	2.2	818.8	12.	1606.
		2	20.3	16.7	14.4	13.2	10.1	7.3	5.8	4.4	3.3	2.6	327.0	-5.	1925.
		3	18.2	15.0	12.9	11.9	9.3	6.9	5.5	4.2	3.2	2.5	178.3	7.	2090.
		4	18.8	15.6	13.4	12.2	9.4	6.9	5.6	4.3	3.3	2.7	84.5	5.	1658.
		5	17.6	14.6	12.6	11.7	8.9	6.8	5.1	4.1	3.1	2.8	46.7	-29.	1375.
1200	2	1	12.4	10.4	8.8	8.0	6.2	4.6	3.7	2.9	2.2	1.8	840.0	-13.	1884.
		2	14.2	12.0	10.3	9.3	7.3	5.4	4.4	3.4	2.6	2.1	317.6	-8.	2136.
		3	18.0	15.2	13.1	11.9	9.3	6.8	5.7	4.5	3.4	2.9	132.1	23.	1770.
		4	13.5	11.2	9.5	8.4	6.4	4.8	3.2	2.4	1.7	1.1	68.3	-22.	1532.
		5	14.0	11.7	10.1	9.2	7.2	5.4	4.9	3.4	2.8	2.1	47.2	-1.	1588.
1175	2	1	11.7	9.3	8.7	7.8	5.9	4.4	3.6	2.8	2.2	1.7	875.8	-19.	2115.
		2	18.1	14.0	12.3	11.3	8.5	6.0	4.7	3.6	2.6	2.1	272.8	12.	1976.
		3	14.5	11.5	10.8	10.0	7.9	6.1	4.9	2.6	2.0	1.2	126.2	-9.	1820.
		4	12.5	9.8	8.3	7.1	4.8	2.7	2.1	3.3	2.5	2.8	79.5	3.	1920.
		5	12.8	9.8	8.9	8.3	6.2	4.7	4.0	3.3	2.6	1.8	47.8	-18.	1731.
1150	2	1	10.5	8.2	7.1	6.4	4.9	3.6	2.9	2.2	1.7	1.3	711.5	1.	1718.
		2	11.7	9.3	8.1	7.3	5.6	4.0	3.2	2.5	1.9	1.5	263.7	-19.	1910.
		3	11.8	9.5	8.3	7.5	5.9	4.3	3.5	2.5	2.1	1.6	147.6	11.	2130.

		4	15.6	12.0	7.4	7.1	6.0	4.8	3.4	3.3	2.3	1.8	106.0	-33.	2560.
		5	6.8	6.2	8.7	7.7	5.3	3.3	3.2	2.0	1.5	1.3	103.5	-24.	3740.
1125	2	1	7.6	5.9	5.1	5.0	3.9	2.7	2.3	1.7	1.4	1.3	586.1	-33.	1226.
		2	10.2	8.4	7.6	6.0	4.8	3.3	2.6	2.1	1.6	1.1	282.6	0.	1774.
		3	9.0	7.3	6.4	5.7	4.4	3.2	2.5	1.9	1.5	1.2	156.5	14.	1960.
		4	9.1	7.4	6.7	6.1	4.9	3.7	3.0	2.4	1.8	1.4	211.7	-49.	4430.
		5	25.7	20.3	17.6	15.7	11.5	8.0	6.2	4.8	3.4	3.0	61.3	43.	1923.
1100	2	1	5.7	4.3	3.7	3.4	2.7	1.9	1.7	1.2	1.0	.8	460.1	-7.	963.
		2	8.3	6.5	5.6	5.1	3.9	2.7	2.2	1.6	1.2	1.0	234.1	0.	1470.
		3	7.2	5.9	5.5	5.0	4.1	3.0	2.5	2.0	1.6	1.3	294.8	-35.	3690.
		4	23.7	18.7	15.3	14.0	10.0	7.0	5.5	4.1	3.0	2.2	85.9	52.	1798.
		5	23.2	18.9	16.4	15.0	11.7	8.6	6.9	5.3	4.0	3.2	104.1	-31.	3260.
1075	2	1	4.9	3.8	3.2	2.9	2.3	1.7	1.4	1.1	.8	.7	600.9	-1.	857.
		2	5.9	5.0	4.3	4.1	3.2	2.4	2.0	1.6	1.2	1.0	624.9	-45.	2675.
		3	21.2	16.5	14.1	12.5	9.3	6.5	5.1	3.8	2.8	2.2	184.0	66.	1570.
		4	22.0	18.0	15.6	14.2	11.0	8.1	6.4	5.0	3.9	2.7	202.9	-21.	2890.
		5	27.2	22.6	19.8	17.6	14.4	10.3	8.7	6.7	5.4	5.6	181.6	6.	3880.
1050	2	1	2.6	2.3	2.0	1.8	1.5	1.3	1.1	.9	.7	.5	691.7	-54.	1551.
		2	18.5	14.5	12.3	10.8	8.1	5.7	4.4	3.4	2.5	1.9	199.1	55.	1339.
		3	19.5	16.0	13.9	12.4	9.7	7.0	5.6	4.6	3.8	3.2	183.3	-8.	2460.
		4	26.1	21.8	19.4	17.3	13.8	10.4	8.5	6.3	4.4	3.4	156.6	19.	3510.
		5	26.9	23.1	20.4	18.1	14.8	10.2	9.9	6.5	5.6	4.7	87.9	-35.	2956.
1025	2	1	14.4	11.4	9.4	8.5	6.4	4.6	3.6	2.8	2.1	1.7	448.0	44.	879.
		2	19.5	16.1	13.8	12.5	9.7	7.1	5.6	4.4	3.4	2.7	307.1	-24.	1808.
		3	25.0	20.9	18.1	16.5	12.9	9.6	7.7	6.2	4.9	3.9	253.7	38.	2980.
		4	26.5	22.3	19.5	18.0	14.2	10.7	8.7	6.5	4.8	4.0	130.1	-26.	2550.
		5	25.1	21.5	18.8	17.4	13.9	10.6	8.7	7.0	5.4	4.5	85.7	3.	2522.
1000	2	1	17.1	12.8	11.2	10.5	7.7	6.1	4.5	3.4	2.9	2.3	589.0	-45.	1155.
		2	25.3	20.3	17.7	16.0	12.4	9.4	7.2	5.7	4.5	3.7	387.6	42.	2281.
		3	29.4	24.2	21.6	19.5	15.4	11.5	9.4	7.4	5.8	4.7	166.5	-12.	1950.
		4	26.9	22.1	20.0	18.1	14.5	10.8	8.6	6.9	5.2	4.4	101.3	17.	1980.
		5	31.6	25.7	23.1	20.6	16.2	12.0	9.7	7.6	6.2	4.8	49.6	-5.	1459.
975	2	1	16.5	13.7	10.7	10.5	8.6	6.2	5.0	4.0	3.0	2.6	1666.0	7.	3730.
		2	27.5	23.8	25.0	20.1	13.6	11.4	9.1	7.0	5.4	3.9	433.2	-19.	2914.
		3	23.6	20.3	18.0	16.8	13.3	10.2	8.3	6.6	5.2	4.2	219.3	27.	2940.
		4	28.8	23.9	20.7	19.0	14.6	10.8	8.7	7.0	5.4	4.8	88.2	0.	1978.
950	2	1	20.2	16.6	14.4	13.4	10.6	8.0	6.4	5.1	3.9	3.1	1173.0	-32.	3060.
		2	24.5	21.8	17.1	16.6	13.3	10.5	8.4	6.8	5.0	4.3	427.1	15.	3352.
		3	25.8	22.1	22.6	17.7	15.8	11.3	9.4	7.8	5.9	5.0	130.1	18.	2030.
925	2	1	20.9	17.5	15.5	14.2	11.4	8.7	7.2	5.8	4.5	3.7	1102.0	-3.	3460.
		2	34.9	29.0	25.4	23.1	18.1	13.5	10.9	8.5	6.6	5.4	221.5	17.	2086.

900	2	1	23.4	19.6	16.9	15.4	12.3	9.2	7.4	5.9	4.5	3.7	574.6	14.	2000.

IPR-11 SPECTRAL ANALYSIS SUMMARY

LINE NO. : 1400

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
900	1	498.0	1202.9	5.4	199.52	30.00	.10	-2000.00	-2000.000	1.28	-2000.00
925	1	1236.0	3234.2	9.1	168.68	10.00	.20	-2000.00	-2000.000	1.11	-2000.00
	2	206.5	1621.0	7.8	282.00	.30	.10	-2000.00	-2000.000	3.21	-2000.00
950	1	2109.0	4138.9	8.3	160.70	30.00	.20	-2000.00	-2000.000	1.32	-2000.00
	2	819.6	4825.4	8.1	303.37	.03	.10	-2000.00	-2000.000	.74	-2000.00
	3	200.3	2353.5	6.7	153.97	.03	.20	-2000.00	-2000.000	6.39	-2000.00
975	1	942.7	2466.7	8.3	155.10	10.00	.20	-2000.00	-2000.000	1.04	-2000.00
	2	467.6	3670.7	9.3	172.52	10.00	.20	-2000.00	-2000.000	1.13	-2000.00
	3	287.7	4507.3	6.9	262.70	.03	.10	-2000.00	-2000.000	.97	-2000.00
	4	83.2	2178.1	6.6	51.31	.30	.50	-2000.00	-2000.000	14.17	-2000.00
1000	1	1096.0	2458.2	8.9	166.02	10.00	.20	-2000.00	-2000.000	1.69	-2000.00
	2	327.9	2206.3	10.8	197.96	10.00	.20	-2000.00	-2000.000	1.18	-2000.00
	3	237.7	3192.0	7.7	270.51	100.00	.10	-2000.00	-2000.000	1.24	-2000.00
	4	169.0	3790.4	5.3	217.46	.01	.10	-2000.00	-2000.000	1.96	-2000.00
	5	55.8	1876.6	4.9	205.91	.01	.10	-2000.00	-2000.000	4.64	-2000.00
1025	1	581.2	1403.8	4.6	74.28	.10	.30	-2000.00	-2000.000	2.19	-2000.00
	2	206.6	1497.1	9.2	330.89	.10	.10	-2000.00	-2000.000	.96	-2000.00
	3	88.2	1276.1	10.9	362.32	100.00	.10	-2000.00	-2000.000	1.05	-2000.00
	4	80.2	1937.4	7.1	141.63	.30	.20	-2000.00	-2000.000	1.50	-2000.00
	5	65.6	2376.4	3.6	29.33	.30	.80	-2000.00	-2000.000	34.63	-2000.00
1050	1	388.0	1218.3	4.4	84.06	.03	.30	-2000.00	-2000.000	2.19	-2000.00
	2	180.3	1698.4	5.8	154.80	.01	.20	-2000.00	-2000.000	3.19	-2000.00
	3	101.6	1910.1	8.3	300.08	.10	.10	-2000.00	-2000.000	1.33	-2000.00
	4	49.0	1540.2	9.7	328.91	30.00	.10	-2000.00	-2000.000	1.11	-2000.00
	5	48.3	2273.0	6.2	124.42	10.00	.20	-2000.00	-2000.000	17.72	-2000.00
1075	1	1717.0	3171.4	2.1	49.25	.03	.20	-2000.00	-2000.000	2.36	-2000.00
	2	176.8	979.7	4.0	96.47	.01	.30	-2000.00	-2000.000	1.46	-2000.00
	3	129.6	1433.2	6.4	241.01	.01	.10	-2000.00	-2000.000	5.03	-2000.00
	4	85.8	1584.6	6.7	114.08	.10	.30	-2000.00	-2000.000	5.67	-2000.00
	5	44.6	1236.2	9.0	310.42	1.00	.10	-2000.00	-2000.000	5.16	-2000.00
1100	1	1244.0	2790.1	2.2	35.04	.10	.30	-2000.00	-2000.000	4.08	-2000.00
	2	332.6	2237.9	2.8	53.89	1.00	.20	-2000.00	-2000.000	9.37	-2000.00
	3	51.0	684.7	3.8	64.71	.10	.30	-2000.00	-2000.000	7.77	-2000.00
	4	51.5	1154.8	6.5	240.88	.10	.10	-2000.00	-2000.000	3.21	-2000.00
	5	40.4	1357.8	7.4	139.31	10.00	.20	-2000.00	-2000.000	6.90	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
1125	1	624.8	1509.1	3.1	73.99	.03	.20	-2000.00	-2000.000	2.97	-2000.00
	2	389.2	2820.2	2.9	68.23	.03	.20	-2000.00	-2000.000	2.19	-2000.00
	3	143.6	2076.7	3.3	123.74	1.00	.10	-2000.00	-2000.000	3.98	-2000.00
	4	29.1	702.2	3.5	31.31	.30	.80	-2000.00	-2000.000	9.47	-2000.00
	5	32.0	1157.9	6.8	158.16	.03	.20	-2000.00	-2000.000	2.36	-2000.00
1150	1	338.3	817.1	2.8	73.42	.01	.20	-2000.00	-2000.000	2.09	-2000.00
	2	305.5	2213.7	4.1	107.37	.01	.20	-2000.00	-2000.000	1.30	-2000.00
	3	245.6	3551.8	3.8	89.32	.03	.20	-2000.00	-2000.000	1.97	-2000.00
	4	95.3	2300.7	3.3	54.15	.10	.30	-2000.00	-2000.000	2.01	-2000.00
	5	24.9	901.8	5.3	195.35	1.00	.10	-2000.00	-2000.000	7.64	-2000.00
1175	1	675.5	731.0	3.0	131.60	.01	.10	-2000.00	-2000.000	4.22	-2000.00
	2	314.9	1022.0	4.3	103.66	.03	.20	-2000.00	-2000.000	2.77	-2000.00
	3	394.9	2560.0	5.3	110.40	.10	.20	-2000.00	-2000.000	1.75	-2000.00
	4	346.1	3740.0	4.7	110.62	.03	.20	-2000.00	-2000.000	1.40	-2000.00
	5	141.8	2300.0	4.1	106.21	.01	.20	-2000.00	-2000.000	1.41	-2000.00
1200	1	566.6	1186.0	3.4	138.63	.03	.10	-2000.00	-2000.000	2.30	-2000.00
	2	151.7	952.0	3.6	73.13	.03	.40	-2000.00	-2000.000	3.92	-2000.00
	3	89.9	1126.0	7.1	103.49	30.00	.30	-2000.00	-2000.000	5.12	-2000.00
	4	127.8	2670.0	5.7	120.88	.10	.20	-2000.00	-2000.000	1.09	-2000.00
	5	119.0	3730.0	5.2	121.17	.03	.20	-2000.00	-2000.000	1.97	-2000.00
1225	1	1195.0	2500.0	3.3	136.97	.01	.10	-2000.00	-2000.000	2.16	-2000.00
	2	179.8	1129.0	4.3	67.94	.10	.30	-2000.00	-2000.000	1.44	-2000.00
	3	77.4	970.0	5.3	113.43	.10	.20	-2000.00	-2000.000	2.67	-2000.00
	4	53.9	1128.0	5.6	130.01	.03	.20	-2000.00	-2000.000	2.56	-2000.00
	5	84.6	2657.0	6.4	135.12	.10	.20	-2000.00	-2000.000	1.65	-2000.00
1250	1	955.6	2308.0	3.5	82.19	.03	.20	-2000.00	-2000.000	2.85	-2000.00
	2	212.5	1539.0	6.0	156.06	.01	.20	-2000.00	-2000.000	1.06	-2000.00
	3	64.4	931.0	6.4	229.44	.10	.10	-2000.00	-2000.000	3.58	-2000.00
	4	35.6	860.0	5.3	112.52	.03	.30	-2000.00	-2000.000	3.67	-2000.00
	5	27.4	990.0	6.8	148.48	.10	.20	-2000.00	-2000.000	2.13	-2000.00
1275	1	1164.0	3040.0	6.1	245.12	.01	.10	-2000.00	-2000.000	1.98	-2000.00
	2	220.4	1730.0	5.9	137.19	.03	.20	-2000.00	-2000.000	1.50	-2000.00
	3	79.9	1252.0	8.3	174.04	.10	.20	-2000.00	-2000.000	1.21	-2000.00
	4	31.7	830.0	8.8	338.31	.01	.10	-2000.00	-2000.000	1.34	-2000.00
	5	20.0	786.0	8.9	318.57	.30	.10	-2000.00	-2000.000	1.87	-2000.00
1300	1	469.5	1228.0	20.0	339.45	30.00	.20	-2000.00	-2000.000	1.19	-2000.00
	2	112.6	883.0	20.2	565.16	100.00	.10	-2000.00	-2000.000	.60	-2000.00
	3	53.9	843.0	16.3	489.48	100.00	.10	-2000.00	-2000.000	1.18	-2000.00
	4	28.5	746.0	15.5	495.50	.30	.10	-2000.00	-2000.000	.43	-2000.00
	5	14.5	569.0	14.3	458.87	1.00	.10	-2000.00	-2000.000	1.12	-2000.00
1325	1	739.9	1936.0	21.7	375.76	100.00	.20	-2000.00	-2000.000	1.00	-2000.00
	2	153.2	1202.0	23.2	380.27	30.00	.20	-2000.00	-2000.000	1.04	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
	3	56.8	889.0	18.2	528.26	30.00	.10	-2000.00	-2000.000	.74	-2000.00
	4	32.4	848.0	14.9	457.85	100.00	.10	-2000.00	-2000.000	1.06	-2000.00
	5	18.8	736.0	14.1	457.44	.30	.10	-2000.00	-2000.000	.87	-2000.00
1350	1	693.2	1451.0	20.1	238.04	10.00	.30	-2000.00	-2000.000	1.33	-2000.00
	2	274.2	1721.0	22.4	367.91	30.00	.20	-2000.00	-2000.000	.85	-2000.00
	3	90.3	1131.0	19.6	334.46	30.00	.20	-2000.00	-2000.000	1.43	-2000.00
	4	40.6	850.0	14.7	522.21	.01	.10	-2000.00	-2000.000	.90	-2000.00
	5	26.3	825.0	12.5	412.85	1.00	.10	-2000.00	-2000.000	1.25	-2000.00
1375	1	613.7	1605.0	11.0	206.90	30.00	.20	-2000.00	-2000.000	1.24	-2000.00
	2	135.7	1065.0	17.4	316.05	100.00	.20	-2000.00	-2000.000	1.30	-2000.00
	3	80.3	1258.0	17.7	299.40	10.00	.20	-2000.00	-2000.000	.75	-2000.00
	4	34.1	891.0	15.3	271.80	10.00	.20	-2000.00	-2000.000	3.21	-2000.00
	5	17.5	687.0	12.4	424.08	.10	.10	-2000.00	-2000.000	1.04	-2000.00
1400	1	542.5	1064.0	5.8	111.75	10.00	.20	-2000.00	-2000.000	1.48	-2000.00
	2	142.7	840.0	14.4	253.02	10.00	.20	-2000.00	-2000.000	.80	-2000.00
	3	59.9	704.0	15.1	286.29	100.00	.20	-2000.00	-2000.000	1.26	-2000.00
	4	43.2	848.0	16.2	277.61	10.00	.20	-2000.00	-2000.000	1.35	-2000.00
	5	21.9	644.0	12.8	415.42	1.00	.10	-2000.00	-2000.000	1.42	-2000.00
1425	1	895.4	1757.0	5.4	209.96	.03	.10	-2000.00	-2000.000	1.35	-2000.00
	2	223.6	1316.0	6.1	223.62	100.00	.10	-2000.00	-2000.000	.76	-2000.00
	3	72.3	849.0	14.0	254.37	30.00	.20	-2000.00	-2000.000	1.10	-2000.00
	4	34.1	669.0	14.5	253.51	10.00	.20	-2000.00	-2000.000	1.18	-2000.00
	5	25.7	757.0	13.9	243.77	3.00	.20	-2000.00	-2000.000	1.18	-2000.00

IPR-11 DATA SUMMARY

SURVEY : MINNOVA - MT. SICKER PROPERTY

INDEX FILE : L-1400W.IND
DATA FILE : L-1400W.DAT

LINE NO. = 1400

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1425	2	1	20.6	17.4	15.2	13.7	11.0	8.3	6.8	5.4	4.2	3.4	895.4	-10.	1757.
		2	21.6	18.6	16.6	15.1	12.3	9.3	7.8	6.1	4.8	3.9	223.6	-20.	1316.
		3	47.0	40.5	36.4	33.4	27.5	20.9	17.5	14.0	11.0	9.2	72.3	4.	849.
		4	49.0	42.4	38.7	35.3	28.0	22.1	18.5	14.5	11.3	9.2	34.1	-30.	669.
		5	48.9	41.5	37.7	34.4	27.8	21.2	17.9	13.9	10.8	9.0	25.7	56.	757.
1400	2	1	20.0	17.1	15.3	13.9	11.3	8.7	7.2	5.8	4.6	3.8	542.5	-18.	1064.
		2	49.2	42.5	38.2	34.9	28.4	21.8	18.0	14.4	11.3	9.4	142.7	-2.	840.
		3	49.7	43.1	38.8	35.5	29.1	22.7	18.8	15.1	12.2	10.0	59.9	-23.	704.
		4	54.7	47.0	42.3	38.7	31.7	24.3	20.1	16.2	12.5	10.7	43.2	69.	848.
		5	47.8	40.1	35.8	32.3	26.0	19.5	15.9	12.8	9.8	8.3	21.9	-5.	644.
1375	2	1	37.0	31.4	28.4	26.1	21.3	16.5	13.7	11.0	8.8	7.2	613.7	-12.	1605.
		2	55.1	47.5	43.2	39.9	32.8	25.7	21.5	17.4	13.9	11.6	135.7	-31.	1065.
		3	59.9	51.4	46.4	42.8	34.8	26.8	22.2	17.7	14.0	11.3	80.3	75.	1258.
		4	55.5	46.9	41.8	38.4	30.5	23.1	18.9	15.3	12.2	10.7	34.1	3.	891.
		5	47.2	39.5	35.1	32.3	25.5	19.2	15.6	12.4	9.7	7.9	17.5	-11.	687.
1350	2	1	62.5	54.3	49.4	45.6	37.6	29.6	24.8	20.1	16.1	13.4	693.2	-46.	1451.
		2	73.4	63.6	57.6	52.9	43.1	33.4	27.5	22.4	17.6	14.7	274.2	63.	1721.
		3	66.2	56.7	50.9	46.7	37.9	29.3	24.3	19.6	15.6	13.0	90.3	13.	1131.
		4	56.6	48.0	42.8	39.1	31.1	23.1	18.7	14.7	11.3	9.4	40.6	0.	850.
		5	46.8	39.7	35.2	32.1	25.8	19.3	15.9	12.5	10.0	8.2	26.3	-13.	825.
1325	2	1	70.3	60.6	54.9	50.5	41.4	32.2	26.9	21.7	17.3	14.4	739.9	49.	1936.
		2	77.9	66.9	60.5	55.4	45.1	34.9	28.8	23.2	18.3	15.2	153.2	1.	1202.
		3	65.9	55.9	50.4	45.7	36.7	28.0	22.9	18.2	14.2	11.8	56.8	12.	889.
		4	53.6	45.3	41.2	37.1	29.7	22.7	18.6	14.9	11.7	9.7	32.4	1.	848.
		5	52.3	44.0	40.1	35.8	28.7	22.1	18.0	14.1	10.8	8.9	18.8	-2.	736.
1300	2	1	67.3	58.2	52.0	47.8	38.9	30.0	24.8	20.0	15.8	13.1	469.5	-11.	1228.

		2	71.7	61.9	55.3	50.6	40.6	30.9	25.3	20.2	15.8	13.1	112.6	3.	883.
		3	57.7	50.0	44.6	40.7	32.6	24.9	20.5	16.3	12.9	10.8	53.9	5.	843.
		4	57.1	49.4	44.3	40.1	31.8	24.3	19.7	15.5	12.1	9.9	28.5	10.	746.
		5	52.8	46.0	41.3	37.0	29.4	22.3	18.0	14.3	11.2	9.4	14.5	-9.	569.
1275	2	1	24.5	20.0	17.7	16.1	12.6	9.5	7.7	6.1	4.8	3.9	1164.0	-11.	3040.
		2	24.4	20.0	17.8	16.3	12.6	9.3	7.6	5.9	4.6	3.7	220.4	-3.	1730.
		3	33.2	27.6	24.6	22.4	17.6	13.2	10.7	8.3	6.5	5.3	79.9	19.	1252.
		4	34.7	28.7	25.5	23.3	18.3	13.8	11.2	8.8	6.8	5.5	31.7	0.	830.
		5	34.7	28.3	25.3	23.5	18.4	14.0	11.4	8.9	7.0	5.9	20.0	-30.	786.
1250	2	1	15.0	11.8	10.5	9.3	7.3	5.5	4.4	3.5	2.7	2.2	955.6	-12.	2308.
		2	26.1	21.4	19.0	17.1	13.3	9.7	7.8	6.0	4.6	3.7	212.5	9.	1539.
		3	24.1	19.5	17.3	15.5	12.1	9.0	7.5	6.4	4.8	3.9	64.4	11.	931.
		4	26.9	21.9	19.5	17.4	13.9	10.2	7.8	5.3	4.2	3.5	35.6	-17.	860.
		5	28.7	23.7	20.9	18.9	14.9	11.1	9.2	6.8	5.4	4.5	27.4	-8.	990.
1225	2	1	13.1	10.9	9.5	8.5	6.8	5.1	4.1	3.3	2.5	2.1	1195.0	-3.	2500.
		2	18.4	15.2	13.3	11.9	9.4	6.9	5.6	4.3	3.2	2.5	179.8	0.	1129.
		3	21.7	17.9	15.8	14.2	11.2	8.2	6.6	5.3	4.3	3.3	77.4	-4.	970.
		4	23.5	19.3	16.9	15.1	11.9	8.8	7.3	5.6	4.1	3.6	53.9	2.	1128.
		5	26.0	21.7	19.0	17.1	13.5	10.0	8.1	6.4	4.9	4.0	84.6	33.	2657.
1200	2	1	13.6	11.1	9.7	8.8	7.0	5.3	4.3	3.4	2.7	2.2	566.6	0.	1186.
		2	19.9	16.3	14.2	12.7	9.7	6.8	5.1	3.6	2.4	2.1	151.7	-41.	952.
		3	22.7	18.9	16.9	15.4	12.5	9.8	8.4	7.1	6.1	4.8	89.9	36.	1126.
		4	22.9	19.0	16.8	15.3	12.1	9.0	7.3	5.7	4.4	3.5	127.8	44.	2670.
		5	21.7	17.9	15.6	14.1	11.1	8.1	6.6	5.2	4.0	3.3	119.0	-6.	3730.
1175	2	1	13.0	10.5	9.2	8.2	6.4	4.8	3.9	3.0	2.4	2.1	675.5	-24.	731.
		2	19.0	15.4	13.5	12.1	9.5	6.9	5.5	4.3	3.4	2.8	314.9	-3.	1022.
		3	20.9	17.3	15.2	13.6	10.9	8.1	6.7	5.3	4.0	3.2	394.9	53.	2560.
		4	19.9	16.4	14.4	12.9	10.2	7.5	6.1	4.7	3.6	2.9	346.1	4.	3740.
		5	17.3	14.3	12.6	11.3	9.0	6.7	5.3	4.1	3.0	2.5	141.8	31.	2300.
1150	2	1	12.3	10.0	8.6	7.6	6.1	4.5	3.6	2.8	2.1	1.7	338.3	-14.	817.
		2	17.8	14.8	12.9	11.5	9.0	6.6	5.3	4.1	3.1	2.5	305.5	57.	2214.
		3	15.8	13.1	11.3	10.1	8.1	6.0	4.9	3.8	2.9	2.4	245.6	5.	3552.
		4	14.8	12.5	10.7	9.8	7.6	5.4	4.3	3.3	2.5	2.0	95.3	42.	2301.
		5	22.9	14.9	14.1	13.3	10.9	7.7	6.5	5.3	4.1	3.6	24.9	-62.	902.
1125	2	1	13.4	10.9	9.5	8.4	6.6	4.9	4.1	3.1	2.3	2.0	624.8	48.	1509.
		2	12.2	10.0	8.7	7.7	6.1	4.5	3.7	2.9	2.2	1.8	389.2	-5.	2820.
		3	12.4	10.4	9.1	8.0	6.5	4.7	3.8	3.3	2.6	2.1	143.6	50.	2077.
		4	22.2	18.3	16.1	14.9	10.9	7.7	6.3	3.5	2.0	1.5	29.1	-52.	702.
		5	28.5	23.5	20.6	18.9	14.6	10.7	9.1	6.8	5.1	4.4	32.0	-29.	1158.
1100	2	1	9.6	8.3	7.2	5.8	4.7	3.4	2.8	2.2	1.6	1.3	1244.0	-13.	2790.
		2	11.8	8.1	6.1	7.4	5.8	4.3	3.5	2.8	2.1	1.7	332.6	50.	2238.
		3	19.3	14.6	11.0	11.9	9.9	6.5	5.0	3.8	2.9	2.6	51.0	-45.	685.

		4	25.4	20.4	17.1	16.8	13.6	9.9	8.0	6.5	5.0	4.1	51.5	-9.	1155.
		5	27.9	20.9	16.5	18.7	15.5	11.3	9.2	7.4	5.7	4.7	40.4	-5.	1358.
1075	2	1	8.6	7.2	6.1	5.6	4.3	3.3	2.6	2.1	1.6	1.3	1717.0	24.	3171.
		2	19.4	15.9	13.6	12.2	9.3	6.8	5.3	4.0	2.9	2.3	176.8	-58.	980.
		3	23.4	19.6	17.3	15.5	11.8	9.2	7.4	6.4	5.2	3.6	129.6	2.	1433.
		4	30.6	25.6	22.4	20.5	16.9	12.0	9.8	6.7	4.9	4.8	85.8	5.	1585.
		5	32.7	29.0	24.7	23.1	18.4	14.7	10.2	9.0	6.5	6.2	44.6	-50.	1236.
1050	2	1	20.4	16.1	14.3	12.8	9.7	7.2	5.6	4.4	3.3	2.5	388.0	-55.	1218.
		2	26.7	21.7	19.1	17.1	13.2	9.6	7.5	5.8	4.4	3.8	180.3	-7.	1698.
		3	31.5	26.0	23.4	21.4	16.9	12.8	10.3	8.3	6.5	5.2	101.6	15.	1910.
		4	35.5	29.7	26.9	24.6	19.6	15.0	12.1	9.7	7.7	6.3	49.0	-33.	1540.
		5	23.8	17.9	15.5	19.3	16.5	6.2	9.0	6.2	4.9	4.7	48.3	-7.	2273.
1025	2	1	20.8	16.9	14.7	13.2	10.2	7.5	5.9	4.6	3.5	2.8	581.2	-23.	1404.
		2	35.0	29.5	26.1	23.8	18.9	14.3	11.7	9.2	7.2	5.9	206.6	5.	1497.
		3	39.0	33.3	29.7	27.2	21.8	16.6	13.7	10.9	8.7	7.1	88.2	-22.	1276.
		4	27.3	23.1	20.6	19.0	14.9	11.1	9.5	7.1	5.5	4.5	80.2	6.	1937.
		5	20.7	17.6	15.1	14.3	10.1	9.5	3.1	3.6	3.3	.5	65.6	23.	2376.
1000	2	1	31.3	26.4	23.6	21.4	17.5	13.4	11.1	8.9	7.0	5.8	1096.0	-8.	2458.
		2	37.6	32.3	29.0	26.5	21.4	16.4	13.5	10.8	8.5	7.0	327.9	-38.	2206.
		3	27.0	23.0	20.6	18.7	15.2	11.7	9.6	7.7	6.0	5.0	237.7	20.	3192.
		4	21.2	17.6	15.6	14.1	11.1	8.4	6.8	5.3	4.1	3.5	169.0	32.	3790.
		5	21.3	16.8	14.4	12.4	11.0	7.9	6.3	4.9	3.9	3.3	55.8	-45.	1877.
975	2	1	28.4	24.3	21.9	20.0	16.2	12.5	10.3	8.3	6.5	5.4	942.7	-49.	2467.
		2	31.7	27.2	24.5	22.4	18.2	14.1	11.6	9.3	7.4	6.1	467.6	14.	3671.
		3	25.8	21.7	19.5	17.8	14.3	10.8	8.8	6.9	5.4	4.3	287.7	36.	4507.
		4	27.7	19.4	14.8	17.3	14.8	10.0	7.0	6.6	3.0	3.1	83.2	-42.	2178.
950	2	1	27.8	24.1	21.4	19.7	16.0	12.4	10.2	8.3	6.5	5.4	2109.0	-17.	4139.
		2	30.7	26.1	23.0	21.0	16.7	12.6	10.2	8.1	6.3	5.1	819.6	26.	4825.
		3	31.4	22.9	19.3	17.3	13.6	10.3	8.4	6.7	5.2	4.3	200.3	-28.	2354.
925	2	1	31.2	26.3	24.0	22.1	17.8	13.7	11.3	9.1	7.2	5.9	1236.0	14.	3234.
		2	31.4	24.5	21.9	19.8	15.8	12.0	9.8	7.8	6.2	5.1	206.5	-29.	1621.
900	2	1	19.8	16.6	14.8	13.6	10.8	8.3	6.8	5.4	4.3	3.5	498.0	-29.	1203.

IPR-11 SPECTRAL ANALYSIS SUMMARY

LINE NO. : 1500

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
900	1	859.3	2075.0	3.7	139.20	100.00	.10	-2000.00	-2000.000	2.39	-2000.00
925	1	831.2	1739.0	3.6	73.72	30.00	.20	-2000.00	-2000.000	2.15	-2000.00
	2	269.1	1689.0	4.7	109.91	.03	.20	-2000.00	-2000.000	2.19	-2000.00
950	1	1482.0	2900.0	4.9	95.15	10.00	.20	-2000.00	-2000.000	2.00	-2000.00
	2	429.0	2525.0	7.0	248.25	30.00	.10	-2000.00	-2000.000	1.50	-2000.00
	3	179.3	2100.0	7.0	273.84	.01	.10	-2000.00	-2000.000	2.06	-2000.00
975	1	1924.0	3170.0	4.4	166.80	100.00	.10	-2000.00	-2000.000	1.73	-2000.00
	2	615.5	3051.0	5.7	121.38	.10	.20	-2000.00	-2000.000	.89	-2000.00
	3	280.8	2770.0	6.5	248.81	.03	.10	-2000.00	-2000.000	.74	-2000.00
	4	133.9	2210.0	5.6	136.73	.03	.20	-2000.00	-2000.000	13.12	-2000.00
1000	1	989.8	2589.0	4.6	89.82	10.00	.20	-2000.00	-2000.000	2.09	-2000.00
	2	306.5	2406.0	3.0	125.85	.01	.10	-2000.00	-2000.000	2.02	-2000.00
	3	163.4	2550.0	4.7	182.20	.10	.10	-2000.00	-2000.000	1.33	-2000.00
	4	93.1	2435.0	6.2	242.58	.01	.10	-2000.00	-2000.000	1.88	-2000.00
	5	48.8	1917.0	5.4	126.17	.10	.20	-2000.00	-2000.000	5.60	-2000.00
1025	1	1088.0	1890.0	.8	20.20	100.00	.30	-2000.00	-2000.000	23.53	-2000.00
	2	461.2	2413.0	5.7	217.68	.10	.10	-2000.00	-2000.000	1.07	-2000.00
	3	200.7	2090.0	3.1	71.84	.03	.20	-2000.00	-2000.000	1.74	-2000.00
	4	129.4	2250.0	4.7	191.66	.01	.10	-2000.00	-2000.000	2.81	-2000.00
	5	84.2	2202.0	6.2	135.44	.10	.20	-2000.00	-2000.000	2.53	-2000.00
1050	1	1814.0	3350.0	2.5	58.63	.03	.20	-2000.00	-2000.000	2.24	-2000.00
	2	418.9	2321.0	2.2	59.86	.01	.20	-2000.00	-2000.000	3.42	-2000.00
	3	228.6	2520.0	6.1	128.66	.10	.20	-2000.00	-2000.000	.79	-2000.00
	4	113.0	2080.0	4.2	87.82	30.00	.20	-2000.00	-2000.000	3.11	-2000.00
	5	79.6	2205.0	5.4	112.94	.10	.20	-2000.00	-2000.000	1.35	-2000.00
1075	1	849.5	2051.0	4.1	95.97	.03	.20	-2000.00	-2000.000	2.49	-2000.00
	2	450.7	3265.0	4.5	119.56	.01	.20	-2000.00	-2000.000	1.60	-2000.00
	3	147.2	2120.0	4.0	106.32	.01	.20	-2000.00	-2000.000	1.80	-2000.00
	4	91.1	2199.0	7.9	289.95	.10	.10	-2000.00	-2000.000	.91	-2000.00
	5	50.6	1832.0	4.3	100.79	.03	.20	-2000.00	-2000.000	2.31	-2000.00
1100	1	560.7	1354.0	3.0	70.75	.03	.20	-2000.00	-2000.000	2.38	-2000.00
	2	213.0	1543.0	4.9	114.00	.03	.20	-2000.00	-2000.000	1.43	-2000.00
	3	155.8	2250.0	4.7	109.78	.03	.20	-2000.00	-2000.000	1.44	-2000.00
	4	69.3	1674.0	4.9	103.73	.10	.20	-2000.00	-2000.000	1.86	-2000.00
	5	49.2	1781.0	8.2	298.13	.10	.10	-2000.00	-2000.000	.97	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
1125	1	716.4	1405.0	3.0	121.33	.03	.10	-2000.00	-2000.000	2.05	-2000.00
	2	282.1	1660.0	5.0	117.13	.03	.20	-2000.00	-2000.000	1.27	-2000.00
	3	141.4	1660.0	5.8	134.20	.03	.20	-2000.00	-2000.000	1.48	-2000.00
	4	119.9	2350.0	5.2	121.15	.03	.20	-2000.00	-2000.000	1.15	-2000.00
	5	61.9	1823.0	5.2	133.83	.01	.20	-2000.00	-2000.000	1.48	-2000.00
1150	1	390.4	766.0	3.1	118.92	30.00	.10	-2000.00	-2000.000	2.77	-2000.00
	2	243.0	1430.0	3.6	77.96	.10	.20	-2000.00	-2000.000	2.48	-2000.00
	3	125.3	1470.0	5.1	132.70	.01	.20	-2000.00	-2000.000	1.40	-2000.00
	4	74.0	1452.0	6.2	130.16	.10	.20	-2000.00	-2000.000	1.93	-2000.00
	5	73.4	2160.0	5.5	126.63	.03	.20	-2000.00	-2000.000	1.68	-2000.00
1175	1	1190.0	2190.0	3.8	156.43	.01	.10	-2000.00	-2000.000	1.69	-2000.00
	2	155.2	859.0	6.1	159.23	.01	.20	-2000.00	-2000.000	1.34	-2000.00
	3	138.5	1530.0	5.4	104.94	30.00	.20	-2000.00	-2000.000	4.74	-2000.00
	4	82.1	1517.0	4.6	43.32	.30	.60	-2000.00	-2000.000	4.32	-2000.00
	5	52.5	1455.0	7.0	158.82	.03	.20	-2000.00	-2000.000	2.52	-2000.00
1200	1	357.8	936.0	3.0	124.06	.01	.10	-2000.00	-2000.000	2.59	-2000.00
	2	123.4	968.0	5.7	210.47	30.00	.10	-2000.00	-2000.000	2.13	-2000.00
	3	34.8	545.0	5.9	155.28	.01	.20	-2000.00	-2000.000	2.23	-2000.00
	4	45.2	1183.0	6.1	65.19	.30	.40	-2000.00	-2000.000	2.16	-2000.00
	5	30.8	1207.0	7.6	157.99	.10	.20	-2000.00	-2000.000	1.38	-2000.00
1225	1	384.4	928.0	4.5	177.15	.03	.10	-2000.00	-2000.000	2.10	-2000.00
	2	150.4	1089.0	6.3	134.29	.10	.20	-2000.00	-2000.000	1.58	-2000.00
	3	67.6	977.0	7.9	291.60	.10	.10	-2000.00	-2000.000	1.07	-2000.00
	4	22.3	538.0	9.4	182.48	30.00	.20	-2000.00	-2000.000	2.61	-2000.00
	5	31.5	1139.0	7.2	113.41	.10	.30	-2000.00	-2000.000	1.02	-2000.00
1250	1	726.1	759.0	6.4	229.43	30.00	.10	-2000.00	-2000.000	1.57	-2000.00
	2	392.7	1233.0	9.0	313.06	1.00	.10	-2000.00	-2000.000	1.21	-2000.00
	3	199.0	1240.0	9.6	362.33	.01	.10	-2000.00	-2000.000	.77	-2000.00
	4	101.1	1050.0	11.2	367.24	30.00	.10	-2000.00	-2000.000	1.15	-2000.00
	5	36.3	570.0	10.6	402.61	.01	.10	-2000.00	-2000.000	1.48	-2000.00
1275	1	206.1	647.0	8.4	155.77	10.00	.20	-2000.00	-2000.000	1.51	-2000.00
	2	92.5	871.4	12.3	393.86	30.00	.10	-2000.00	-2000.000	.78	-2000.00
	3	74.1	1392.0	12.5	402.76	3.00	.10	-2000.00	-2000.000	.71	-2000.00
	4	33.4	1049.0	8.9	362.56	.10	.10	-2000.00	-2000.000	7.30	-2000.00
	5	25.8	1215.0	17.1	139.04	3.00	.40	-2000.00	-2000.000	4.67	-2000.00
1300	1	749.4	1307.0	7.2	150.18	.10	.20	-2000.00	-2000.000	2.08	-2000.00
	2	191.0	999.0	11.7	210.40	10.00	.20	-2000.00	-2000.000	1.08	-2000.00
	3	109.6	1140.0	13.6	241.78	10.00	.20	-2000.00	-2000.000	1.27	-2000.00
	4	90.5	1578.0	13.4	421.97	100.00	.10	-2000.00	-2000.000	.94	-2000.00
	5	52.2	1365.0	12.8	406.61	30.00	.10	-2000.00	-2000.000	.79	-2000.00
1325	1	327.7	734.0	2.2	46.40	.10	.20	-2000.00	-2000.000	3.98	-2000.00
	2	190.2	1279.0	7.2	257.31	100.00	.10	-2000.00	-2000.000	2.56	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
	3	97.8	1312.0	12.8	156.62	3.00	.30	-2000.00	-2000.000	3.21	-2000.00
	4	59.9	1342.0	13.7	430.38	100.00	.10	-2000.00	-2000.000	1.30	-2000.00
	5	51.7	1740.0	14.1	435.86	100.00	.10	-2000.00	-2000.000	1.14	-2000.00
1350	1	348.9	842.0	2.5	101.32	.03	.10	-2000.00	-2000.000	2.71	-2000.00
	2	152.4	1104.0	4.0	153.15	30.00	.10	-2000.00	-2000.000	1.46	-2000.00
	3	112.0	1610.0	8.2	285.49	100.00	.10	-2000.00	-2000.000	.89	-2000.00
	4	61.4	1482.0	13.6	239.83	10.00	.20	-2000.00	-2000.000	.88	-2000.00
	5	38.9	1410.0	14.0	436.46	100.00	.10	-2000.00	-2000.000	1.08	-2000.00
1375	1	470.3	738.0	2.7	105.79	30.00	.10	-2000.00	-2000.000	2.95	-2000.00
	2	233.9	1101.0	4.3	176.01	.01	.10	-2000.00	-2000.000	1.23	-2000.00
	3	121.0	1130.0	4.0	172.95	.10	.10	-2000.00	-2000.000	8.25	-2000.00
	4	94.7	1486.0	9.8	113.51	3.00	.30	-2000.00	-2000.000	4.53	-2000.00
	5	54.1	1274.0	13.4	422.21	100.00	.10	-2000.00	-2000.000	.63	-2000.00

IPR-11 DATA SUMMARY

SURVEY : MINNOVA - MT. SICKER PROPERTY

INDEX FILE : L-1500W.IND
DATA FILE : L-1500W.DAT

LINE NO. : 1500

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1375	2	1	10.3	8.3	7.3	6.8	5.3	4.1	3.4	2.7	2.1	1.8	470.3	-5.	738.
		2	16.8	14.0	12.4	11.3	8.9	6.7	5.4	4.3	3.3	2.7	233.9	-18.	1101.
		3	17.6	14.7	13.0	11.9	9.1	6.7	5.3	4.0	3.2	3.4	121.0	25.	1130.
		4	30.5	25.9	23.3	21.6	17.9	14.2	11.9	9.8	7.7	5.4	94.7	26.	1486.
		5	47.5	40.4	36.3	33.3	26.8	20.5	16.9	13.4	10.5	8.6	54.1	2.	1274.
1350	2	1	9.5	7.8	7.2	6.3	4.9	3.9	3.2	2.5	2.0	1.5	348.9	-23.	842.
		2	14.8	12.6	11.1	10.1	8.1	6.2	5.0	4.0	3.2	2.6	152.4	14.	1104.
		3	28.7	24.7	22.0	20.1	16.3	12.5	10.2	8.2	6.4	5.3	112.0	20.	1610.
		4	46.1	39.8	35.6	32.6	26.6	20.6	16.9	13.6	10.7	8.8	61.4	10.	1482.
		5	50.0	42.8	37.9	34.5	28.0	21.3	17.4	14.0	11.0	9.1	38.9	-25.	1410.
1325	2	1	8.4	7.3	6.1	5.3	4.4	3.5	2.9	2.2	1.6	1.3	327.7	2.	734.
		2	25.8	21.7	19.2	18.0	14.3	10.7	8.7	7.2	5.8	4.8	190.2	15.	1279.
		3	43.8	37.8	33.6	31.1	25.2	21.6	16.0	12.8	10.1	8.3	97.8	6.	1312.
		4	48.4	41.6	36.8	34.0	27.3	20.9	17.2	13.7	10.9	9.0	59.9	-15.	1342.
		5	49.5	42.5	37.5	34.6	27.7	21.3	17.5	14.1	11.1	9.0	51.7	-6.	1740.
1300	2	1	29.2	23.6	20.9	18.9	14.9	11.2	9.1	7.2	5.6	4.5	749.4	1.	1307.
		2	39.9	34.0	30.7	28.1	22.8	17.6	14.5	11.7	9.2	7.6	191.0	2.	999.
		3	47.6	40.3	36.5	33.3	26.9	20.7	17.0	13.6	10.7	8.8	109.6	-17.	1140.
		4	47.8	40.4	36.4	33.2	26.7	20.5	16.7	13.4	10.4	8.7	90.5	0.	1578.
		5	46.2	38.9	35.2	31.9	25.6	19.6	16.1	12.8	10.0	8.2	52.2	11.	1365.
1275	2	1	28.8	24.2	21.8	20.0	16.2	12.5	10.4	8.4	6.6	5.4	206.1	-12.	647.
		2	44.2	37.5	33.6	30.8	24.7	18.7	15.3	12.3	9.6	7.9	92.5	-23.	871.
		3	45.7	38.5	34.5	31.6	25.4	19.2	15.8	12.5	9.7	7.9	74.1	-1.	1392.
		4	42.5	33.4	30.2	26.1	22.0	14.6	12.6	8.9	8.1	7.2	33.4	10.	1049.
		5	48.3	43.4	38.7	37.6	28.7	24.4	19.5	17.1	12.2	9.2	25.8	-20.	1215.
1250	2	1	23.5	19.5	17.4	15.9	12.7	9.7	7.9	6.4	5.0	4.1	726.1	-38.	759.

		2	33.9	28.3	25.2	23.1	18.4	13.9	11.3	9.0	7.1	5.8	392.7	-4.	1233.
		3	36.8	30.7	27.5	25.2	19.9	14.9	12.1	9.6	7.4	6.0	199.0	13.	1240.
		4	40.9	34.3	30.7	28.3	22.4	17.1	14.0	11.2	8.8	7.2	101.1	-18.	1050.
		5	42.2	34.9	31.1	28.3	22.4	17.0	13.5	10.6	8.4	6.9	36.3	20.	570.
1225	2	1	17.6	14.4	12.7	11.4	9.1	6.8	5.7	4.5	3.5	2.8	384.4	-14.	928.
		2	25.7	21.4	18.9	17.1	13.5	9.9	8.0	6.3	4.9	4.0	150.4	9.	1089.
		3	30.4	25.6	22.6	20.5	16.4	12.4	10.1	7.9	6.2	5.1	67.6	-23.	977.
		4	32.8	27.6	24.6	22.3	18.1	14.0	11.9	9.4	7.6	6.4	22.3	25.	538.
		5	30.4	25.5	22.5	20.2	16.1	11.7	9.5	7.2	5.4	4.3	31.5	-19.	1139.
1200	2	1	11.9	9.7	8.4	7.6	6.0	4.6	3.7	3.0	2.3	1.9	357.8	-4.	936.
		2	21.4	17.9	15.8	14.4	11.5	8.7	7.1	5.7	4.5	3.8	123.4	-26.	968.
		3	25.7	21.5	18.7	16.9	13.2	9.6	7.5	5.9	4.8	3.7	34.8	26.	545.
		4	24.7	20.7	18.3	16.8	13.1	9.9	8.0	6.1	4.3	3.4	45.2	-13.	1183.
		5	29.9	25.2	22.4	20.3	15.9	11.9	9.4	7.6	5.8	4.8	30.8	14.	1207.
1175	2	1	15.0	12.3	10.9	9.8	7.8	5.9	4.8	3.8	2.9	2.4	1190.0	-46.	2190.
		2	26.3	22.2	19.6	17.6	13.6	9.9	7.8	6.1	4.7	3.8	155.2	17.	859.
		3	18.2	15.3	13.5	12.1	9.4	7.3	6.3	5.4	4.3	3.4	138.5	-12.	1530.
		4	25.1	21.1	18.6	16.7	13.1	9.6	7.0	4.6	3.2	2.7	82.1	24.	1517.
		5	28.4	23.0	20.2	19.8	15.4	10.8	8.8	7.0	5.3	4.2	52.5	23.	1455.
1150	2	1	11.7	9.5	8.4	7.6	6.1	4.6	3.8	3.1	2.4	2.0	390.4	9.	766.
		2	14.9	12.2	10.6	9.6	7.6	5.6	4.5	3.6	2.8	2.3	243.0	-22.	1430.
		3	21.9	18.1	15.8	14.3	11.2	8.2	6.5	5.1	3.9	3.2	125.3	20.	1470.
		4	25.2	20.7	18.1	16.4	12.9	9.6	8.0	6.2	4.7	3.8	74.0	32.	1452.
		5	22.8	18.8	16.2	14.8	11.6	8.7	7.0	5.5	4.1	3.4	73.4	-7.	2160.
1125	2	1	11.8	9.6	8.5	7.6	6.1	4.6	3.8	3.0	2.3	1.9	716.4	-38.	1405.
		2	20.8	17.3	15.2	13.7	10.8	7.9	6.4	5.0	3.9	3.1	282.1	20.	1660.
		3	23.9	19.8	17.4	15.6	12.4	9.1	7.4	5.8	4.5	3.6	141.4	28.	1660.
		4	21.6	17.9	15.8	14.2	11.3	8.2	6.6	5.2	4.0	3.2	119.9	-2.	2350.
		5	22.5	18.5	16.1	14.5	11.4	8.3	6.6	5.2	3.9	3.1	61.9	3.	1823.
1100	2	1	12.6	10.3	8.9	8.0	6.3	4.7	3.8	3.0	2.3	1.9	560.7	4.	1354.
		2	20.5	17.0	14.8	13.3	10.5	7.8	6.2	4.9	3.7	3.0	213.0	24.	1543.
		3	19.6	16.3	14.3	12.9	10.1	7.4	5.9	4.7	3.6	2.9	155.8	-7.	2250.
		4	19.6	16.2	14.2	13.0	10.1	7.7	6.1	4.9	3.7	3.1	69.3	12.	1674.
		5	31.1	26.0	23.4	21.4	17.0	12.6	10.3	8.2	6.3	5.2	49.2	-20.	1781.
1075	2	1	17.5	14.1	12.2	11.2	8.6	6.4	5.2	4.1	3.2	2.5	849.5	10.	2051.
		2	20.0	16.4	14.3	13.1	10.0	7.4	5.9	4.5	3.5	2.8	450.7	-12.	3265.
		3	17.9	14.4	12.7	11.4	9.0	6.5	5.2	4.0	3.1	2.5	147.2	10.	2120.
		4	30.1	25.2	22.5	20.5	16.3	12.3	10.1	7.9	6.2	5.0	91.1	-13.	2199.
		5	18.2	14.6	12.9	11.7	9.0	6.7	5.6	4.3	3.3	2.7	50.6	-1.	1832.
1050	2	1	10.4	8.7	7.3	6.7	5.2	3.9	3.2	2.5	1.9	1.5	1814.0	-22.	3350.
		2	10.1	8.5	7.0	6.4	5.0	3.6	2.8	2.2	1.7	1.4	418.9	7.	2321.
		3	23.9	20.5	17.9	16.3	12.9	9.6	7.7	6.1	4.7	3.8	228.6	-17.	2520.

		4	14.8	12.8	11.1	10.1	8.2	6.3	5.2	4.2	3.4	2.9	113.0	6.	2080.
		5	21.1	17.8	15.4	14.0	11.2	8.4	6.8	5.4	4.1	3.3	79.6	20.	2205.
1025	2	1	4.0	3.0	2.5	2.0	1.7	1.3	1.0	.8	.6	.5	1088.0	-1.	1890.
		2	21.7	18.4	16.4	14.7	11.8	8.9	7.2	5.7	4.5	3.7	461.2	-20.	2413.
		3	12.4	10.4	9.2	8.0	6.5	4.9	3.9	3.1	2.3	1.9	200.7	2.	2090.
		4	18.6	15.5	13.5	12.0	9.8	7.3	5.7	4.7	3.6	3.1	129.4	24.	2250.
		5	25.1	21.4	19.5	17.2	13.4	10.0	8.6	6.2	5.1	3.9	84.2	-15.	2202.
1000	2	1	16.3	13.5	12.2	11.1	8.9	6.9	5.7	4.6	3.6	3.0	989.8	-34.	2589.
		2	12.0	9.9	8.8	7.7	6.2	4.7	3.8	3.0	2.3	1.9	306.5	-1.	2406.
		3	18.2	15.0	13.6	12.1	9.7	7.3	6.0	4.7	3.7	3.0	163.4	21.	2550.
		4	23.9	19.8	17.6	15.9	12.8	9.5	7.4	6.2	4.7	3.8	93.1	-15.	2435.
		5	24.2	20.0	17.5	15.7	11.9	9.2	8.4	5.4	4.9	3.7	48.8	-28.	1917.
975	2	1	16.0	13.1	11.8	10.8	8.7	6.7	5.5	4.4	3.5	2.8	1924.0	-14.	3170.
		2	22.7	18.9	17.0	15.4	12.1	9.0	7.3	5.7	4.4	3.6	615.5	16.	3051.
		3	24.6	20.8	18.4	16.7	13.4	10.1	8.2	6.5	5.0	4.1	280.8	-20.	2770.
		4	25.7	21.2	18.8	15.6	14.4	7.8	7.6	5.6	3.6	4.6	133.9	-18.	2210.
950	2	1	17.0	14.3	13.0	11.6	9.4	7.3	6.1	4.9	3.9	3.2	1482.0	4.	2900.
		2	25.6	21.2	19.1	17.2	13.9	10.6	8.8	7.0	5.5	4.5	429.0	-27.	2525.
		3	27.8	22.4	20.0	17.9	14.3	10.7	8.8	7.0	5.4	4.4	179.3	-23.	2100.
925	2	1	12.3	10.3	9.2	8.3	6.9	5.4	4.5	3.6	2.8	2.3	831.2	-12.	1739.
		2	19.7	16.1	14.0	12.6	10.0	7.4	6.0	4.7	3.6	3.0	269.1	-27.	1689.
900	2	1	13.3	11.0	9.6	8.8	7.1	5.4	4.5	3.7	2.8	2.3	859.3	-27.	2075.

IPR-11 SPECTRAL ANALYSIS SUMMARY

LINE NO. : 1600

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
900	1	499.8	1307.0	4.3	178.58	.01	.10	-2000.00	-2000.000	2.09	-2000.00
925	1	691.6	987.0	5.7	109.98	10.00	.20	-2000.00	-2000.000	1.18	-2000.00
	2	295.7	1266.0	7.2	136.72	.03	.30	-2000.00	-2000.000	3.69	-2000.00
950	1	508.2	1227.0	5.8	210.17	10.00	.10	-2000.00	-2000.000	.94	-2000.00
	2	176.0	1275.0	6.0	244.11	.01	.10	-2000.00	-2000.000	1.89	-2000.00
	3	90.3	1305.0	5.7	63.33	.30	.40	-2000.00	-2000.000	3.64	-2000.00
975	1	1800.0	3530.0	4.9	180.73	1.00	.10	-2000.00	-2000.000	1.56	-2000.00
	2	219.5	1292.0	7.0	162.49	.03	.20	-2000.00	-2000.000	.78	-2000.00
	3	110.4	1290.0	4.6	122.47	.01	.20	-2000.00	-2000.000	1.51	-2000.00
	4	64.8	1271.0	4.2	90.94	.03	.30	-2000.00	-2000.000	8.92	-2000.00
1000	1	549.8	1438.0	3.9	38.40	.30	.40	-2000.00	-2000.000	7.22	-2000.00
	2	276.8	2172.0	5.3	213.11	.01	.10	-2000.00	-2000.000	.86	-2000.00
	3	60.7	951.0	5.3	199.85	30.00	.10	-2000.00	-2000.000	3.64	-2000.00
	4	38.8	1014.0	3.7	32.02	.30	.60	-2000.00	-2000.000	2.60	-2000.00
	5	25.6	1006.0	4.0	107.97	.01	.20	-2000.00	-2000.000	2.53	-2000.00
1025	1	860.6	2251.0	1.7	40.79	.03	.20	-2000.00	-2000.000	3.33	-2000.00
	2	279.8	2196.0	4.4	103.08	.03	.20	-2000.00	-2000.000	1.54	-2000.00
	3	118.2	1850.0	6.0	228.62	.10	.10	-2000.00	-2000.000	1.24	-2000.00
	4	31.6	827.0	4.1	37.51	.30	.50	-2000.00	-2000.000	4.75	-2000.00
	5	22.6	886.0	4.1	107.17	.01	.20	-2000.00	-2000.000	2.23	-2000.00
1050	1	1474.0	2430.0	2.3	93.23	.10	.10	-2000.00	-2000.000	3.27	-2000.00
	2	484.5	2402.0	3.1	73.67	.03	.20	-2000.00	-2000.000	1.96	-2000.00
	3	236.7	2340.0	4.9	125.92	.01	.20	-2000.00	-2000.000	1.26	-2000.00
	4	123.5	2040.0	6.9	274.83	.01	.10	-2000.00	-2000.000	2.02	-2000.00
	5	38.1	943.0	4.2	110.44	.01	.20	-2000.00	-2000.000	2.30	-2000.00
1075	1	658.5	1088.0	2.6	108.00	.01	.10	-2000.00	-2000.000	1.68	-2000.00
	2	356.7	1768.0	3.5	83.92	.03	.20	-2000.00	-2000.000	1.24	-2000.00
	3	189.9	1870.0	4.1	106.69	.01	.20	-2000.00	-2000.000	.92	-2000.00
	4	116.3	1920.0	6.1	247.95	.01	.10	-2000.00	-2000.000	1.92	-2000.00
	5	72.5	1797.0	7.5	154.96	.10	.20	-2000.00	-2000.000	1.44	-2000.00
1100	1	463.4	1039.0	3.4	79.95	.03	.20	-2000.00	-2000.000	1.75	-2000.00
	2	168.7	1135.0	4.2	90.03	.10	.20	-2000.00	-2000.000	2.36	-2000.00
	3	130.9	1750.0	4.3	92.96	.10	.20	-2000.00	-2000.000	1.58	-2000.00
	4	83.4	1871.0	5.2	134.33	.01	.20	-2000.00	-2000.000	1.16	-2000.00
	5	58.8	1979.0	6.8	143.19	.10	.20	-2000.00	-2000.000	1.51	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
1125	1	241.9	690.0	6.0	127.54	.10	.20	-2000.00	-2000.000	1.59	-2000.00
	2	116.1	994.0	5.7	147.65	.01	.20	-2000.00	-2000.000	1.28	-2000.00
	3	65.6	1121.0	5.3	122.10	.03	.20	-2000.00	-2000.000	1.41	-2000.00
	4	58.6	1672.0	5.1	119.49	.03	.20	-2000.00	-2000.000	1.79	-2000.00
	5	45.2	1934.0	6.0	240.94	.01	.10	-2000.00	-2000.000	2.81	-2000.00
1150	1	684.8	1131.0	2.8	72.86	.01	.20	-2000.00	-2000.000	2.26	-2000.00
	2	164.5	815.0	7.1	163.61	.03	.20	-2000.00	-2000.000	1.04	-2000.00
	3	110.0	1080.0	6.0	139.44	.03	.20	-2000.00	-2000.000	1.45	-2000.00
	4	71.2	1176.0	5.9	238.62	.01	.10	-2000.00	-2000.000	2.48	-2000.00
	5	69.1	1712.0	5.7	120.90	.10	.20	-2000.00	-2000.000	2.38	-2000.00
1175	1	579.3	1515.0	3.3	70.75	.10	.20	-2000.00	-2000.000	3.37	-2000.00
	2	123.8	971.0	5.0	128.37	.01	.20	-2000.00	-2000.000	2.09	-2000.00
	3	45.5	712.0	8.6	330.10	.01	.10	-2000.00	-2000.000	1.70	-2000.00
	4	36.3	948.0	7.0	161.47	.03	.20	-2000.00	-2000.000	1.06	-2000.00
	5	26.1	1022.0	7.0	277.24	.01	.10	-2000.00	-2000.000	1.55	-2000.00
1200	1	1105.0	1820.0	5.6	118.82	.10	.20	-2000.00	-2000.000	1.57	-2000.00
	2	216.3	1072.0	7.8	292.60	.03	.10	-2000.00	-2000.000	.97	-2000.00
	3	84.3	834.0	8.1	312.49	.01	.10	-2000.00	-2000.000	1.05	-2000.00
	4	37.6	621.0	12.3	426.73	.10	.10	-2000.00	-2000.000	1.73	-2000.00
	5	32.7	809.0	8.8	191.49	.30	.20	-2000.00	-2000.000	8.03	-2000.00
1225	1	333.3	951.4	13.3	417.28	100.00	.10	-2000.00	-2000.000	1.01	-2000.00
	2	118.2	1012.2	12.6	411.95	1.00	.10	-2000.00	-2000.000	.97	-2000.00
	3	54.1	925.3	11.3	378.29	1.00	.10	-2000.00	-2000.000	.93	-2000.00
	4	25.8	737.6	11.2	376.83	.30	.10	-2000.00	-2000.000	1.06	-2000.00
	5	12.7	543.4	13.4	503.05	.01	.10	-2000.00	-2000.000	3.24	-2000.00
1250	1	512.5	1072.0	10.3	342.69	100.00	.10	-2000.00	-2000.000	1.02	-2000.00
	2	180.8	1135.0	13.3	417.93	30.00	.10	-2000.00	-2000.000	.54	-2000.00
	3	86.6	1085.0	12.2	419.01	.10	.10	-2000.00	-2000.000	.48	-2000.00
	4	47.8	999.0	12.0	387.06	30.00	.10	-2000.00	-2000.000	1.26	-2000.00
	5	24.0	752.0	11.3	235.87	100.00	.20	-2000.00	-2000.000	5.45	-2000.00
1275	1	556.2	1455.0	3.1	116.96	10.00	.10	-2000.00	-2000.000	2.45	-2000.00
	2	150.5	1181.0	11.9	386.70	30.00	.10	-2000.00	-2000.000	.77	-2000.00
	3	69.0	1080.0	12.8	406.51	30.00	.10	-2000.00	-2000.000	.99	-2000.00
	4	37.9	991.0	12.4	401.65	3.00	.10	-2000.00	-2000.000	1.33	-2000.00
	5	22.9	900.0	11.5	210.55	1.00	.20	-2000.00	-2000.000	1.73	-2000.00
1300	1	413.6	1180.0	4.5	165.61	3.00	.10	-2000.00	-2000.000	1.24	-2000.00
	2	179.4	1536.0	2.6	103.22	1.00	.10	-2000.00	-2000.000	1.88	-2000.00
	3	63.3	1082.0	11.6	105.60	1.00	.40	-2000.00	-2000.000	1.69	-2000.00
	4	34.1	973.0	11.7	220.48	10.00	.20	-2000.00	-2000.000	4.21	-2000.00
	5	20.7	886.0	11.0	374.68	.30	.10	-2000.00	-2000.000	1.32	-2000.00

IPR-11 DATA SUMMARY

SURVEY : MINNOVA - MT. SICKER PROPERTY

INDEX FILE : L-1600W.IND
DATA FILE : L-1600W.DAT

LINE NO. = 1600

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1300	2	1	16.4	13.7	12.2	11.2	9.0	6.8	5.6	4.5	3.5	2.8	413.6	-5.	1180.
		2	10.1	8.3	7.3	6.8	5.4	4.1	3.4	2.6	2.1	1.7	179.4	-11.	1536.
		3	40.6	34.6	31.0	28.6	23.1	17.8	14.7	11.6	8.8	6.9	63.3	19.	1082.
		4	43.7	36.6	32.6	30.0	24.0	18.0	14.6	11.7	9.6	8.6	34.1	1.	973.
		5	41.6	34.4	30.5	28.3	22.5	16.9	13.9	11.0	8.6	7.0	20.7	-8.	886.
1275	2	1	11.5	9.2	8.2	7.6	6.1	4.7	3.9	3.1	2.4	1.9	556.2	-20.	1455.
		2	43.2	36.7	32.8	30.2	24.1	18.3	15.0	11.9	9.4	7.7	150.5	12.	1181.
		3	46.3	39.1	34.7	32.2	25.6	19.5	16.1	12.8	10.0	8.2	69.0	22.	1080.
		4	46.0	38.5	33.7	31.8	25.3	19.2	15.6	12.4	9.7	7.9	37.9	-25.	991.
		5	43.2	36.1	31.2	30.0	23.5	18.0	14.7	11.5	9.0	7.3	22.9	-12.	900.
1250	2	1	36.0	30.7	27.6	25.2	20.3	15.6	12.8	10.3	8.1	6.6	512.5	3.	1072.
		2	47.4	40.6	36.3	33.1	26.7	20.3	16.6	13.3	10.4	8.5	180.8	11.	1135.
		3	45.7	39.1	34.7	31.6	25.2	19.1	15.5	12.2	9.5	7.8	86.6	-12.	1085.
		4	43.2	37.4	33.0	29.9	24.0	18.2	14.8	12.0	9.5	7.7	47.8	-26.	999.
		5	40.6	35.1	30.1	27.8	22.3	17.0	14.3	11.3	10.6	8.0	24.0	17.	752.
1225	2	1	46.6	39.7	35.4	32.5	26.3	20.2	16.6	13.3	10.4	8.5	333.3	1.	951.
		2	47.0	39.9	35.3	32.2	25.7	19.4	15.8	12.6	9.8	8.1	118.2	-21.	1012.
		3	42.2	35.8	31.5	28.9	23.2	17.6	14.3	11.3	8.8	7.3	54.1	-18.	925.
		4	41.5	35.2	30.8	28.2	22.7	17.1	14.0	11.2	8.6	7.0	25.8	12.	738.
		5	53.8	45.8	40.0	37.8	29.9	21.5	18.2	13.4	11.7	8.7	12.7	8.	543.
1200	2	1	22.4	18.7	16.4	14.8	11.7	8.8	7.1	5.6	4.4	3.5	1105.0	-38.	1820.
		2	29.7	25.2	22.2	19.9	16.0	12.1	9.8	7.8	6.0	4.9	216.3	-18.	1072.
		3	31.3	26.5	23.4	21.1	16.9	12.6	10.2	8.1	6.2	5.0	84.3	19.	834.
		4	47.9	40.4	35.7	32.2	25.6	19.2	15.5	12.3	9.8	8.1	37.6	-8.	621.
		5	33.3	34.0	32.7	24.0	22.1	16.6	13.0	8.8	7.4	6.4	32.7	26.	809.
1175	2	1	13.8	11.1	9.6	8.5	6.8	5.1	4.1	3.3	2.6	2.0	579.3	-30.	1515.

		2	21.3	18.0	15.6	14.0	10.6	7.7	6.3	5.0	3.8	3.0	123.8	10.	971.
		3	33.7	28.2	24.8	22.3	17.7	13.4	10.7	8.6	6.8	5.3	45.5	4.	712.
		4	29.2	24.4	21.5	19.2	15.2	11.2	9.0	7.0	5.3	4.3	36.3	16.	948.
		5	27.5	23.1	20.5	18.1	14.6	10.9	8.8	7.0	5.5	4.5	26.1	32.	1022.
1150	2	1	12.0	10.0	8.3	7.8	5.9	4.4	3.6	2.8	2.1	1.7	684.8	-1.	1131.
		2	29.5	24.7	21.4	19.6	15.3	11.4	9.1	7.1	5.4	4.4	164.5	-1.	815.
		3	25.2	21.0	18.1	16.6	13.0	9.6	7.8	6.0	4.5	3.7	110.0	30.	1080.
		4	23.9	19.9	17.2	15.7	12.4	9.1	7.4	5.9	4.6	3.8	71.2	15.	1176.
		5	23.4	19.0	16.2	15.0	12.0	9.0	7.3	5.7	4.4	3.6	69.1	-3.	1712.
1125	2	1	24.5	20.0	17.7	16.1	12.7	9.5	7.7	6.0	4.6	3.8	241.9	-7.	690.
		2	24.6	20.0	17.6	16.1	12.4	9.2	7.4	5.7	4.4	3.5	116.1	17.	994.
		3	21.9	17.8	15.7	14.4	11.2	8.4	6.8	5.3	4.0	3.2	65.6	34.	1121.
		4	21.7	17.5	15.4	14.2	11.0	8.1	6.5	5.1	3.9	3.2	58.6	-18.	1672.
		5	24.6	19.5	17.5	15.9	12.4	9.1	7.6	6.0	4.7	3.8	45.2	18.	1934.
1100	2	1	14.2	11.6	10.1	9.1	7.2	5.4	4.4	3.4	2.6	2.1	463.4	5.	1039.
		2	17.1	14.1	12.5	11.2	8.8	6.6	5.3	4.2	3.1	2.7	168.7	29.	1135.
		3	17.5	14.5	12.7	11.5	9.2	6.8	5.5	4.3	3.4	2.7	130.9	3.	1750.
		4	21.9	18.3	16.0	14.3	11.3	8.3	6.7	5.2	4.0	3.2	83.4	2.	1871.
		5	27.2	22.8	19.8	18.0	14.4	10.7	8.6	6.8	5.3	4.3	58.8	-11.	1979.
1075	2	1	10.1	8.4	7.3	6.7	5.3	4.0	3.2	2.6	2.0	1.6	658.5	18.	1088.
		2	14.8	12.3	10.9	9.9	7.7	5.7	4.5	3.5	2.7	2.2	356.7	-9.	1768.
		3	17.5	14.4	12.7	11.4	8.9	6.6	5.3	4.1	3.1	2.5	189.9	15.	1870.
		4	24.4	20.3	18.0	16.3	12.9	9.6	7.7	6.1	4.9	4.0	116.3	-21.	1920.
		5	29.6	24.5	21.8	19.7	15.6	11.7	9.5	7.5	5.8	4.5	72.5	0.	1797.
1050	2	1	9.4	7.2	6.5	6.1	4.7	3.6	2.9	2.3	1.8	1.5	1474.0	-20.	2430.
		2	13.3	10.6	9.4	8.6	6.7	4.9	4.0	3.1	2.4	1.9	484.5	4.	2402.
		3	20.5	16.8	15.0	13.7	10.6	7.9	6.4	4.9	3.7	2.9	236.7	-2.	2340.
		4	27.4	22.7	20.0	18.2	14.3	10.7	8.7	6.9	5.5	4.5	123.5	-12.	2040.
		5	18.9	14.9	13.1	11.7	9.2	6.8	5.5	4.2	3.2	2.6	38.1	-6.	943.
1025	2	1	7.3	5.9	5.1	4.4	3.6	2.7	2.2	1.7	1.3	1.1	860.6	-11.	2251.
		2	18.2	15.4	13.5	12.1	9.5	6.9	5.5	4.4	3.4	2.7	279.8	-12.	2196.
		3	23.2	19.5	17.3	15.6	12.5	9.4	7.6	6.0	4.7	3.9	118.2	5.	1850.
		4	18.6	15.2	13.1	11.6	8.9	6.4	5.5	4.1	3.0	2.1	31.6	-24.	827.
		5	18.1	14.7	12.8	11.5	8.9	6.4	5.4	4.1	3.1	2.5	22.6	37.	886.
1000	2	1	14.0	11.6	10.4	9.5	7.6	6.0	5.1	3.9	2.4	1.9	549.8	-39.	1438.
		2	20.4	17.0	15.1	13.8	11.0	8.3	6.7	5.3	4.1	3.3	276.8	0.	2172.
		3	20.4	17.0	15.0	13.5	10.6	8.0	6.6	5.3	4.3	3.7	60.7	-2.	951.
		4	18.7	15.5	13.5	12.3	9.7	6.6	5.1	3.7	2.6	1.8	38.8	21.	1014.
		5	17.9	15.0	13.0	11.4	9.1	6.5	5.2	4.0	3.2	2.6	25.6	-25.	1006.
975	2	1	18.3	15.2	13.4	12.2	9.8	7.5	6.1	4.9	3.8	3.1	1800.0	-24.	3530.
		2	28.7	24.4	21.5	19.6	15.3	11.2	9.0	7.0	5.4	4.4	219.5	-12.	1292.
		3	20.1	16.7	14.6	13.3	10.4	7.7	6.2	4.6	3.5	2.9	110.4	40.	1290.

		4	21.9	18.2	16.8	15.5	11.5	6.3	5.7	4.2	3.6	3.0	64.8	-43.	1271.
950	2	1	21.2	17.8	15.9	14.5	11.7	8.9	7.3	5.8	4.5	3.7	508.2	-25.	1227.
		2	24.3	20.0	17.7	16.1	12.7	9.5	7.7	6.0	4.7	3.9	176.0	25.	1275.
		3	24.2	19.6	17.5	15.8	13.8	10.0	7.6	5.7	4.2	3.3	90.3	-20.	1305.
925	2	1	19.0	16.8	15.3	14.3	11.3	8.6	7.1	5.7	4.4	3.7	691.6	-2.	987.
		2	35.7	27.5	23.3	20.5	16.1	11.9	9.4	7.2	5.3	4.0	295.7	0.	1266.
900	2	1	17.3	14.3	12.5	11.5	9.0	6.8	5.5	4.3	3.3	2.8	499.8	-31.	1307.

IPR-11 SPECTRAL ANALYSIS SUMMARY

LINE NO. : 1700

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
900	1	389.9	720.0	2.7	63.59	.03	.20	-2000.00	-2000.000	3.37	-2000.00
925	1	179.6	512.0	3.2	64.94	10.00	.20	-2000.00	-2000.000	2.51	-2000.00
	2	129.0	1104.0	4.3	101.56	.03	.20	-2000.00	-2000.000	1.71	-2000.00
950	1	253.0	611.0	2.7	109.77	.03	.10	-2000.00	-2000.000	1.36	-2000.00
	2	149.0	1079.0	4.2	109.37	.01	.20	-2000.00	-2000.000	1.47	-2000.00
	3	128.3	1850.0	5.3	217.46	.01	.10	-2000.00	-2000.000	2.35	-2000.00
975	1	279.0	730.0	3.2	121.54	10.00	.10	-2000.00	-2000.000	1.22	-2000.00
	2	138.7	1088.0	4.0	85.48	.10	.20	-2000.00	-2000.000	2.37	-2000.00
	3	89.5	1402.0	4.9	111.45	.03	.20	-2000.00	-2000.000	2.52	-2000.00
	4	81.8	2139.0	5.4	117.88	.10	.20	-2000.00	-2000.000	3.36	-2000.00
1000	1	660.9	902.0	3.1	118.84	30.00	.10	-2000.00	-2000.000	2.56	-2000.00
	2	298.7	1223.0	4.0	94.03	.03	.20	-2000.00	-2000.000	1.35	-2000.00
	3	178.5	1450.0	4.1	94.85	.03	.20	-2000.00	-2000.000	1.53	-2000.00
	4	122.4	1670.0	4.6	97.60	.10	.20	-2000.00	-2000.000	2.16	-2000.00
1025	1	595.1	1245.0	3.0	121.21	.03	.10	-2000.00	-2000.000	1.50	-2000.00
	2	184.2	1156.0	3.0	69.17	.03	.20	-2000.00	-2000.000	1.62	-2000.00
	3	103.5	1290.0	4.1	83.40	10.00	.20	-2000.00	-2000.000	4.81	-2000.00
	4	62.6	1310.0	3.0	24.44	.30	.60	-2000.00	-2000.000	6.36	-2000.00
1050	1	537.5	1205.0	2.8	108.35	1.00	.10	-2000.00	-2000.000	2.27	-2000.00
	2	153.8	1034.0	4.7	121.98	.01	.20	-2000.00	-2000.000	.87	-2000.00
	3	71.0	953.0	3.7	93.45	.01	.20	-2000.00	-2000.000	2.27	-2000.00
	4	46.4	1041.0	3.6	76.92	.10	.20	-2000.00	-2000.000	4.89	-2000.00
1075	1	1152.0	2410.0	3.6	84.11	.03	.20	-2000.00	-2000.000	1.32	-2000.00
	2	250.1	1570.0	3.6	85.62	.03	.20	-2000.00	-2000.000	1.58	-2000.00
	3	86.3	1081.0	4.6	42.67	.30	.50	-2000.00	-2000.000	2.41	-2000.00
	4	45.1	943.0	4.7	106.50	100.00	.20	-2000.00	-2000.000	7.71	-2000.00
	5	31.6	990.0	4.3	99.06	.03	.20	-2000.00	-2000.000	2.52	-2000.00
1100	1	526.2	751.0	4.2	110.04	.01	.20	-2000.00	-2000.000	1.51	-2000.00
	2	212.2	908.0	5.9	151.48	.01	.20	-2000.00	-2000.000	.84	-2000.00
	3	107.6	910.0	5.9	137.33	.03	.20	-2000.00	-2000.000	1.21	-2000.00
	4	48.4	690.0	6.7	142.51	.10	.20	-2000.00	-2000.000	1.48	-2000.00
	5	29.4	630.0	5.9	137.84	.03	.20	-2000.00	-2000.000	1.75	-2000.00
1125	1	388.8	1017.0	6.5	167.02	.01	.20	-2000.00	-2000.000	1.49	-2000.00
	2	136.1	1068.0	6.3	145.18	.03	.20	-2000.00	-2000.000	1.22	-2000.00
	3	63.4	992.0	7.5	77.73	.30	.40	-2000.00	-2000.000	5.35	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
	4	41.6	1089.0	6.5	254.13	1.00	.10	-2000.00	-2000.000	7.94	-2000.00
	5	20.8	816.0	7.5	173.21	.03	.20	-2000.00	-2000.000	1.72	-2000.00
1150	1	889.9	1552.0	6.0	217.72	100.00	.10	-2000.00	-2000.000	1.45	-2000.00
	2	148.0	774.0	12.5	272.22	.03	.20	-2000.00	-2000.000	1.20	-2000.00
	3	82.8	865.0	10.2	382.66	.01	.10	-2000.00	-2000.000	.82	-2000.00
	4	45.9	800.0	10.5	358.00	1.00	.10	-2000.00	-2000.000	2.11	-2000.00
	5	35.3	923.0	10.5	352.07	3.00	.10	-2000.00	-2000.000	1.26	-2000.00
1175	1	987.9	2068.0	10.3	184.79	10.00	.20	-2000.00	-2000.000	1.99	-2000.00
	2	269.8	1694.0	11.3	371.81	100.00	.10	-2000.00	-2000.000	.73	-2000.00
	3	65.6	822.0	17.2	549.14	.10	.10	-2000.00	-2000.000	1.21	-2000.00
	4	41.3	863.0	13.2	177.03	.30	.30	-2000.00	-2000.000	1.08	-2000.00
	5	26.4	828.0	13.5	425.00	3.00	.10	-2000.00	-2000.000	.83	-2000.00
1200	1	349.8	646.0	20.9	344.05	10.00	.20	-2000.00	-2000.000	1.01	-2000.00
	2	199.4	1104.0	18.7	534.39	100.00	.10	-2000.00	-2000.000	.58	-2000.00
	3	103.8	1140.0	15.6	471.46	100.00	.10	-2000.00	-2000.000	.80	-2000.00
	4	34.2	631.0	19.1	615.88	.03	.10	-2000.00	-2000.000	.77	-2000.00
	5	27.1	752.0	15.2	486.68	.30	.10	-2000.00	-2000.000	.71	-2000.00
1225	1	692.4	1672.0	5.9	216.24	100.00	.10	-2000.00	-2000.000	1.84	-2000.00
	2	96.5	699.0	19.3	547.73	100.00	.10	-2000.00	-2000.000	.61	-2000.00
	3	81.5	1178.0	15.9	278.91	1.00	.20	-2000.00	-2000.000	.74	-2000.00
	4	44.9	1085.0	14.3	250.98	10.00	.20	-2000.00	-2000.000	2.93	-2000.00
	5	15.6	567.0	18.1	615.24	.01	.10	-2000.00	-2000.000	1.04	-2000.00
1250	1	682.9	1649.0	4.0	151.14	30.00	.10	-2000.00	-2000.000	1.45	-2000.00
	2	205.1	1486.0	6.6	247.61	.10	.10	-2000.00	-2000.000	.67	-2000.00
	3	38.4	555.0	17.8	519.96	100.00	.10	-2000.00	-2000.000	1.11	-2000.00
	4	38.6	931.0	14.2	451.13	1.00	.10	-2000.00	-2000.000	1.32	-2000.00
	5	23.3	843.0	12.2	395.50	3.00	.10	-2000.00	-2000.000	1.50	-2000.00

IPR-11 DATA SUMMARY

SURVEY : MINNOVA - MT. SICKER PROPERTY

INDEX FILE : L-1700W.IND
DATA FILE : L-1700W.DAT

LINE NO. : 1700

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1250	2	1	14.6	12.2	10.8	9.9	8.0	6.1	5.0	4.0	3.1	2.6	682.9	-42.	1649.
		2	24.9	21.1	18.8	17.2	13.7	10.3	8.4	6.6	5.2	4.2	205.1	-34.	1486.
		3	63.6	54.0	48.2	44.2	35.7	27.6	22.4	17.8	14.3	11.5	38.4	35.	555.
		4	52.7	44.4	39.3	36.1	28.8	21.5	17.8	14.2	11.0	9.2	38.6	11.	931.
		5	45.4	37.9	33.3	30.6	24.5	18.7	15.5	12.2	9.6	7.7	23.3	-2.	843.
1225	2	1	21.2	17.6	15.9	14.5	11.6	8.9	7.3	5.9	4.6	3.9	692.4	-50.	1672.
		2	68.8	58.4	52.6	48.2	38.7	29.6	24.2	19.3	15.2	12.4	96.5	33.	699.
		3	58.0	49.4	44.2	40.3	32.5	25.0	20.3	15.9	12.3	10.0	81.5	12.	1178.
		4	49.8	42.6	37.9	34.6	27.6	20.8	17.1	14.3	11.4	9.6	44.9	-4.	1085.
		5	70.2	59.2	52.2	47.7	37.8	28.4	22.9	18.1	14.2	11.6	15.6	48.	567.
1200	2	1	72.3	61.9	55.5	50.8	41.3	31.7	26.1	20.9	16.4	13.5	349.8	20.	646.
		2	66.1	56.5	50.7	46.3	37.3	28.5	23.3	18.7	14.6	12.0	199.4	15.	1104.
		3	55.3	47.2	42.4	38.5	31.1	23.8	19.4	15.6	12.2	10.1	103.8	-13.	1140.
		4	73.1	61.5	54.8	49.7	39.6	29.7	24.2	19.1	14.9	12.1	34.2	52.	631.
		5	57.0	48.0	43.2	38.8	31.3	23.6	19.1	15.2	11.8	9.7	27.1	-33.	752.
1175	2	1	34.9	29.7	26.7	24.4	20.1	14.9	12.2	10.3	8.0	6.4	987.9	-2.	2068.
		2	40.2	34.2	30.7	28.0	23.0	17.3	14.2	11.3	8.9	7.3	269.8	-12.	1694.
		3	65.2	55.1	48.9	44.5	35.3	26.5	21.4	17.2	13.4	11.1	65.6	38.	822.
		4	52.0	43.6	39.0	35.4	28.2	21.2	17.3	13.2	10.1	8.0	41.3	-17.	863.
		5	49.0	41.3	37.2	33.7	27.1	20.5	16.9	13.5	10.4	8.4	26.4	4.	828.
1150	2	1	21.4	17.9	15.9	14.6	11.8	9.0	7.4	6.0	4.7	3.8	889.9	-29.	1552.
		2	50.5	42.4	37.5	33.9	26.7	19.6	15.8	12.5	9.1	7.5	148.0	48.	774.
		3	39.2	32.9	29.1	26.8	21.2	15.9	12.9	10.2	7.9	6.4	82.8	-31.	865.
		4	39.6	33.1	29.4	27.2	21.4	16.2	13.2	10.5	8.2	7.1	45.9	9.	800.
		5	38.9	32.6	28.9	27.3	21.5	16.3	13.3	10.5	8.3	6.6	35.3	45.	923.
1125	2	1	28.2	23.4	20.2	18.2	14.2	10.4	8.3	6.5	4.9	4.0	388.8	38.	1017.

		2	26.0	21.8	18.9	17.1	13.4	10.0	8.0	6.3	4.8	3.9	136.1	-36.	1068.
		3	29.4	24.9	21.7	19.7	15.6	11.7	9.5	7.5	5.8	3.7	63.4	8.	992.
		4	27.5	23.2	20.1	18.2	14.4	10.6	8.3	6.5	5.1	5.4	41.6	47.	1089.
		5	30.5	26.2	22.6	20.5	16.4	12.3	9.8	7.5	5.6	4.8	20.8	-5.	816.
1100	2	1	18.3	15.0	12.9	11.9	9.2	6.8	5.4	4.2	3.2	2.6	526.2	-44.	751.
		2	24.8	20.8	18.1	16.5	12.8	9.4	7.6	5.9	4.5	3.6	212.2	13.	908.
		3	24.6	20.4	17.8	16.3	12.7	9.4	7.6	5.9	4.5	3.7	107.6	37.	910.
		4	27.2	22.6	19.7	18.3	14.3	10.6	8.7	6.7	5.3	4.2	48.4	-2.	690.
		5	24.6	20.3	17.8	16.4	12.7	9.4	7.6	5.9	4.5	3.8	29.4	-6.	630.
1075	2	1	14.9	12.3	10.8	9.7	7.6	5.7	4.6	3.6	2.7	2.2	1152.0	-10.	2410.
		2	15.3	12.6	11.0	9.9	7.8	5.8	4.7	3.6	2.8	2.2	250.1	38.	1570.
		3	20.6	17.2	15.0	13.7	10.7	7.7	6.2	4.6	3.2	2.4	86.3	-5.	1081.
		4	17.2	14.2	12.2	11.0	8.8	6.7	5.5	4.7	4.2	3.6	45.1	-3.	943.
		5	17.7	14.7	12.2	11.4	9.1	6.6	5.4	4.3	3.3	2.6	31.6	15.	990.
1050	2	1	10.8	8.8	7.8	7.0	5.6	4.3	3.5	2.8	2.2	1.8	537.5	22.	1205.
		2	19.9	16.6	14.7	13.3	10.4	7.6	6.0	4.7	3.6	2.8	153.8	-10.	1034.
		3	14.9	12.4	10.9	9.8	7.8	5.8	4.7	3.7	2.8	2.1	71.0	-5.	953.
		4	15.3	11.2	9.7	9.6	7.8	5.6	4.8	3.6	2.7	2.2	46.4	22.	1041.
1025	2	1	11.5	9.7	8.4	7.7	6.1	4.6	3.8	3.0	2.3	1.9	595.1	-22.	1245.
		2	12.0	10.1	8.7	7.9	6.2	4.7	3.8	3.0	2.2	1.8	184.2	-9.	1156.
		3	15.2	12.9	11.3	10.3	8.3	6.1	5.0	4.1	3.3	3.0	103.5	18.	1290.
		4	14.5	11.7	10.0	8.9	6.9	5.2	4.2	3.0	2.0	1.3	62.6	-16.	1310.
1000	2	1	11.5	9.7	8.3	7.6	6.1	4.6	3.8	3.1	2.4	2.0	660.9	-22.	902.
		2	16.5	13.7	12.0	10.9	8.6	6.3	5.1	4.0	3.1	2.5	298.7	20.	1223.
		3	16.6	13.9	12.1	10.9	8.7	6.5	5.3	4.1	3.0	2.5	178.5	-15.	1450.
		4	18.6	15.3	13.3	12.0	9.5	7.1	5.8	4.6	3.5	2.9	122.4	-4.	1670.
975	2	1	11.6	9.8	8.6	8.0	6.4	4.9	4.0	3.2	2.5	2.0	279.0	3.	730.
		2	16.5	13.3	11.7	10.6	8.3	6.2	5.1	4.0	3.0	2.5	138.7	-15.	1088.
		3	19.8	16.4	14.3	13.1	10.3	7.6	6.0	4.9	3.8	2.8	89.5	-5.	1402.
		4	22.7	18.6	16.2	14.8	11.7	8.6	7.1	5.4	4.1	3.7	81.8	14.	2139.
950	2	1	10.4	8.5	7.7	6.9	5.5	4.2	3.4	2.7	2.1	1.7	253.0	-12.	611.
		2	18.1	14.7	12.9	11.7	9.1	6.7	5.4	4.2	3.2	2.6	149.0	-9.	1079.
		3	21.5	17.4	15.6	14.0	11.1	8.3	6.7	5.3	4.2	3.5	128.3	15.	1850.
925	2	1	11.4	9.7	8.6	8.0	6.4	4.8	4.0	3.2	2.6	2.2	179.6	0.	512.
		2	18.3	15.0	13.0	11.8	9.3	6.9	5.5	4.3	3.3	2.7	129.0	11.	1104.
900	2	1	11.6	9.0	8.1	7.2	5.5	4.4	3.5	2.7	2.1	1.6	389.9	9.	720.

IPR-11 SPECTRAL ANALYSIS SUMMARY

LINE NO. : 1780

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
900	1	483.4	1264.0	8.3	188.69	.03	.20	-2000.00	-2000.000	1.58	-2000.00
925	1	581.7	1304.0	6.6	150.74	.03	.20	-2000.00	-2000.000	1.86	-2000.00
	2	199.4	1341.0	8.4	191.66	.03	.20	-2000.00	-2000.000	1.79	-2000.00
950	1	680.8	1187.0	4.5	116.57	.01	.20	-2000.00	-2000.000	2.21	-2000.00
	2	345.1	1806.0	6.9	158.75	.03	.20	-2000.00	-2000.000	1.48	-2000.00
	3	140.0	1460.0	8.1	184.39	.03	.20	-2000.00	-2000.000	1.74	-2000.00
975	1	605.9	905.0	4.0	92.30	.03	.20	-2000.00	-2000.000	2.46	-2000.00
	2	287.4	1289.0	5.2	134.74	.01	.20	-2000.00	-2000.000	1.12	-2000.00
	3	206.5	1840.0	6.9	144.59	.10	.20	-2000.00	-2000.000	1.09	-2000.00
	4	97.7	1460.0	7.7	174.31	.03	.20	-2000.00	-2000.000	1.25	-2000.00
1000	1	889.8	846.0	2.3	60.42	.01	.20	-2000.00	-2000.000	2.75	-2000.00
	2	390.9	1115.0	4.2	96.67	.03	.20	-2000.00	-2000.000	2.69	-2000.00
	3	250.2	1420.0	5.1	131.00	.01	.20	-2000.00	-2000.000	1.07	-2000.00
	4	210.8	2000.0	6.7	141.57	.10	.20	-2000.00	-2000.000	1.18	-2000.00
	5	109.6	1560.0	7.8	163.36	.10	.20	-2000.00	-2000.000	1.49	-2000.00
1025	1	492.8	1031.0	2.8	117.01	.01	.10	-2000.00	-2000.000	2.37	-2000.00
	2	124.6	782.0	4.3	69.84	.10	.30	-2000.00	-2000.000	1.73	-2000.00
	3	79.0	989.0	4.5	31.51	.30	.70	-2000.00	-2000.000	12.74	-2000.00
	4	58.8	1231.0	6.1	144.70	100.00	.20	-2000.00	-2000.000	11.98	-2000.00
	5	56.0	1756.0	7.1	149.81	.10	.20	-2000.00	-2000.000	1.01	-2000.00
1050	1	779.3	1287.0	3.5	57.03	.10	.30	-2000.00	-2000.000	3.21	-2000.00
	2	202.8	1005.0	3.8	98.65	.01	.20	-2000.00	-2000.000	1.54	-2000.00
	3	83.6	827.0	4.9	125.82	.01	.20	-2000.00	-2000.000	2.31	-2000.00
	4	61.1	1009.0	5.4	141.92	.01	.20	-2000.00	-2000.000	1.34	-2000.00
	5	48.9	1212.0	6.4	136.29	.10	.20	-2000.00	-2000.000	1.78	-2000.00
1075	1	656.6	1718.0	4.6	107.42	.03	.20	-2000.00	-2000.000	2.31	-2000.00
	2	224.0	1758.0	6.2	156.23	.01	.20	-2000.00	-2000.000	1.50	-2000.00
	3	67.2	1052.0	5.6	118.74	.10	.20	-2000.00	-2000.000	1.20	-2000.00
	4	30.8	806.0	6.4	247.61	.03	.10	-2000.00	-2000.000	1.34	-2000.00
	5	23.7	931.0	6.9	156.56	.03	.20	-2000.00	-2000.000	1.56	-2000.00
1100	1	500.3	1122.0	9.0	308.70	100.00	.10	-2000.00	-2000.000	1.30	-2000.00
	2	156.6	1053.0	8.6	319.70	.03	.10	-2000.00	-2000.000	1.09	-2000.00
	3	87.7	1177.0	9.7	354.91	.03	.10	-2000.00	-2000.000	.86	-2000.00
	4	31.0	695.0	9.0	315.05	1.00	.10	-2000.00	-2000.000	1.46	-2000.00
	5	16.9	567.0	10.2	337.30	3.00	.10	-2000.00	-2000.000	1.79	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters M-IP	TAU-IP	C-IP	M-EM	TAU-EM	Fit/IP	Fit/EM
1125	1	187.1	451.0	21.6	352.28	10.00	.20	-2000.00	-2000.000	.82	-2000.00
	2	121.3	878.0	19.9	559.52	100.00	.10	-2000.00	-2000.000	.70	-2000.00
	3	44.7	646.0	15.0	356.43	.01	.20	-2000.00	-2000.000	1.94	-2000.00
	4	31.9	771.0	18.0	244.25	30.00	.30	-2000.00	-2000.000	3.81	-2000.00
	5	13.3	481.0	12.6	277.62	.03	.20	-2000.00	-2000.000	2.45	-2000.00
1150	1	864.2	2261.0	5.5	205.31	100.00	.10	-2000.00	-2000.000	1.62	-2000.00
	2	76.2	598.3	19.4	548.14	30.00	.10	-2000.00	-2000.000	.57	-2000.00
	3	58.0	908.0	18.0	526.65	30.00	.10	-2000.00	-2000.000	1.07	-2000.00
	4	24.3	634.0	16.1	291.09	.30	.20	-2000.00	-2000.000	1.66	-2000.00
	5	18.4	722.0	14.6	271.61	.30	.20	-2000.00	-2000.000	.91	-2000.00
1175	1	796.1	1666.0	3.9	159.41	.01	.10	-2000.00	-2000.000	2.31	-2000.00
	2	373.9	2348.0	6.7	242.57	1.00	.10	-2000.00	-2000.000	1.31	-2000.00
	3	54.5	683.0	17.8	304.07	1.00	.20	-2000.00	-2000.000	1.17	-2000.00
	4	43.7	914.0	16.9	503.62	100.00	.10	-2000.00	-2000.000	1.96	-2000.00
	5	19.3	606.0	17.1	488.82	100.00	.10	-2000.00	-2000.000	3.32	-2000.00
1200	1	848.1	986.0	4.3	171.66	.03	.10	-2000.00	-2000.000	1.41	-2000.00
	2	564.9	1970.0	4.1	86.44	.10	.20	-2000.00	-2000.000	1.35	-2000.00
	3	308.9	2150.0	6.1	85.22	.30	.30	-2000.00	-2000.000	.90	-2000.00
	4	55.0	639.0	21.8	274.29	30.00	.30	-2000.00	-2000.000	3.24	-2000.00
	5	45.4	791.0	16.5	493.83	10.00	.10	-2000.00	-2000.000	.94	-2000.00

IPR-11 DATA SUMMARY

SURVEY : MINNOVA - MT. SICKER PROPERTY

INDEX FILE : L-1780W.IND
DATA FILE : L-1780W.DAT

LINE NO. : 1780

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1200	2	1	16.7	13.8	12.3	11.2	8.8	6.7	5.5	4.3	3.4	2.7	848.1	-58.	986.
		2	16.1	13.4	11.9	10.8	8.4	6.3	5.1	4.1	3.1	2.5	564.9	-91.	1970.
		3	24.2	20.4	18.3	16.6	13.1	9.8	7.9	6.1	4.6	3.8	308.9	-10.	2150.
		4	66.8	57.6	51.8	47.6	38.9	30.7	25.8	21.8	17.9	14.8	55.0	106.	639.
		5	58.9	50.8	46.1	42.0	32.8	25.7	20.9	16.5	12.7	10.5	45.4	10.	791.
1175	2	1	15.6	12.4	11.1	10.1	7.9	6.0	4.9	3.9	3.0	2.4	796.1	-111.	1666.
		2	25.3	20.8	18.9	17.2	13.7	10.3	8.5	6.7	5.3	4.3	373.9	-21.	2348.
		3	64.6	54.8	49.4	45.1	36.4	27.2	22.1	17.8	13.7	10.8	54.5	116.	683.
		4	61.2	51.1	46.0	41.8	33.6	25.9	21.5	16.9	13.8	11.2	43.7	20.	914.
		5	58.5	49.2	44.2	39.8	33.7	24.4	19.7	17.1	12.4	11.1	19.3	6.	606.
1150	2	1	20.1	16.8	15.1	13.5	11.0	8.4	6.9	5.5	4.4	3.6	864.2	-46.	2261.
		2	68.4	58.7	52.7	48.3	38.9	29.7	24.5	19.4	15.0	12.3	76.2	111.	598.
		3	65.3	55.7	50.0	45.8	36.5	27.6	22.7	18.0	14.2	11.9	58.0	37.	908.
		4	59.2	50.6	45.3	42.0	32.8	24.6	20.1	16.1	12.6	9.6	24.3	12.	634.
		5	54.9	47.0	42.1	39.2	30.4	22.8	18.4	14.6	11.3	9.2	18.4	-2.	722.
1125	2	1	72.3	63.0	57.1	52.6	42.2	32.6	26.9	21.6	17.1	14.1	187.1	81.	451.
		2	70.9	61.0	54.1	49.6	39.8	30.5	25.1	19.9	15.7	12.8	121.3	24.	878.
		3	59.9	51.1	45.2	41.0	32.4	23.8	19.1	15.0	11.5	8.6	44.7	26.	646.
		4	58.7	50.8	45.3	41.4	33.8	27.1	22.6	18.0	15.5	12.8	31.9	14.	771.
		5	51.0	43.5	37.0	34.6	27.3	19.8	15.6	12.6	10.1	7.6	13.3	-22.	481.
1100	2	1	32.3	26.9	24.3	22.2	17.8	13.6	11.2	9.0	7.1	5.8	500.3	14.	1122.
		2	33.1	27.4	24.5	22.2	17.7	13.3	10.9	8.6	6.7	5.4	156.6	6.	1053.
		3	37.2	31.0	27.7	25.1	20.0	15.1	12.3	9.7	7.5	6.1	87.7	28.	1177.
		4	34.4	28.5	25.6	23.1	18.5	14.0	11.4	9.0	7.1	5.9	31.0	-2.	695.
		5	37.4	31.1	27.8	25.1	20.0	15.1	12.7	10.2	7.9	6.3	16.9	-6.	567.
1075	2	1	19.5	15.6	13.6	12.6	9.7	7.2	5.9	4.6	3.5	2.9	656.6	-4.	1718.

		2	25.8	21.4	18.8	16.9	13.3	9.7	7.6	6.2	4.7	3.7	224.0	13.	1758.
		3	22.5	18.6	16.5	15.0	11.8	8.8	7.1	5.6	4.3	3.5	67.2	5.	1052.
		4	24.9	20.7	18.5	16.7	13.2	9.9	8.1	6.4	5.0	4.1	30.8	9.	806.
		5	28.4	23.4	20.8	18.8	14.7	10.8	8.5	6.9	5.1	4.2	23.7	-2.	931.
1050	2	1	15.9	13.0	10.9	10.1	7.8	5.7	4.9	3.5	2.6	2.1	779.3	-2.	1287.
		2	16.1	13.5	11.4	10.6	8.2	6.0	4.9	3.8	2.9	2.3	202.8	-10.	1005.
		3	20.9	17.3	14.8	13.5	10.4	7.6	6.1	4.9	3.8	3.0	83.6	20.	827.
		4	23.3	19.5	16.7	15.4	12.0	8.9	7.1	5.4	4.2	3.4	61.1	10.	1009.
		5	26.3	22.0	18.9	17.3	13.6	10.2	8.2	6.4	5.0	4.0	48.9	-15.	1212.
1025	2	1	11.1	9.3	8.0	7.2	5.7	4.4	3.5	2.8	2.2	1.7	492.8	-20.	1031.
		2	19.1	16.1	13.9	12.5	9.6	7.0	5.6	4.3	3.3	2.6	124.6	9.	782.
		3	19.8	16.3	14.2	12.7	9.8	7.2	6.6	4.5	2.4	1.6	79.0	23.	989.
		4	23.9	20.2	17.7	16.1	12.7	9.5	6.5	6.1	6.1	5.4	58.8	-11.	1231.
		5	28.3	23.9	21.0	19.1	15.0	11.3	9.1	7.1	5.5	4.5	56.0	-1.	1756.
1000	2	1	10.0	8.1	6.9	6.2	4.9	3.6	3.0	2.3	1.8	1.4	889.8	-11.	846.
		2	17.5	14.4	12.5	11.2	8.8	6.4	5.3	4.2	3.0	2.6	390.9	10.	1115.
		3	21.5	17.9	15.6	14.0	11.1	8.1	6.6	5.1	3.8	3.1	250.2	3.	1420.
		4	27.0	22.7	19.9	18.0	14.3	10.6	8.6	6.7	5.1	4.2	210.8	8.	2000.
		5	31.7	26.3	23.0	20.8	16.5	12.3	10.0	7.8	6.0	4.9	109.6	-5.	1560.
975	2	1	16.6	13.4	11.7	10.5	8.3	6.2	5.0	4.0	3.1	2.4	605.9	-3.	905.
		2	22.2	18.4	16.1	14.5	11.3	8.3	6.7	5.2	4.0	3.2	287.4	-4.	1289.
		3	27.5	22.9	20.3	18.3	14.5	10.8	8.8	6.9	5.3	4.3	206.5	17.	1840.
		4	31.2	25.9	22.8	20.6	16.3	12.1	9.8	7.7	5.9	4.7	97.7	2.	1460.
950	2	1	19.5	16.0	13.8	12.2	9.6	7.1	5.8	4.5	3.4	2.8	680.8	-23.	1187.
		2	28.7	23.8	20.7	18.6	14.7	11.0	8.8	6.9	5.3	4.3	345.1	4.	1806.
		3	33.5	27.9	24.3	21.7	17.2	12.7	10.3	8.1	6.2	5.1	140.0	14.	1460.
925	2	1	27.3	22.4	19.4	17.6	13.9	10.3	8.4	6.6	5.0	4.1	581.7	-10.	1304.
		2	35.1	28.9	25.1	22.8	17.9	13.3	10.7	8.4	6.5	5.3	199.4	16.	1341.
900	2	1	34.3	28.2	25.0	22.4	17.6	13.1	10.5	8.3	6.4	5.2	483.4	10.	1264.

MINNOVA INC.

MT. SICKER PROPERTY

LINE NUMBER: 1300

"A": 25.0 METRES N=1 TO 5

SCINTREX IPR-11 RECEIVER TX PULSE TIME: 2.0 SEC

POLE-DIPOLE ARRAY RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

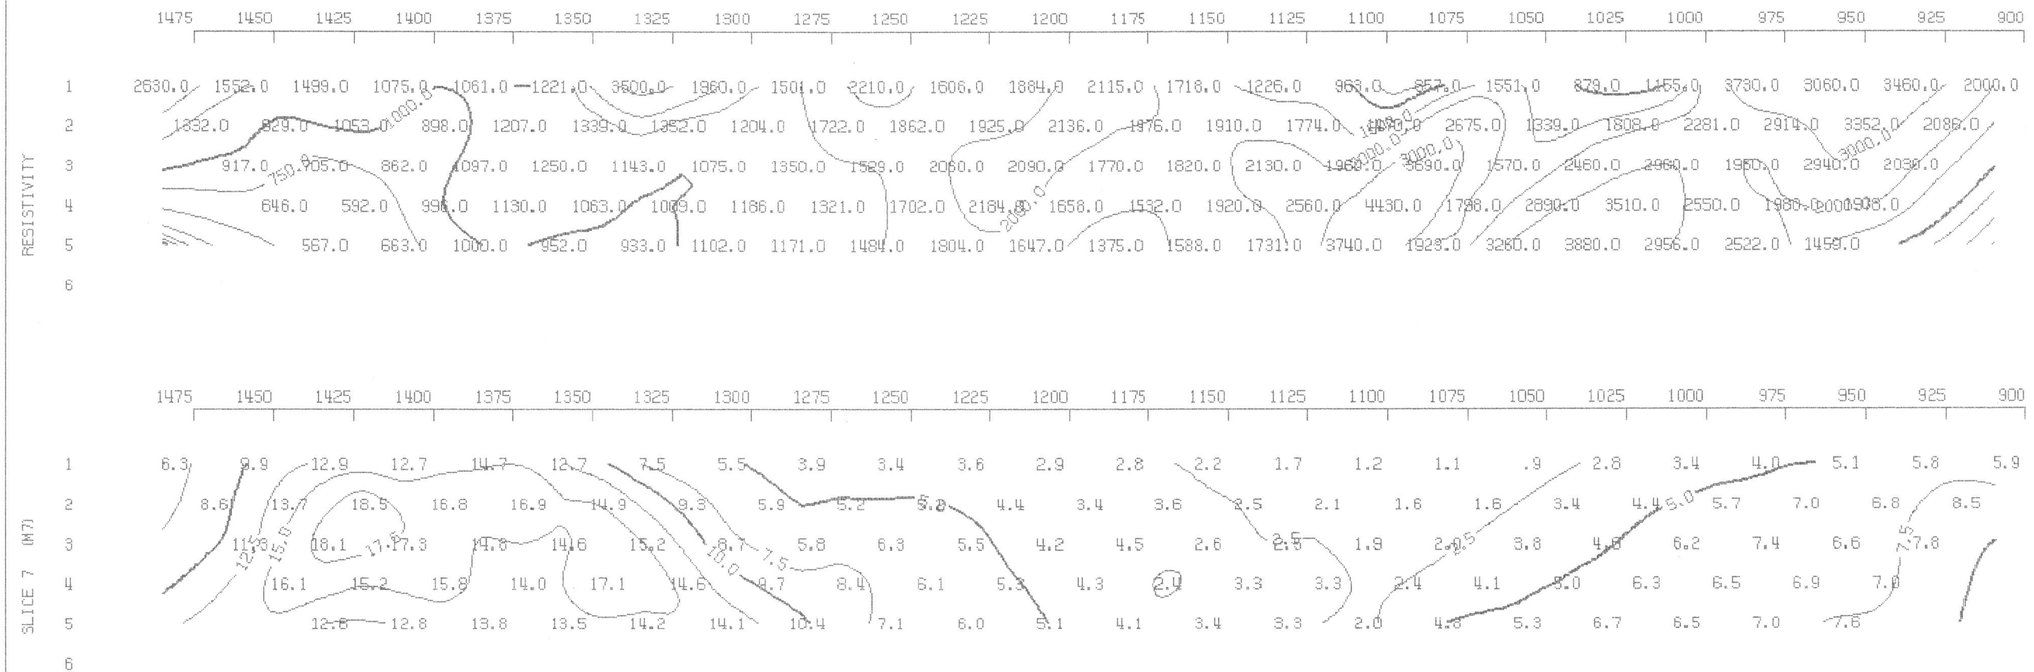



MINNOVA INC.

MT. SICKER PROPERTY

LINE NUMBER: 1400

"A": 25.0 METRES

N=1 TO 5

SCINTREX IPR-11 RECEIVER

POLE-DIPOLE ARRAY

TX PULSE TIME: 2.0 SEC

RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

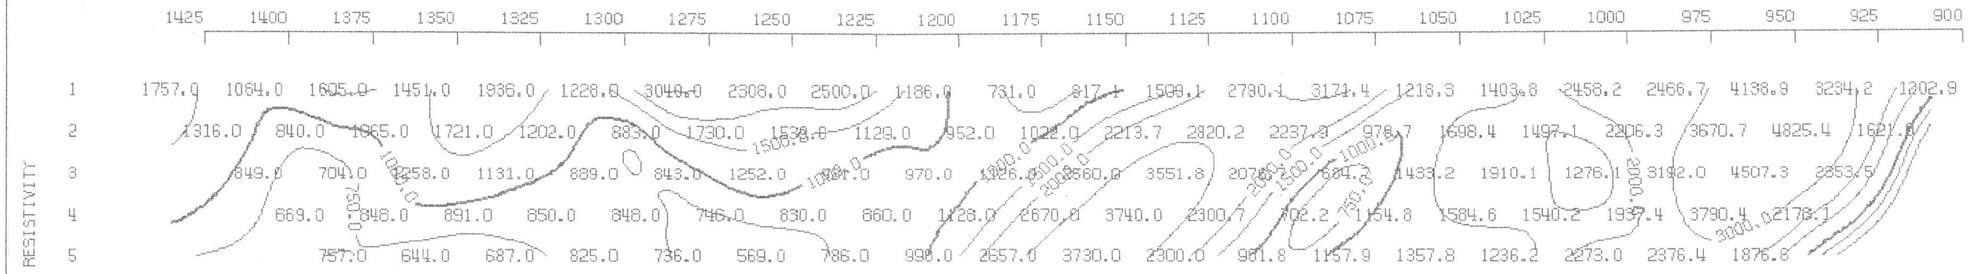

inches

0 1

0 1 2

centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

MINNOVA INC.

MT. SICKER PROPERTY

LINE NUMBER: 1500

"A": 25.0 METRES

N=1 TO 5

SCINTREX IPR-11 RECEIVER

POLE-DIPOLE ARRAY

TX PULSE TIME: 2.0 SEC

RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

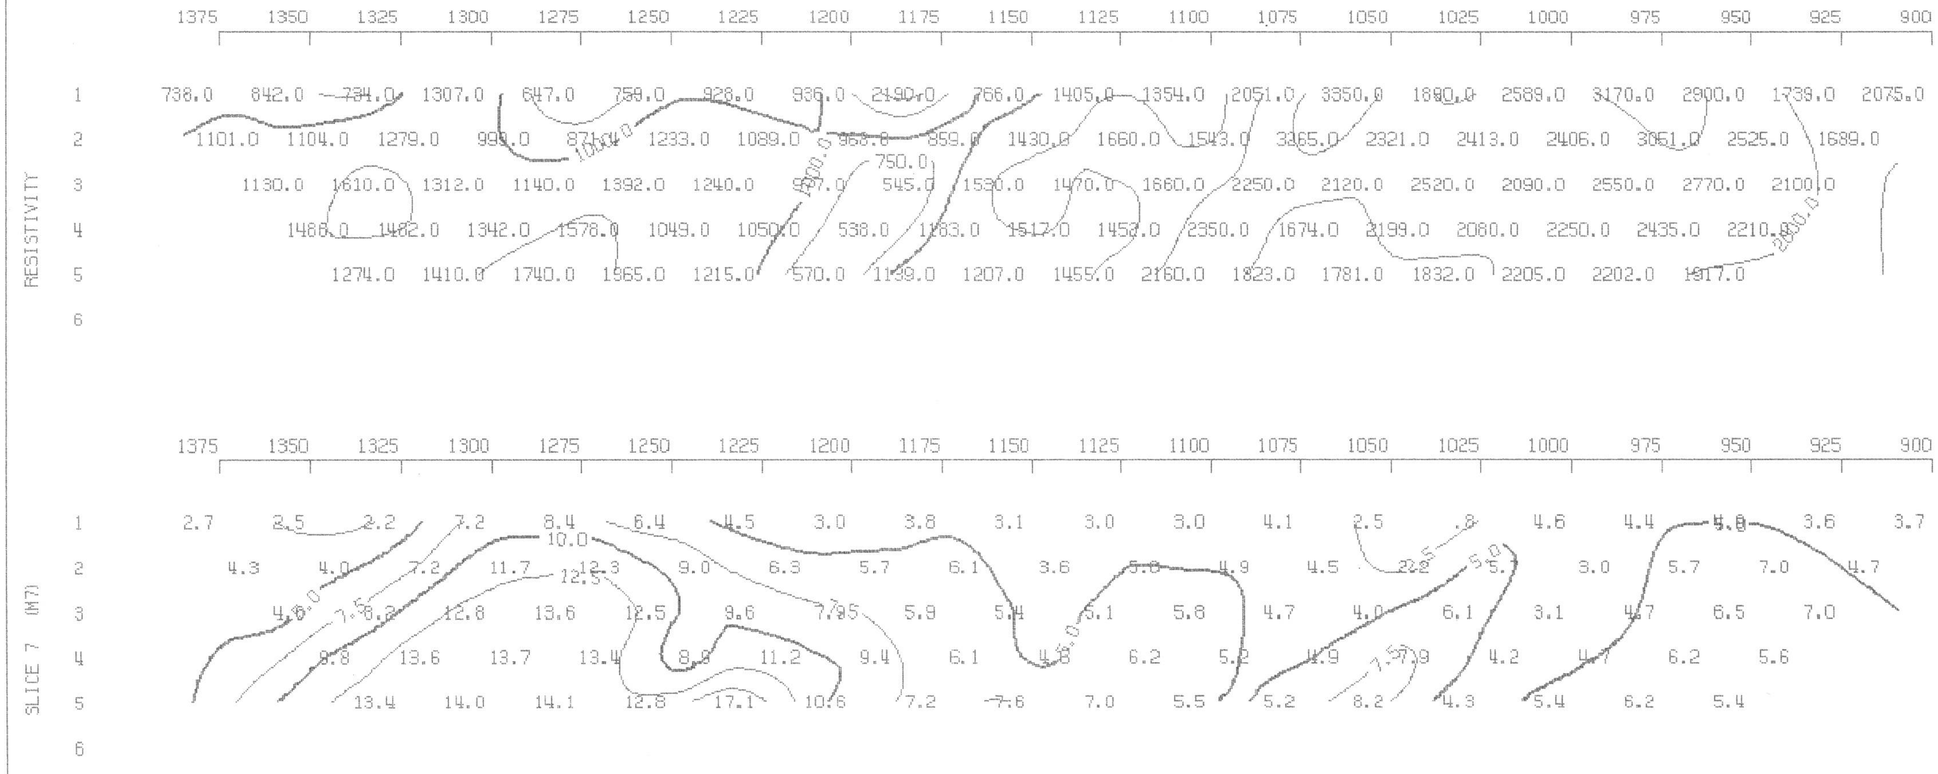

inches

0 1

0 1 2

centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

MINNOVA INC.

MT. SICKER PROPERTY

LINE NUMBER: 1600

"A": 25.0 METRES

N=1 TO 5

SCINTREX IPR-11 RECEIVER

POLE-DIPOLE ARRAY

TX PULSE TIME: 2.0 SEC

RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

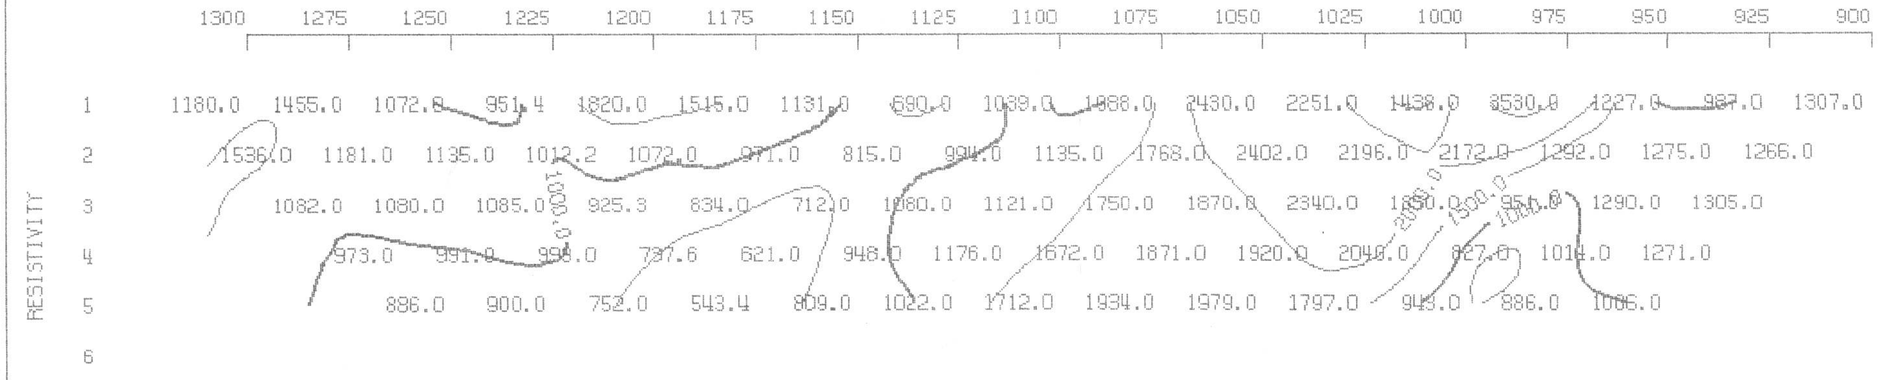

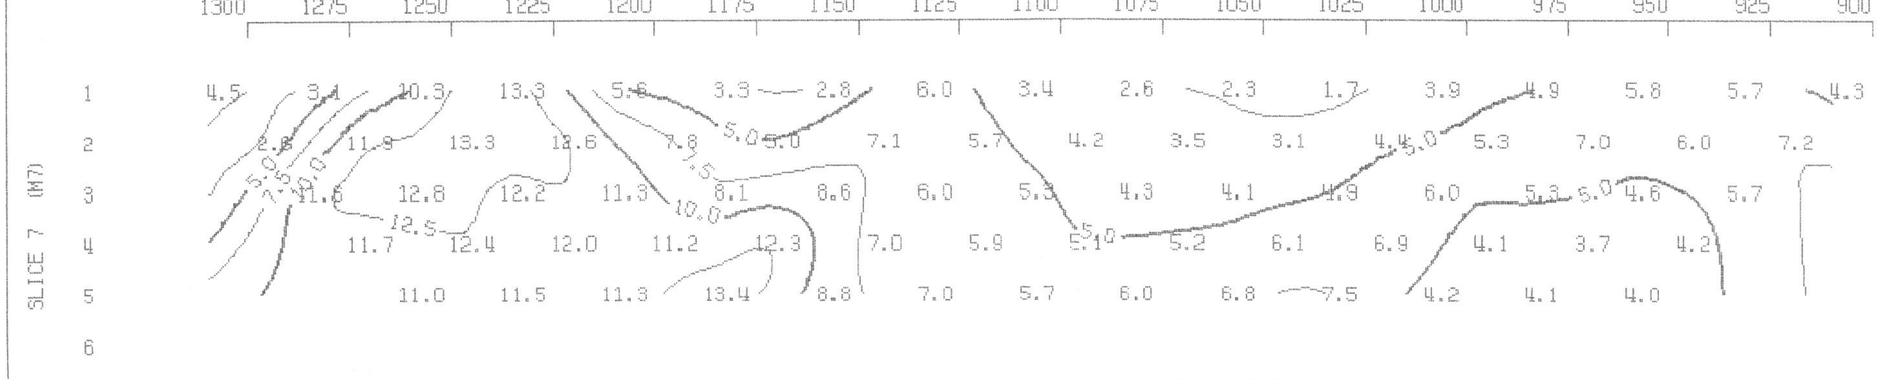

inches

0 1

0 1 2

centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

MINNOVA INC.

MT. SICKER PROPERTY

LINE NUMBER: 1700

"A": 25.0 METRES

N=1 TO 5

SCINTREX IPR-11 RECEIVER

POLE-DIPOLE ARRAY

TX PULSE TIME: 2.0 SEC

RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

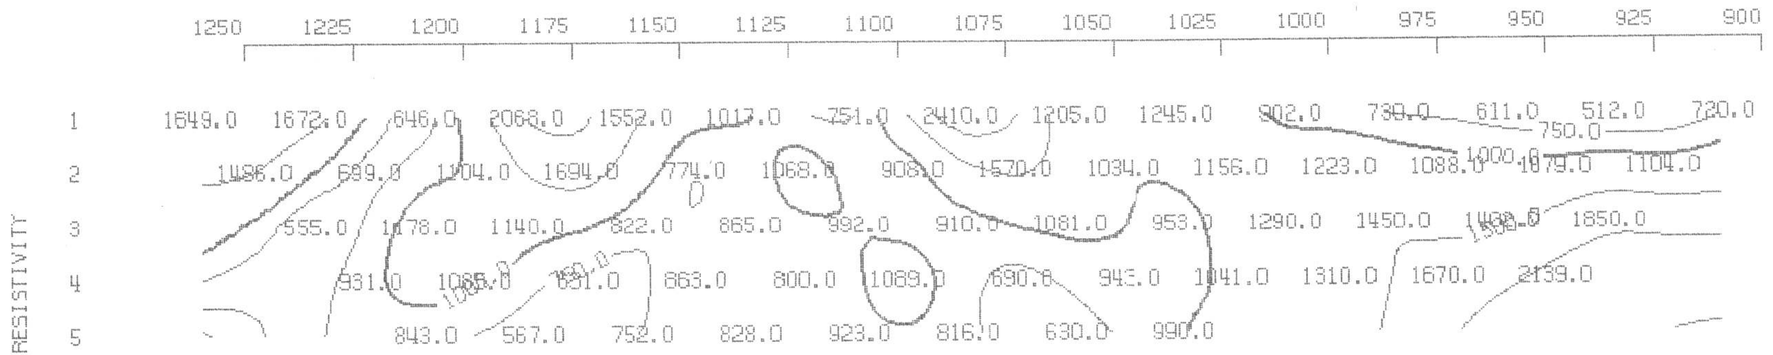

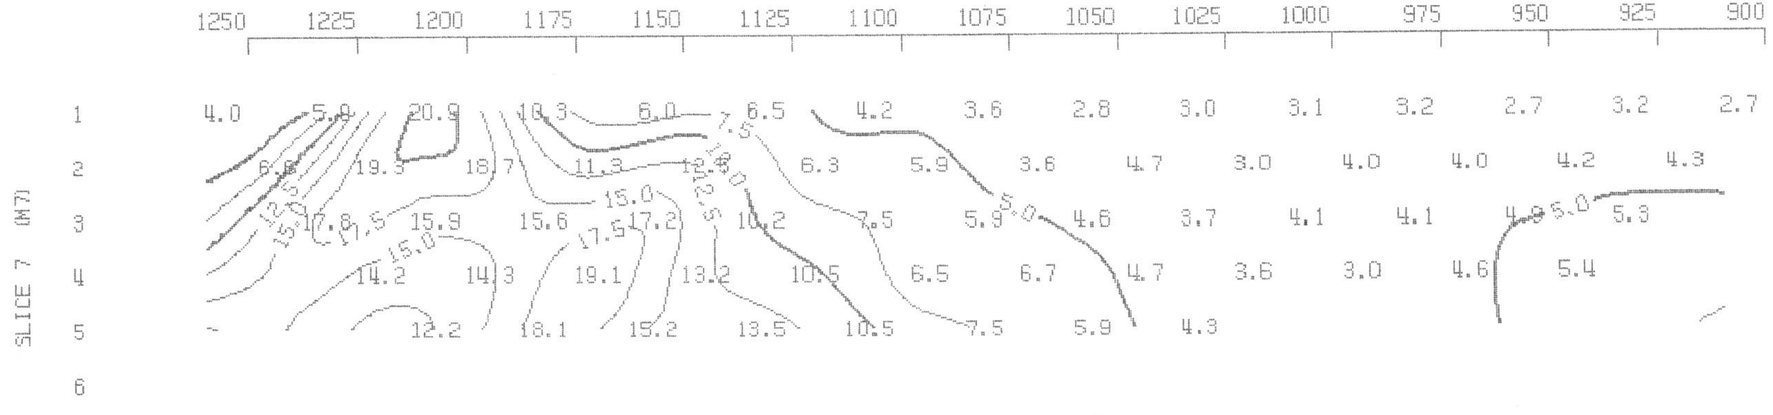

inches

0 1

0 1 2

centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

MINNOVA INC.

MT. SICKER PROPERTY

LINE NUMBER: 1780

"A": 25.0 METRES

N=1 TO 5

SCINTREX IPR-11 RECEIVER

POLE-DIPOLE ARRAY

TX PULSE TIME: 2.0 SEC

RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

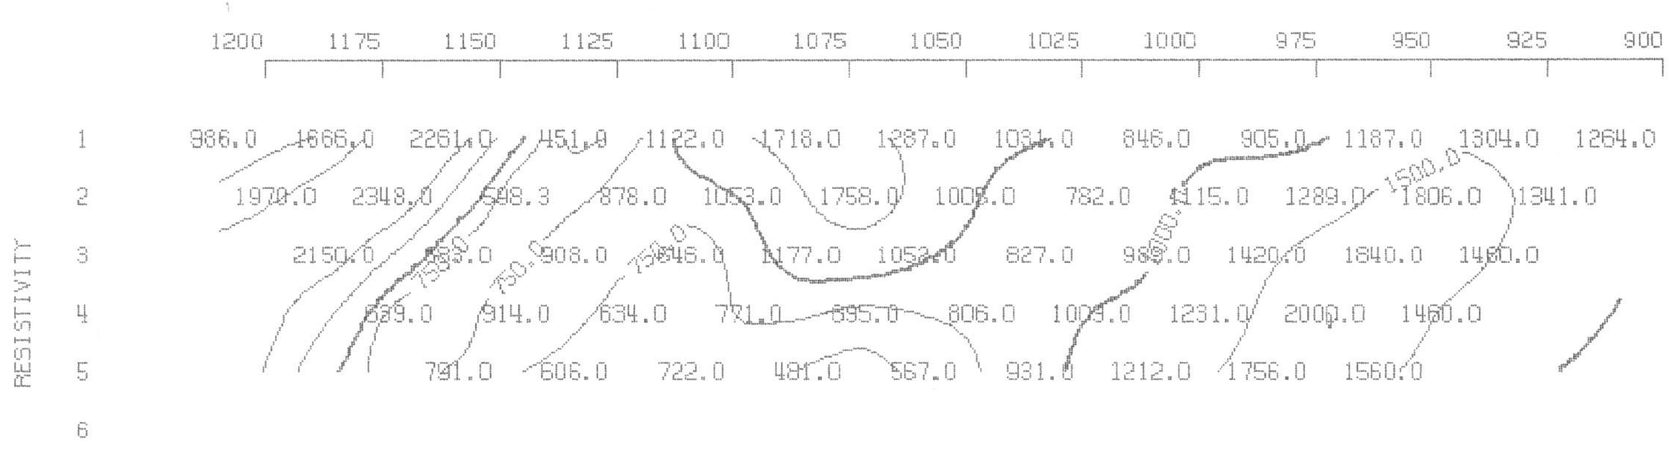

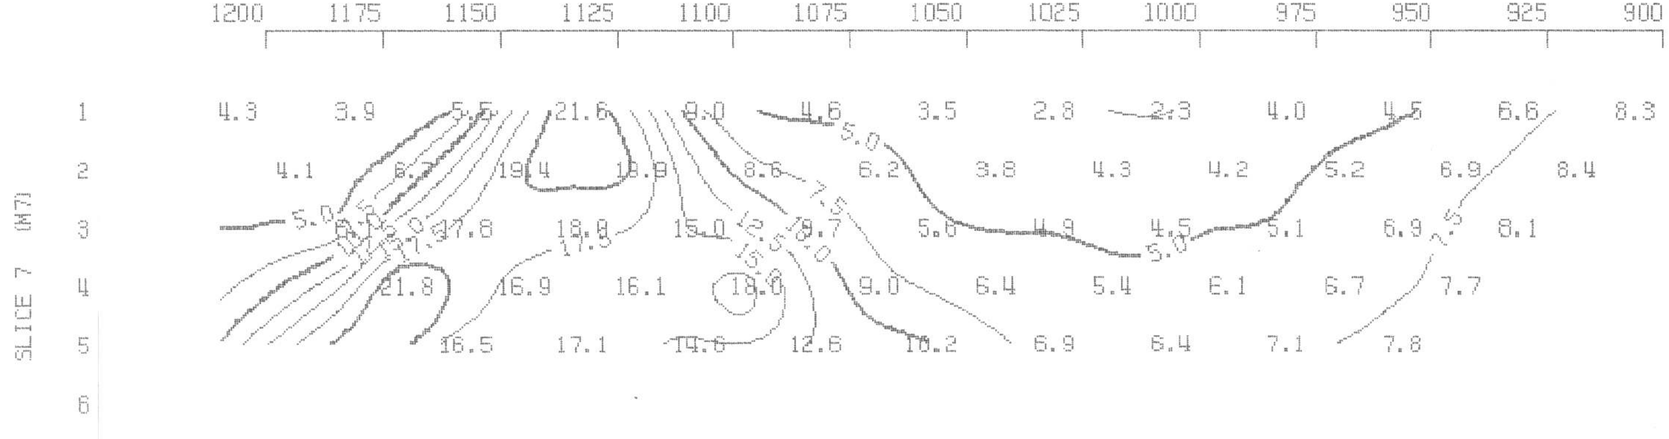

inches

0 1

0 1 2

centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.