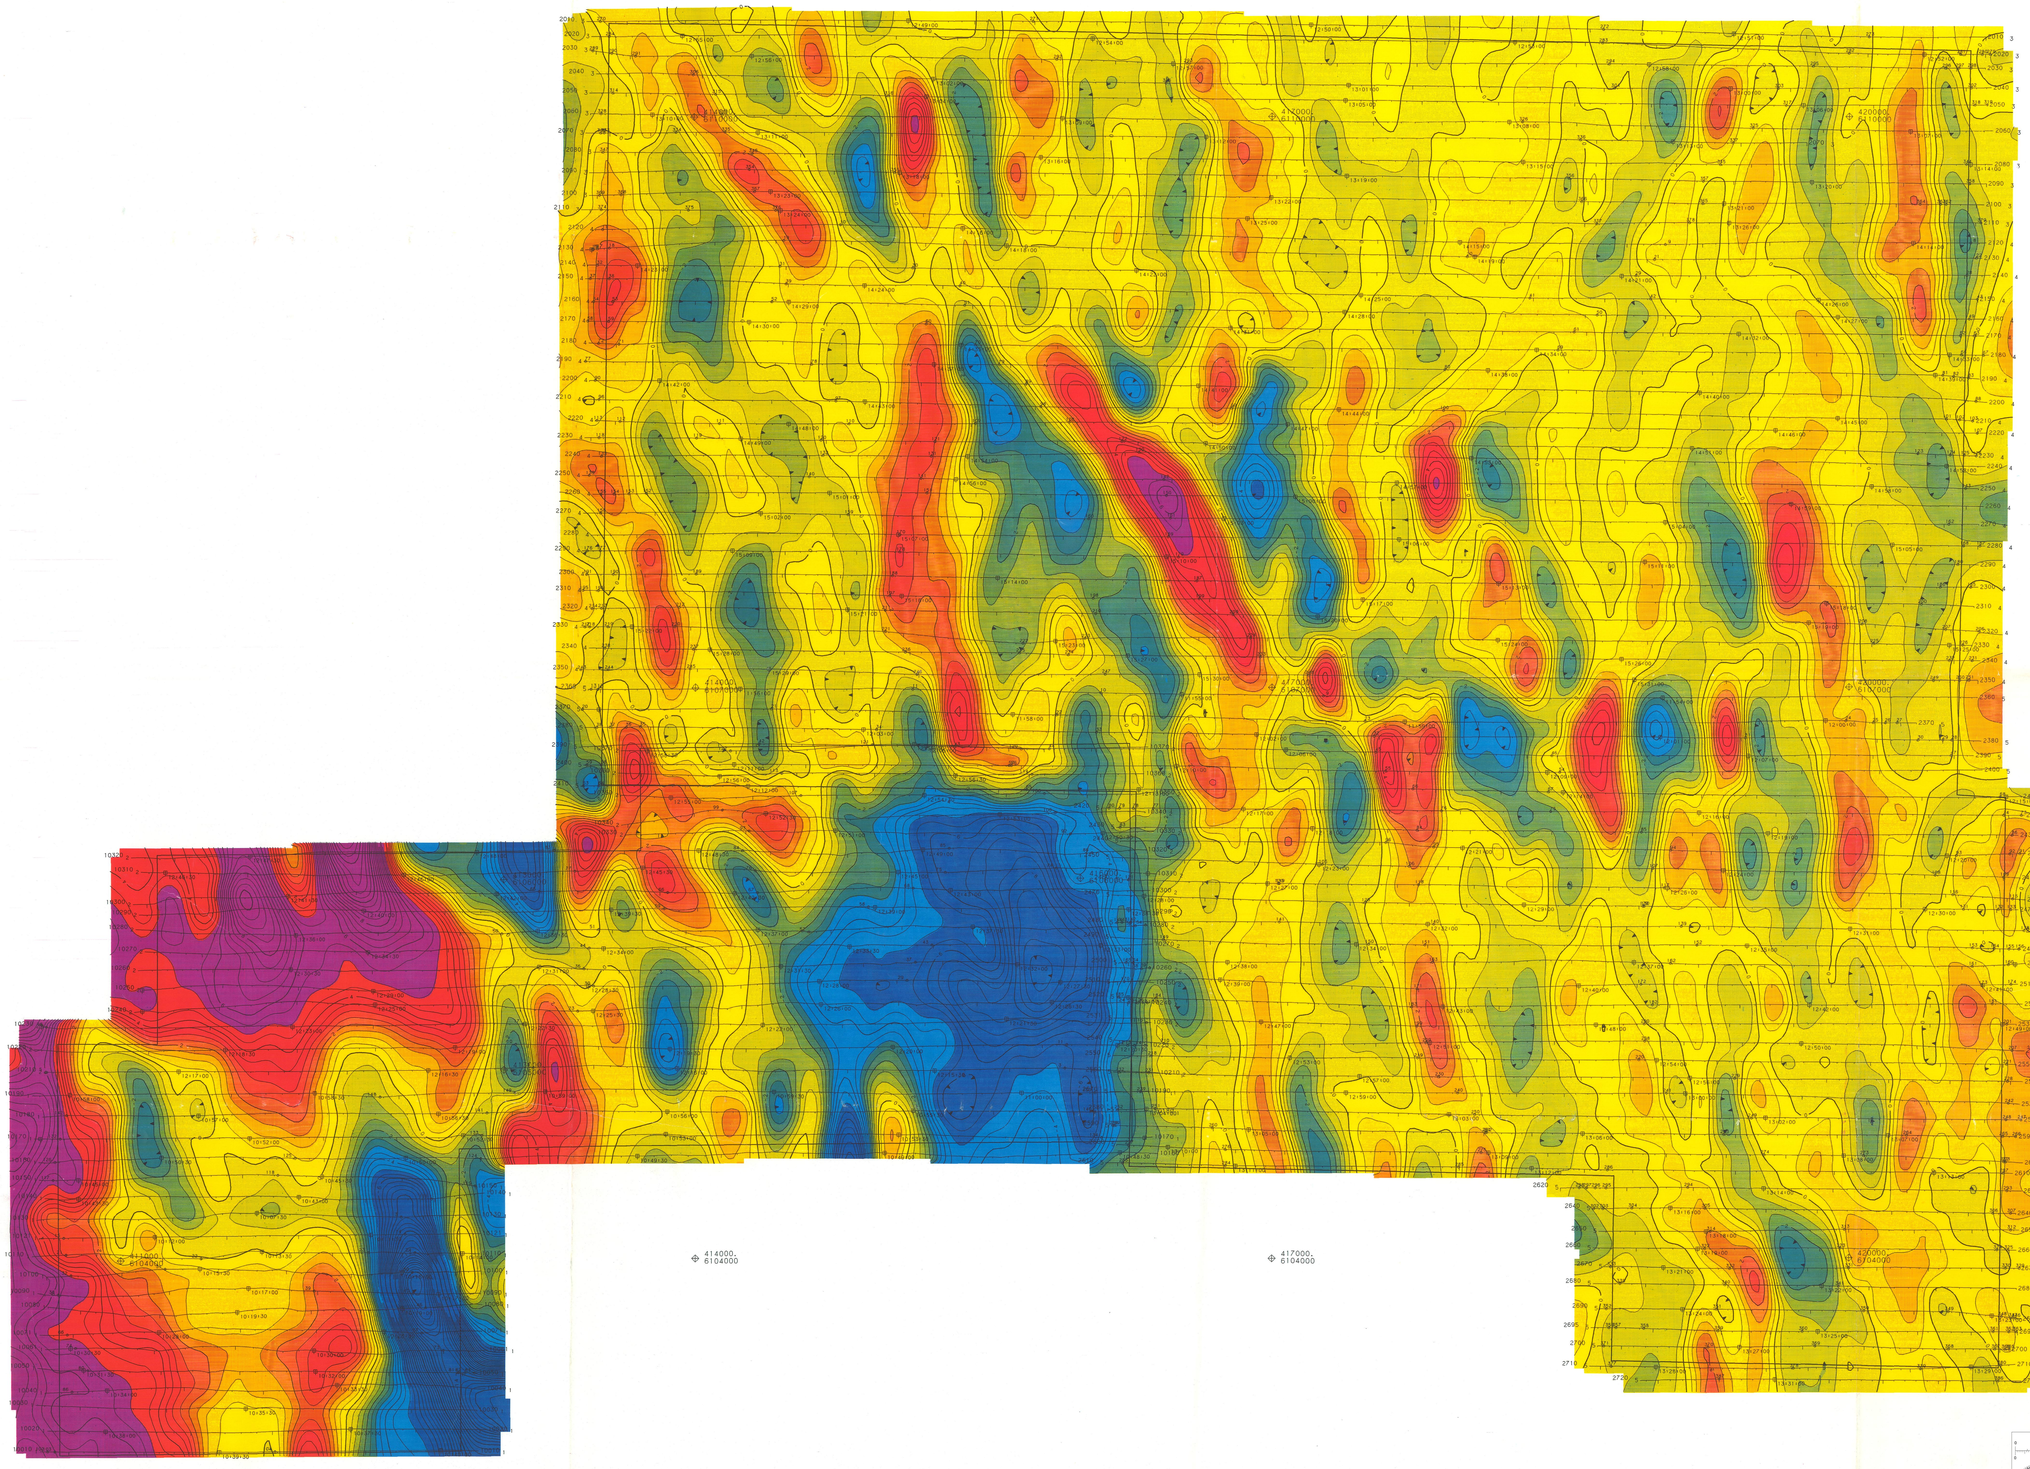

N

Flight Path

Navigation and recovery using a Motorola Mini-Ranger (MRS III) navigation system.

Average terrain clearance 60m
Average line spacing 100m

VLF-EM Profiles

VLF Total Field Intensity
Station: NSS Annapolis, Maryland (21.4kHz)

SCALE: 2.5 percent/mm

Map contours are multiples of those listed below

- 0.5 %
- 2 %
- 10 %
- 50 %

20.00
5.00
3.00
2.50
2.00
1.50
1.00
0.50
0.00
-0.50
-1.00
-1.50
-2.00
-2.50
-3.00
-5.00
-20.00

NICHOLSON AND ASSOCIATES

VLF-EM TOTAL FIELD CONTOURS

WE AND WEBB PROPERTIES

BRITISH COLUMBIA

SCALE 1:10,000

0 330 660 1320 2640 Feet

0 100 200 500 1000 Metres

AERODAT LIMITED

DATE:	AUGUST 1990
NTS No:	93 N/1
MAP No:	3
	J9044 - 1

inches
0 1 2 3 4 5
centimetres

This reference scale for measuring distances on the map or chart can be used only on the image. Distances will be proportional to those on the original size.

830212