

674000 E

676000 E

678000 E

6132000 N

6130000 N

6128000 N



6126000 N

6132000 N

6130000 N

6128000 N

6126000 N

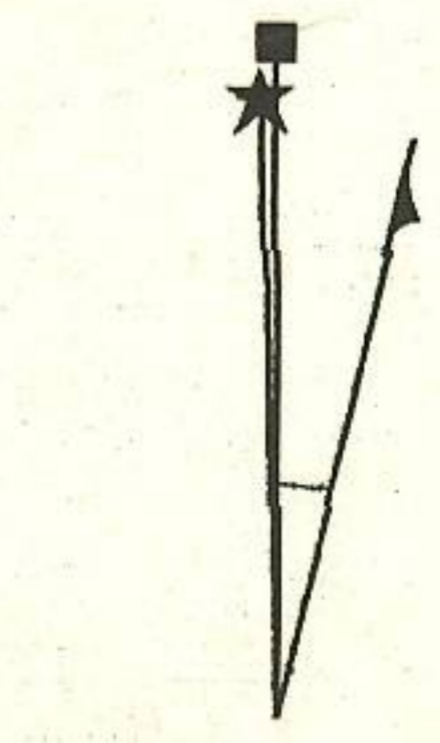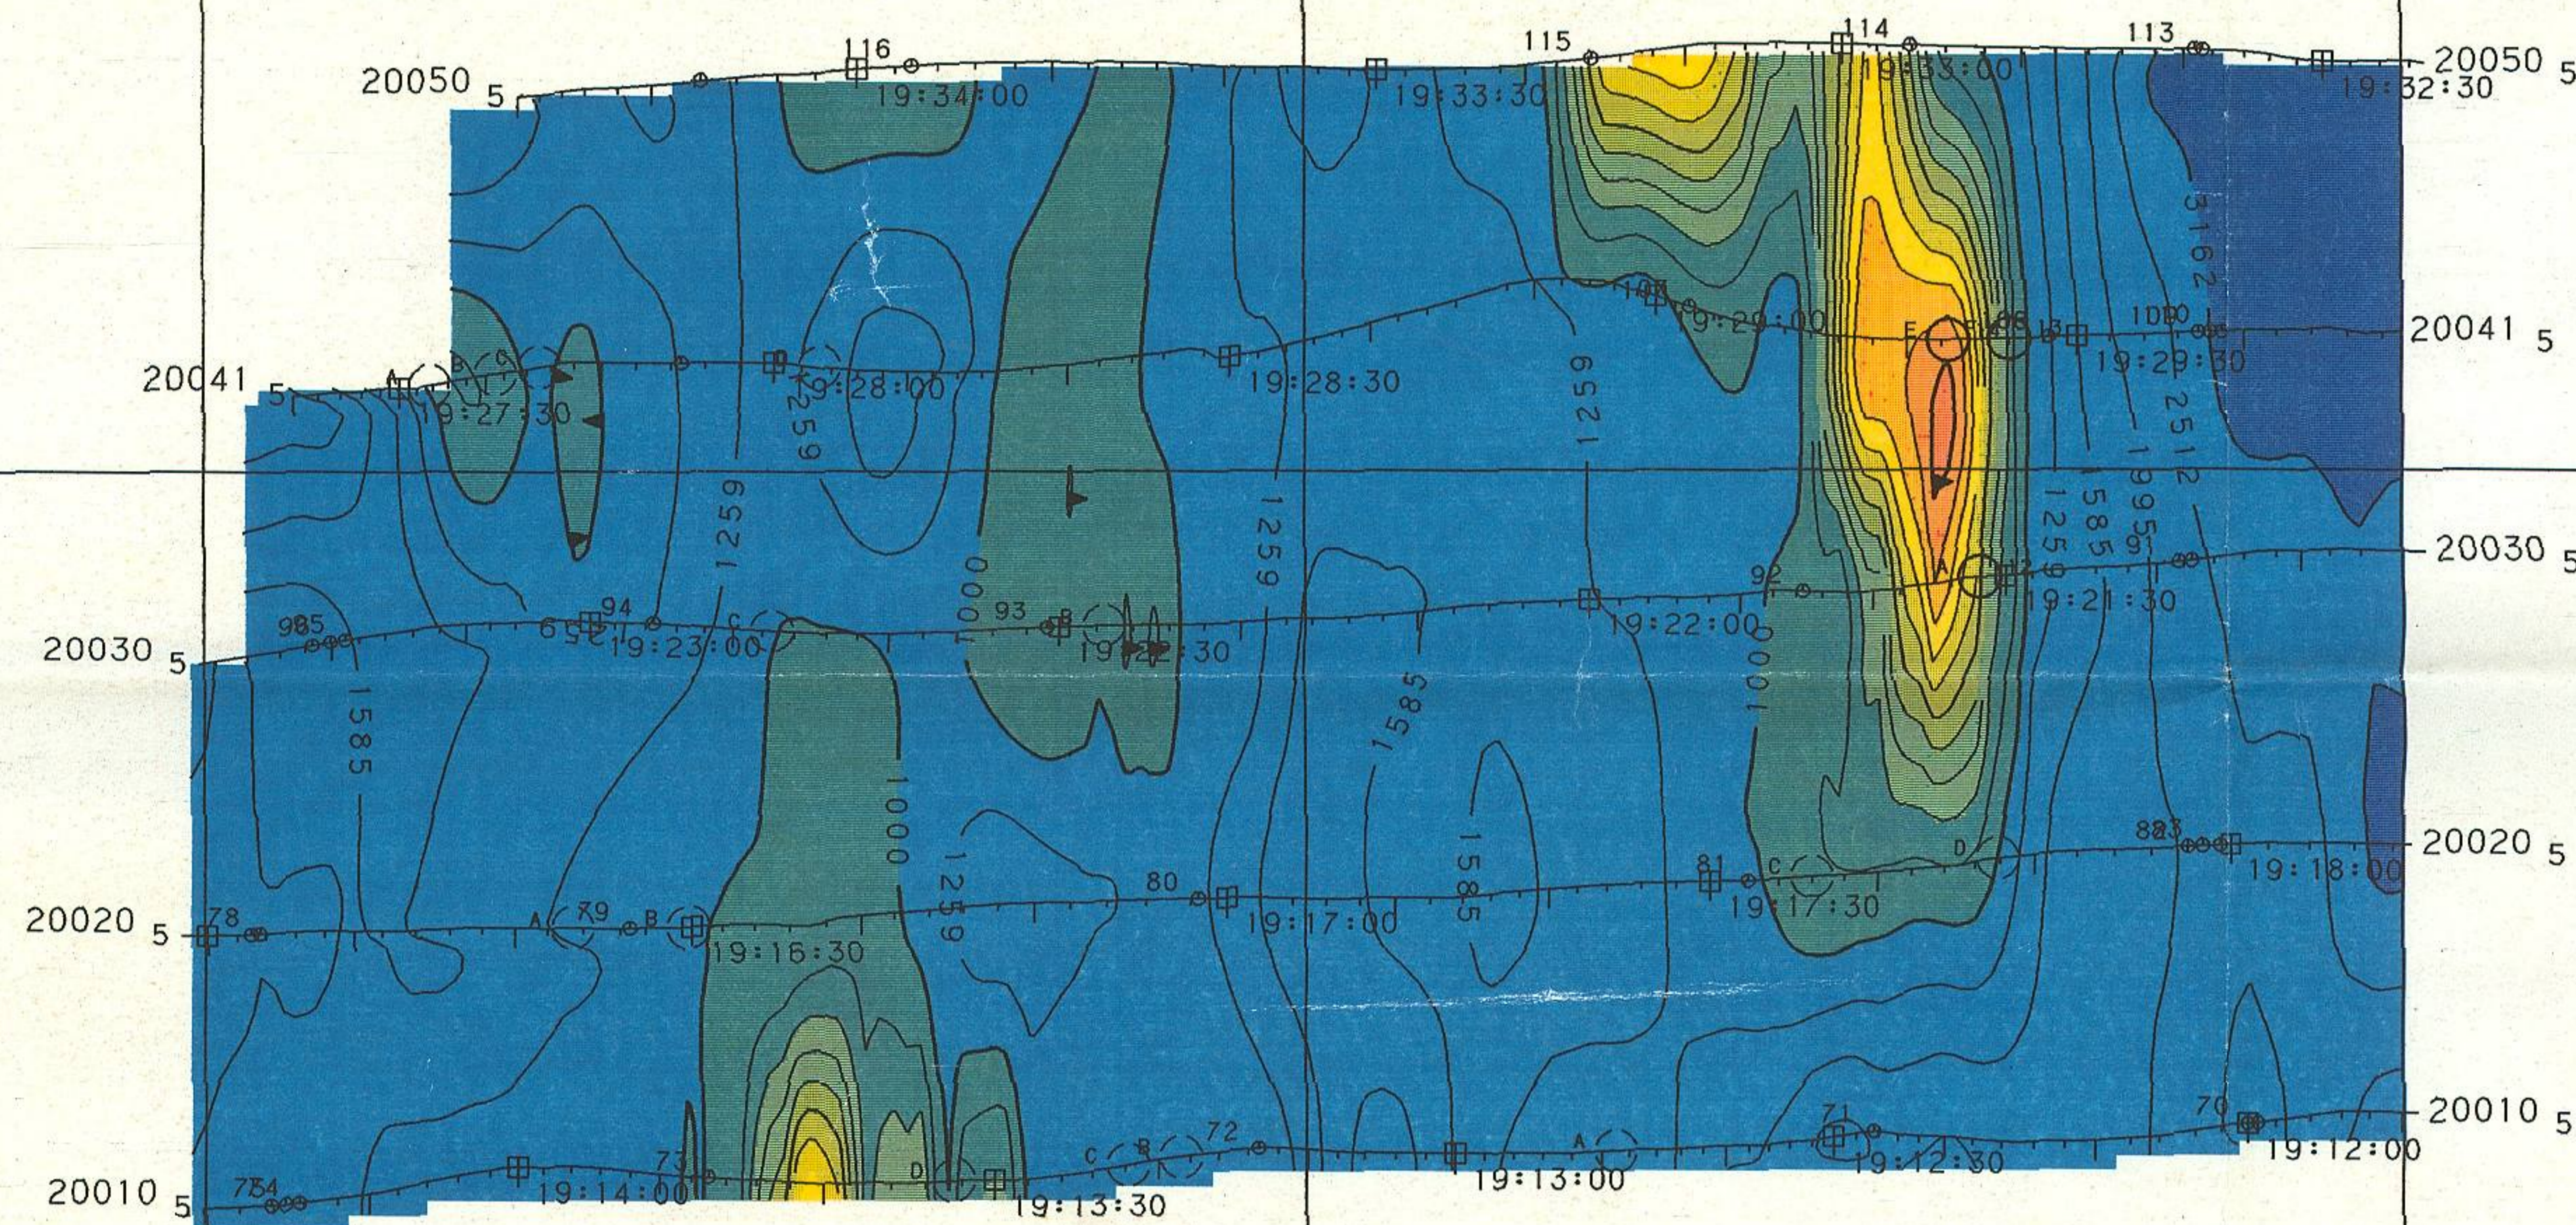

Square: Grid North
 Star: True North
 Arrow: Magnetic North

Angles presented are approximate mean deviations for centre of NTS sheet. Use diagram for reference only.

Grid North - True North: -1.4°
 Grid North - Magnetic North: 13.8°
 Annual change: -0.27° from 1980

APPARENT RESISTIVITY

Apparent resistivity calculated from the measured 800 Hz coplanar EM response, assuming a resistive half-space (200m) model. Average sensor elevation was 30m.

Map contours are in ohm-m, at logarithmic intervals, in multiples of those listed below:

- 0.1 log(ohm-m)
- 0.5 log(ohm-m)
- 2.0 log(ohm-m)



EM ANOMALIES

EM anomalies selected by computer algorithm and manually confirmed. Selection is based on the response correlation to theoretical sources such as a steeply dipping conductor.

Calculation of conductance is based on the response of the 4600 Hz coaxial data, and forms the basis for anomaly classification.

Letter codes are used to identify individual anomalies on a line, and the inphase amplitude of the 4600 Hz response is annotated opposite.

- A_C 0 - 1 mhos
- 1 - 2 mhos
- ⊕ 2 - 4 mhos
- ⊙ 4 - 8 mhos
- 8 - 16 mhos
- 16 - 32 mhos
- > 32 mhos

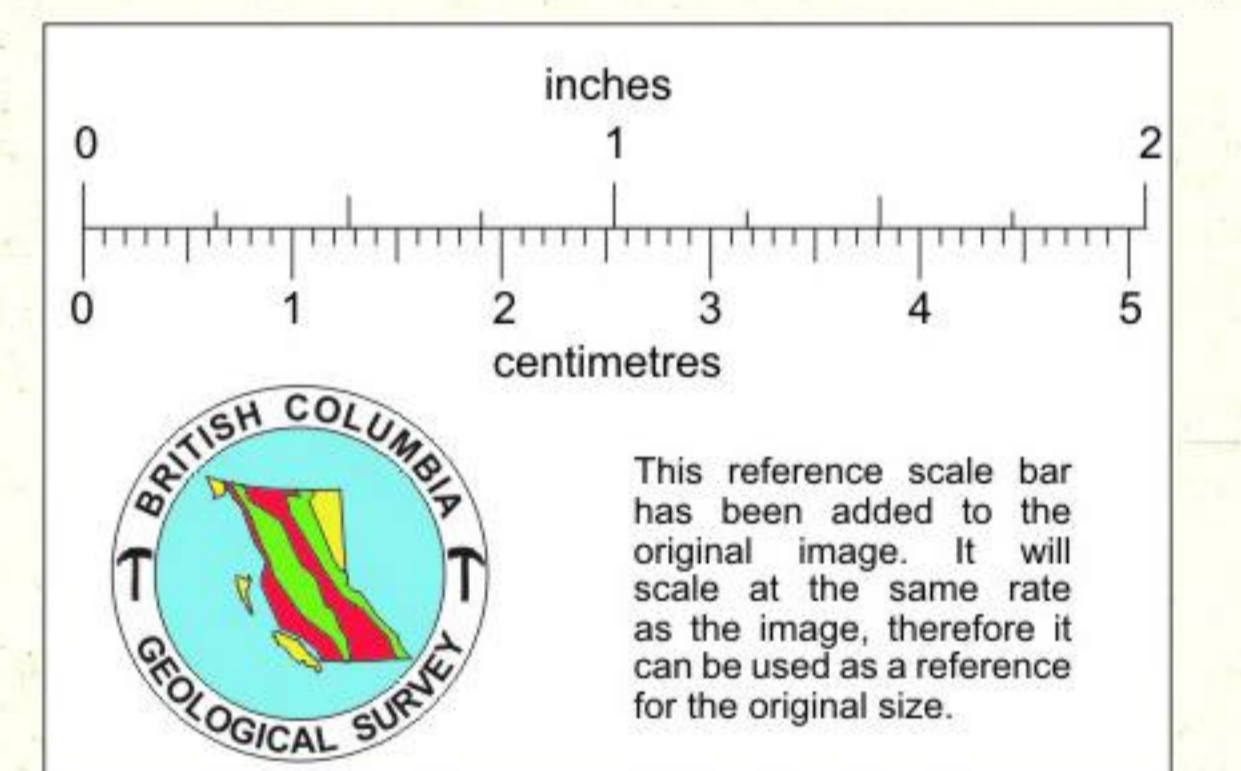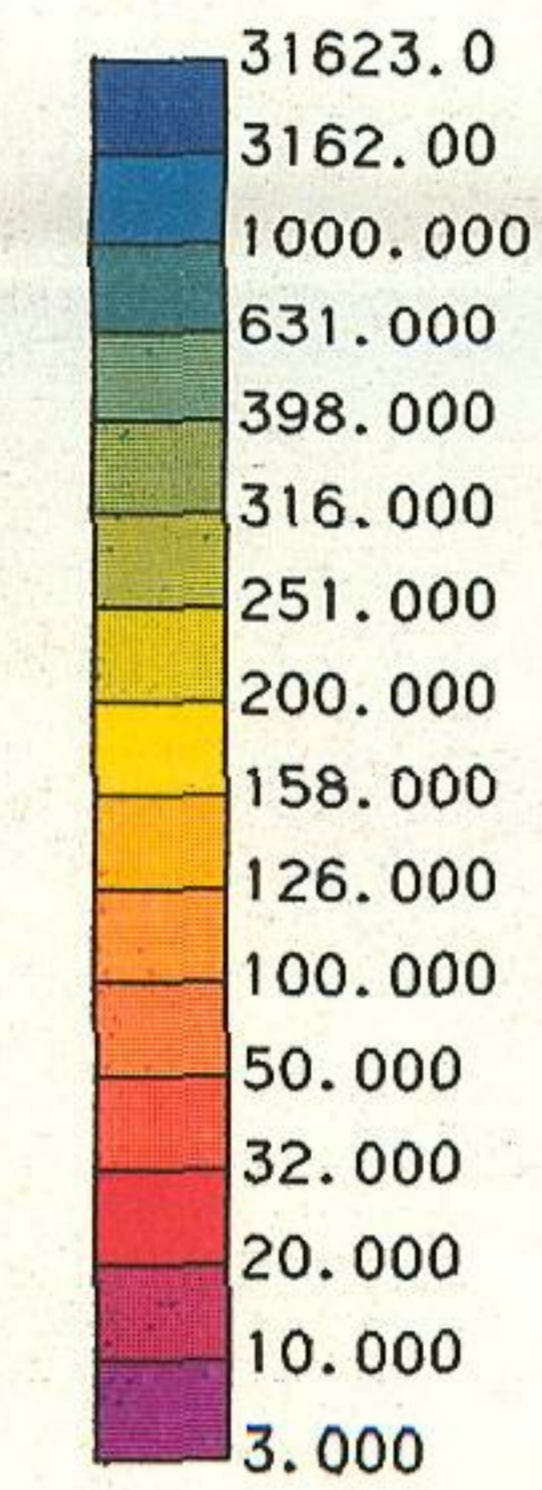


NORANDA EXPLORATION COMPANY, LIMITED

APPARENT RESISTIVITY 800 Hz COPLANAR

NAK
BRITISH COLUMBIA

SCALE 1:20 000

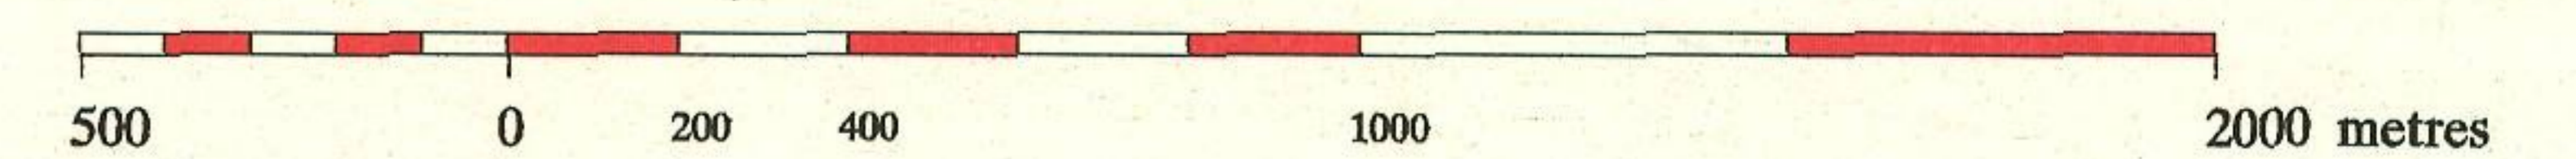

AERODAT LIMITED

Date Flown: FEBRUARY, 1993

NTS Map Ref: 93M/8

Project Ref: J9321

830931

674000 E

676000 E

678000 E