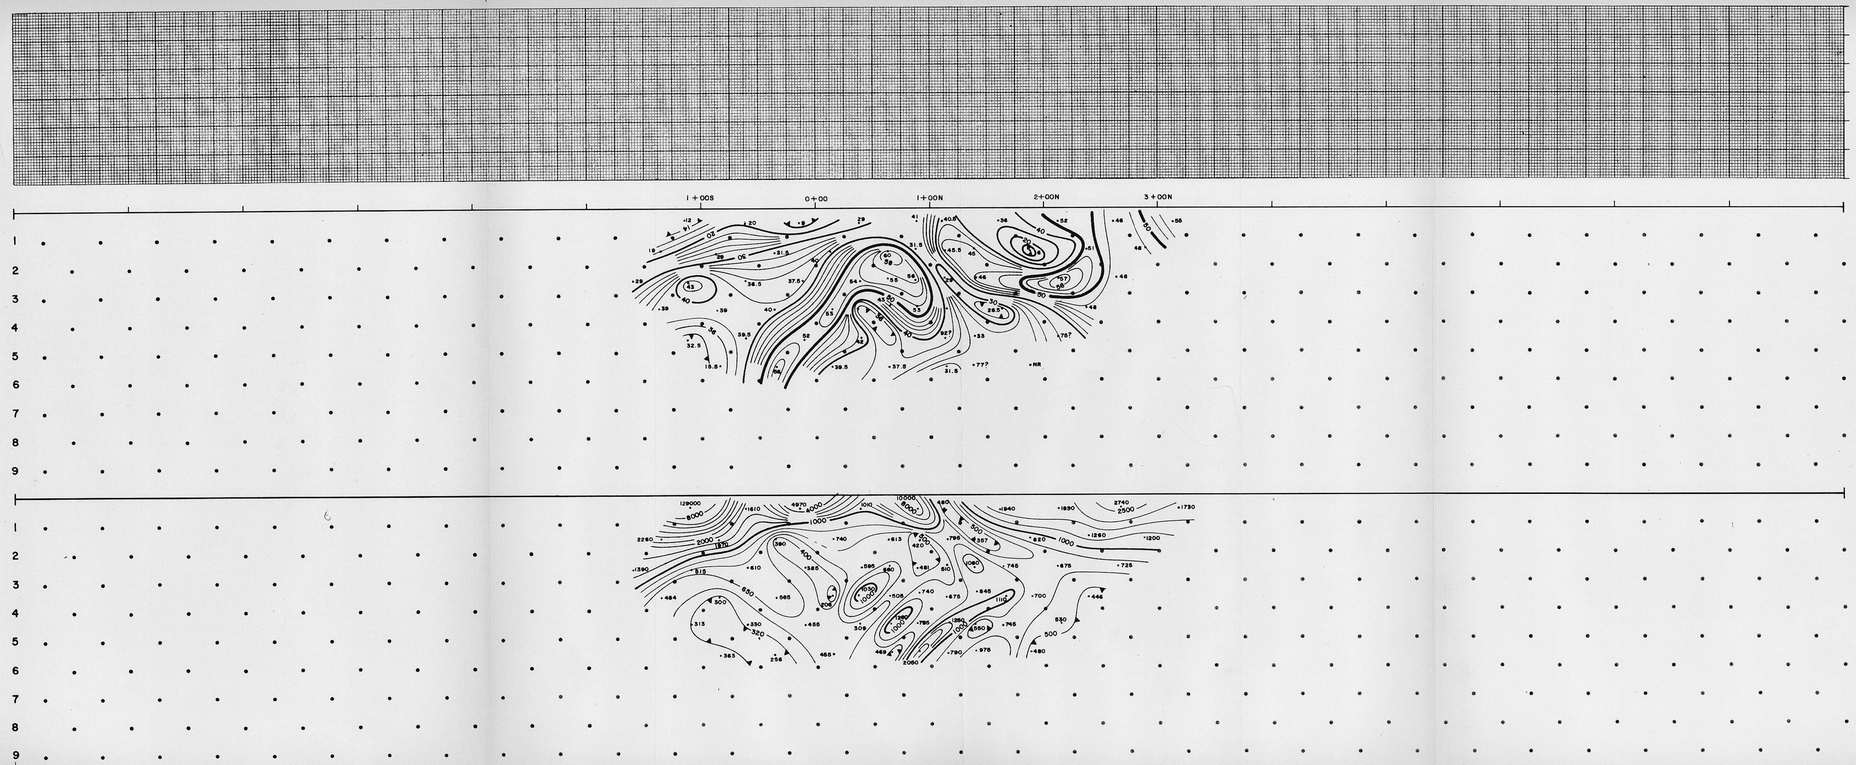

INDUCED POLARIZATION

INDUCED POLARIZATION (TIME DOMAIN) :

CHARGEABILITIES MEASURED FOR COMPLETE CYCLE

CHARGING TIME	secs	Where not specified, times are 2, 2, 0.45 and 0.65 secs respectively, modified to be equivalent to Newmont standard cycle 3; 3; 1
OFF TIME	secs	
DELAY TIME	secs	
INTEGRATION TIME....	secs	

CONFIGURATION . POLE . DIPOLE . . .

DIPOLE LENGTH . . 50 . metres . . . .

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

SURVEYED & COMPILED BY **geoterrex** ltd

FOR CHEVRON STANDARD LIMITED

841136

Scales : HORIZONTAL :
VERTICAL (Magnetics) : 1 cm =
CONTOUR INTERVALS (I.P.) :
Ma = 2 milliseconds
Pa = 10,12.5,15,20,25,32,40,50,65,80 per decade, ohm-metres (pseudo-logarithmic)

Instruments :
I.P. Rx. SCINTREX IPR-7
I.P. Tx. ELLIOT 4.5 KW

CATARACT PROPERTY
(DETAIL)
LINE 0+00

SURVEY BY : P.P.	PLOTTED BY : C.H.
DATE : AUG 1982	GEOTERREX PROJECT No. 85-919