
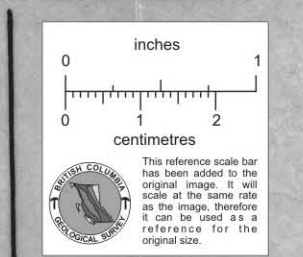


Section Six (6) Lightning Creek Drill Map — Wingdam, B.C.

GENERAL REMARKS.

The bed rock gold channel is about 165 feet from water level. Valley is narrow and sides rather steep. This has doubtless caused numerous slides in the past that changed the course of the surface stream to some extent. This surface flow of the creek also the underground course of the Bed Rock channel is outlined by sketch in right-hand corner. The underground course is indicated by the drilling tests. A dozen or more holes have been drilled into the bed-rock channel from an underground rock tunnel at line A, all showing rich values. The letters A, B, C, D, E, and F show location of drill lines, the circles the number of the drill hole etc. The depth and the distances between each hole are shown. Lines A, B, C, and D show respective values per cubic yard of \$166, \$148, \$148, and \$109. The B values are on a wide bend, the bed-rock deposit not yet being reached. A and D are in narrow parts of the channel. C is a wide part of the channel. E and F Lines require more drilling. Estimated cost of mining less than \$1 per cubic yard on bed-rock. Average values are over \$90 per cubic yard on bed-rock. Numerous benches run from \$8 to \$36 per cubic yard. A 300 (or more) foot wide intermediate deposit on a hard pan base at 124 feet runs from \$12 to \$18 per yard at B.

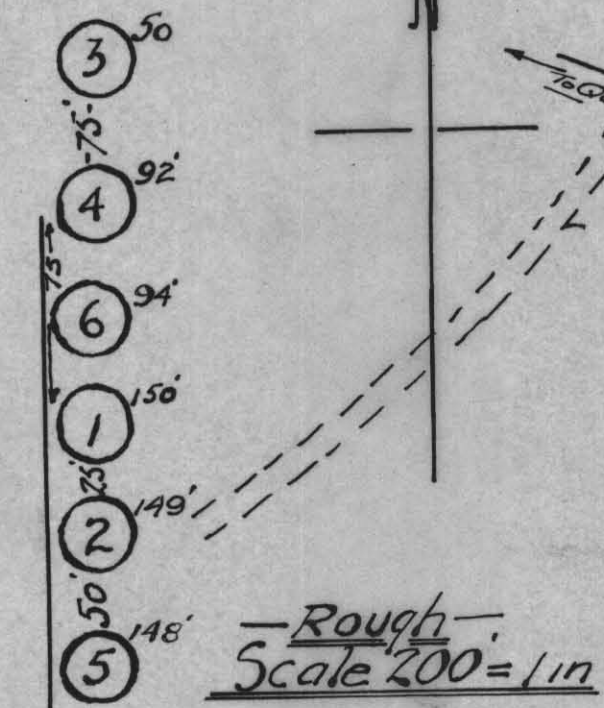

SECTION 6. — One and a half miles.
 General Direction of Surface Creek — Solid Line.
 General Direction of bed-rock course — Dotted line.
 THIS SKETCH IS NOT TO SCALE.

