380 400 420 440 460 480 500

1240 1220 1200 1180 1160 1140 1120 1100 1090

STRONG

WEAK

I.P. Data Line 550 N

≥ 100 ppm Arsenic

V.L.F.
Conductor Axis

azimuth 270°
looking North

88-I-15

casing

overburden

546, 494
(Cu, Au)

cc

shear

py<1%

py 1-3%

py 1-3%
aspy (1-5%)

E.O.H.
110.03 m

0 5 10 15 20
METRES

ELEVATION

MAP "X" COORDINATE

ROCK TYPES

- Hypabyssal andesite : fine to coarse grained and porphyritic chlorite altered
- Ultramafics : chlorite - actinolite altered, fine to coarse grained, magnetite bearing
- Diorite : medium grained
- Shear zone : orientation as indicated
- Massive quartz
- Quartz diorite dyke
- Mafic dyke
- Breccia : monomict, clast or matrix supported clast type according to other rock symbol
- foliation
- q quartz vein (thickness)
- gouge
- cb carbonate vein (thickness)

ALTERATION

- C Clay alteration (includes sericite and unknown bleached zones)
- S Silica alteration
- L Chlorite / talc alteration
- Cb Carbonate alteration

MINERALIZATION

- py pyrite
- po pyrrhotite
- cpy chalcopyrite
- aspy arsenopyrite
- mr mariposite

GEOCHEMICAL ASSAYS

546, 494 - Cu (ppm) Au (ppb)

Location of Cross - Section

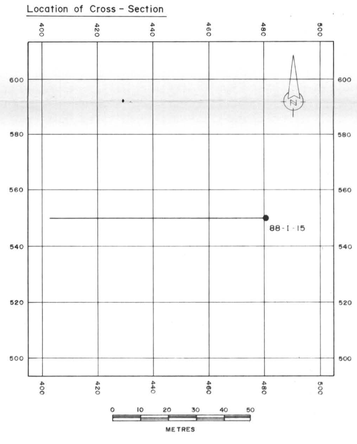

inches
0 1 2
0 1 2 3 4 5
centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

EASTFIELD RESOURCES LTD.

INDATA PROJECT

OMINECA M.D., B.C.

DIAMOND DRILL HOLE 88 - I - 15

(-45°)

MILLWOOD Exploration Consultants Ltd

Scale	1 : 200
Date	Sept 1988
By	M.V.S. / M.C-D
N.T.S.	93 N/6
Figure	

860612