Military users, refer to this map as: / Référence de cette carte pour usage militaire:			
	SERIES	A502	SÉRIE
	MAP	104 J	CARTE
	EDITION	2 MCE	ÉDITION

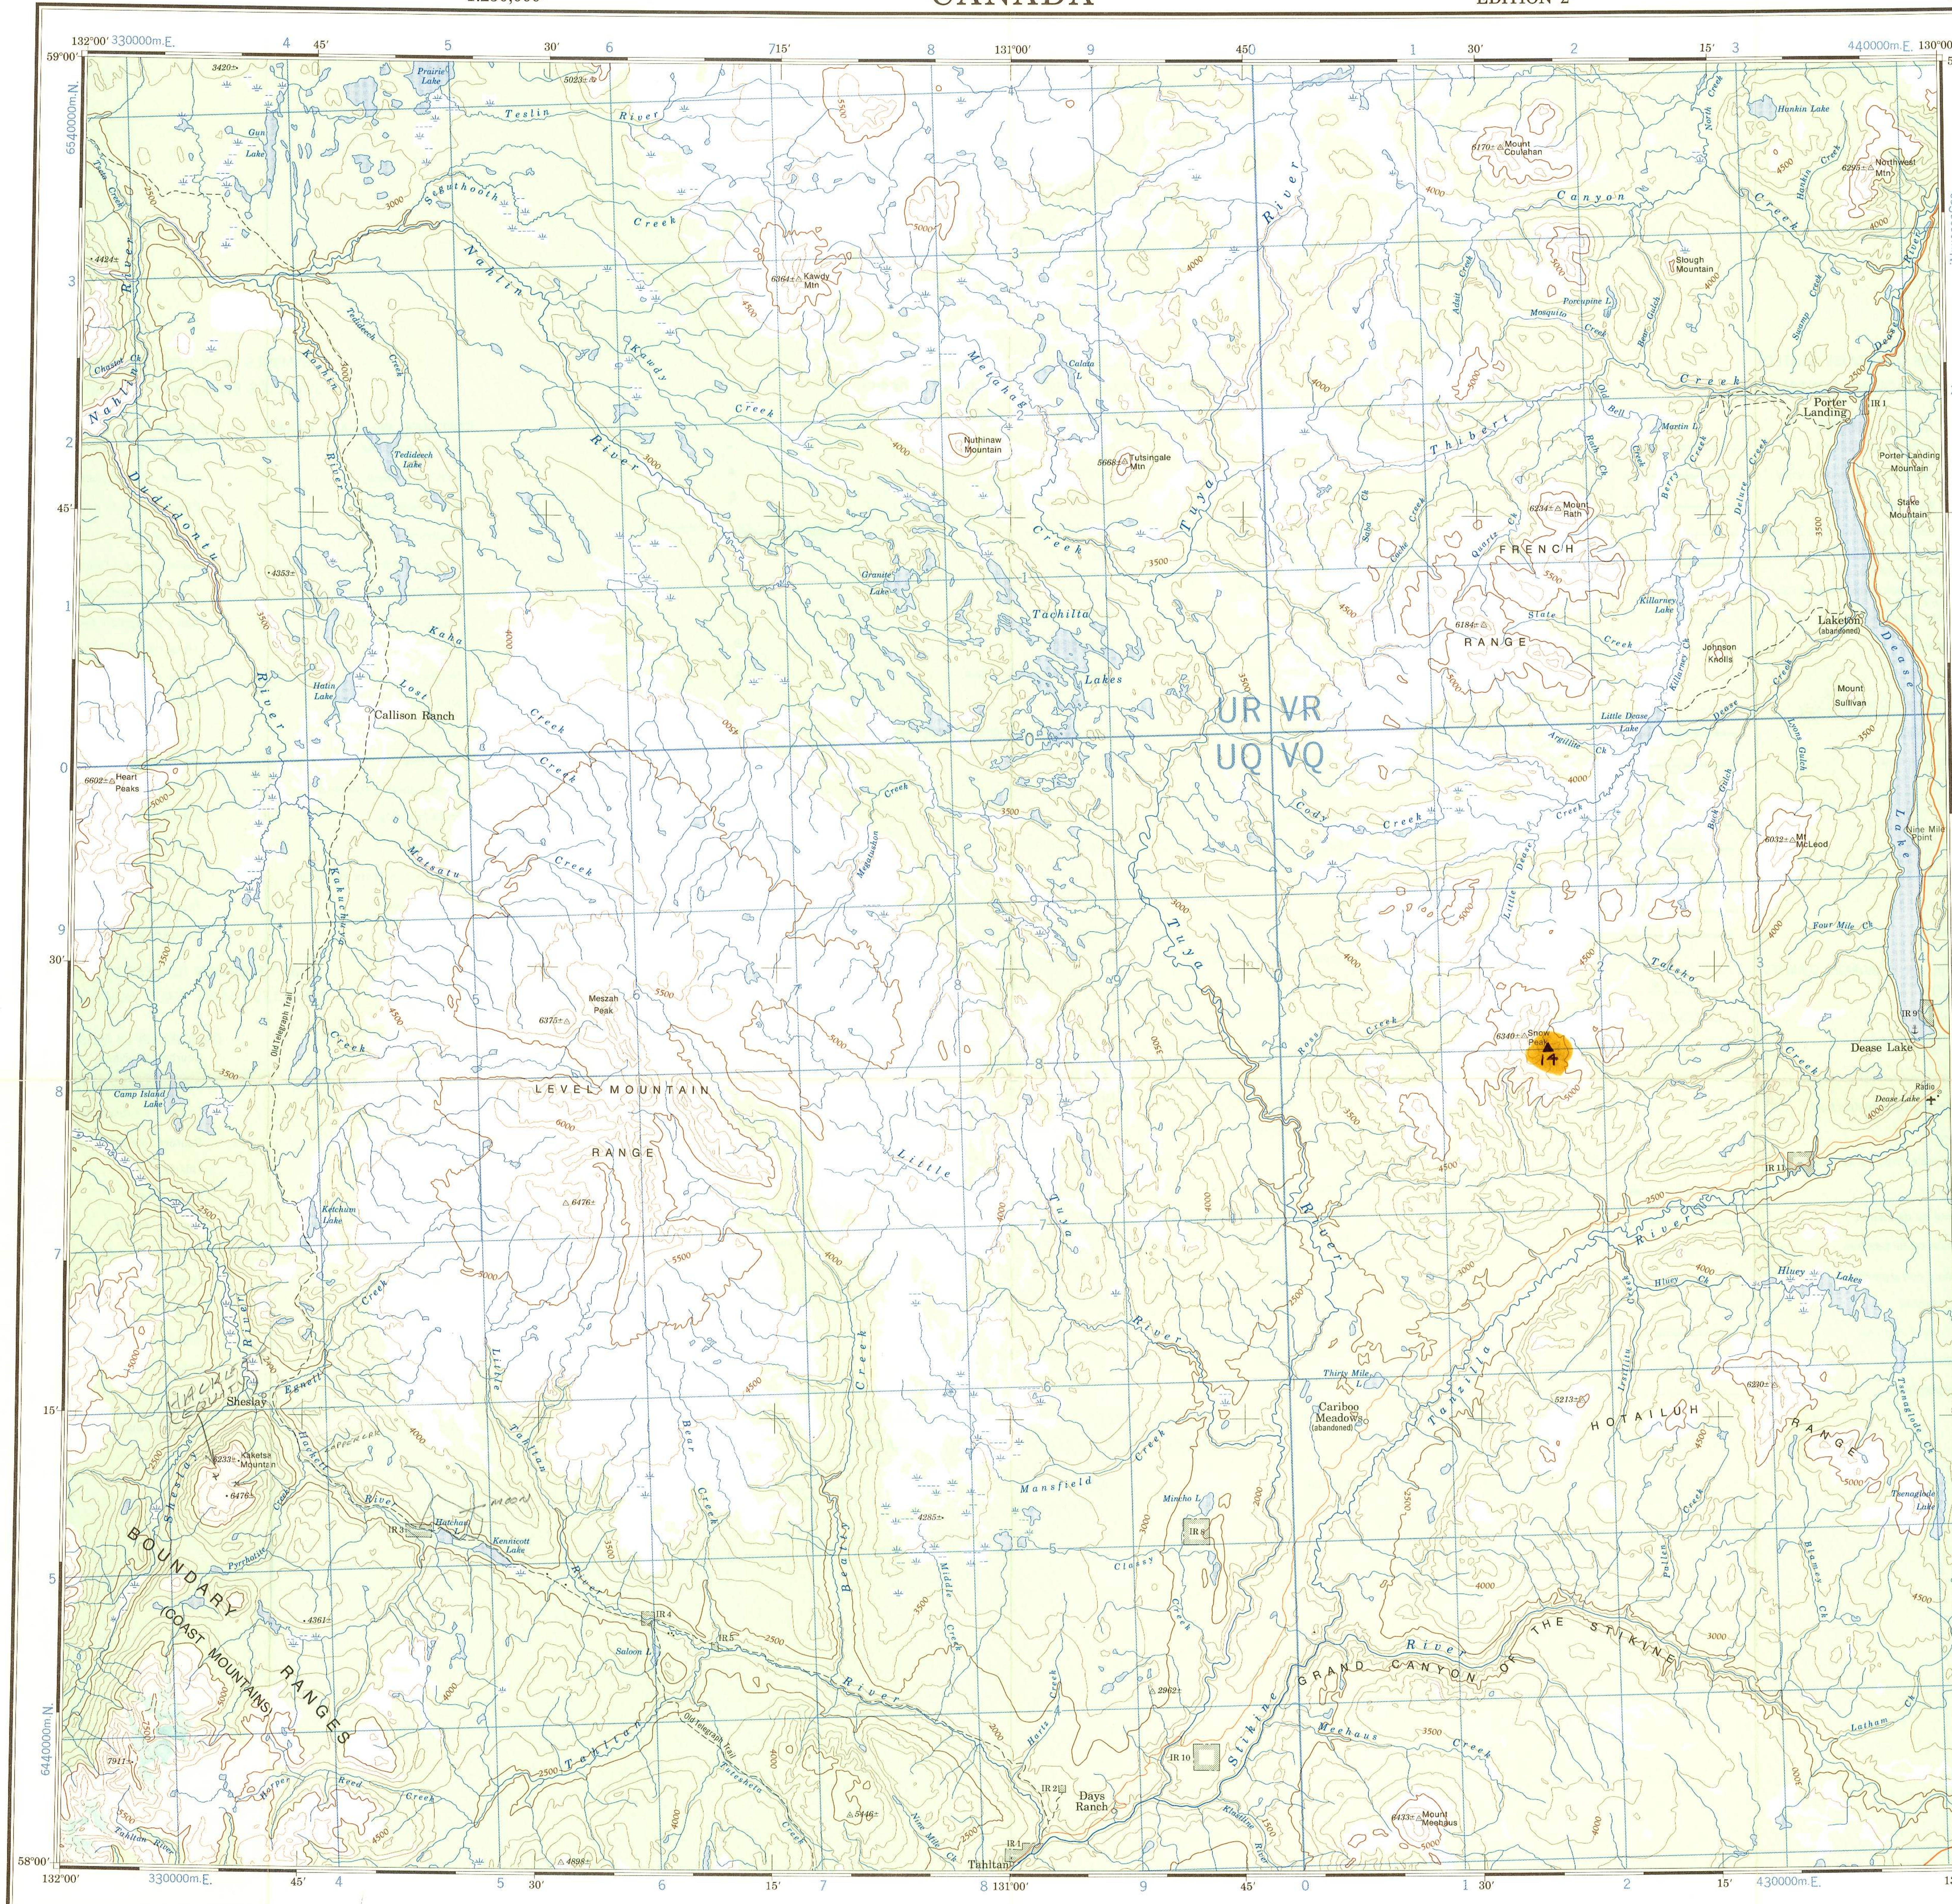

▲ Scheelite
x Cu, Mo

CONVERSION SCALE FOR ELEVATIONS
Feet / Metres

TEN THOUSAND METRE
UNIVERSAL TRANSVERSE MERCATOR GRID
ZONE 9

GRID ZONE DESIGNATION	100,000 M. SQUARE IDENTIFICATION
9V	UR VR / UQ VQ (65, 4)

EXAMPLE OF METHOD USED TO GIVE A REFERENCE TO NEAREST 1000 METRES

THE FOLLOWING GRID REFERENCE IS A SAMPLE ONLY AND DOES NOT REFER TO A POINT ON THIS MAP

REFERENCE POINT	ROCKS (as above)
SQUARE: Read letters of 100,000 m. square	NU
EASTING: Read number on grid line immediately to left of point. Estimate tenths of a square from this line eastward to point.	5 / 4 / 54
NORTHING: Read number on grid line immediately below point. Estimate tenths of a square from this line northward to point.	0 / 4 / 04
EXAMPLE MILITARY GRID REFERENCE	NU5404
If reporting beyond 18° in any direction, prefix Grid Zone Designation as:	15VNU5404

inches 0 1 2
0 1 2 3 4 5 centimetres

BRITISH COLUMBIA GEOLOGICAL SURVEY

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

RELIABILITY DIAGRAM - CROQUIS D'EXACTITUDE



A. Second edition map, derived from large scale mapping.

A. Deuxième édition, tirée de cartographie à grande échelle.

Produced, 1969, by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND RESOURCES. Printed 1971

Magnetic declination 1969 varies from 29°22′ easterly at centre of west edge to 29°26′ easterly at centre of east edge. Mean annual change 4.3′ westerly.

Copies may be obtained from the Canada Map Office, Department of Energy, Mines and Resources, Ottawa, or your nearest map dealer.

Roads:
loose or stabilized surface, all weather .... 2 lanes or more / less than 2 lanes
loose surface, dry weather ....

FOR COMPLETE REFERENCE SEE REVERSE SIDE

DEASE LAKE

CASSIAR DISTRICT

BRITISH COLUMBIA

Scale 1:250,000 Échelle

Miles 5 0 5 10 15 20 Milles

Kilometres 5 0 5 10 15 20 25 30 Kilomètres

CONTOUR INTERVAL 500 FEET
Elevations in Feet above Mean Sea Level
North American Datum 1927
Transverse Mercator Projection

ÉQUIDISTANCE DES COURBES 500 PIEDS
Élévations en pieds au-dessus du niveau moyen de la mer
Système de référence géodésique nord-américain, 1927
Projection transverse de Mercator

Établie en 1969, par la DIRECTION DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES RESSOURCES. Imprimée en 1971

La déclinaison magnétique pour 1969 varie de 29°22′ est au centre de la limite Ouest à 29°26′ est au centre de la limite Est. Variation moyenne annuelle 4.3′ Ouest.

Ces cartes sont en vente au Bureau des Cartes du Canada, ministère de l'Énergie, des Mines et des Ressources, Ottawa, ou chez le vendeur le plus près.

Routes:
gravier aggloméré, toute saison .... 2 voies ou plus / moins de 2 voies
de gravier période sèche ....

POUR UNE LISTE COMPLÈTE DES SIGNES, VOIR AU VERSO

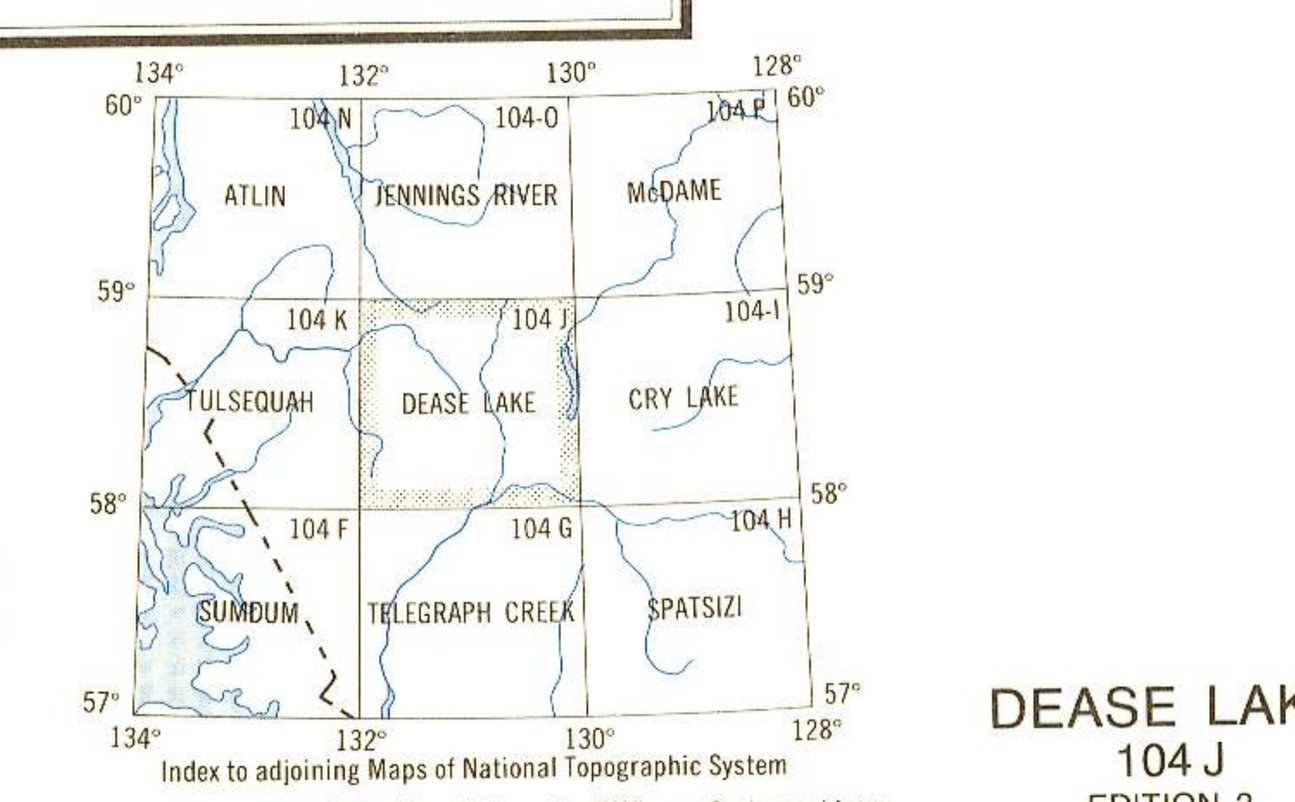

Index to adjoining Maps of National Topographic System
Tableau d'assemblage du Système National de Référence Cartographique

DEASE LAKE
104 J
EDITION 2

861395