

Regional Resources Ltd.

1980 - 1055 West Hastings Street, Guinness Tower, Vancouver, B.C. V6E 2E9
Telephone: (604) 669-3398

Silver Tip
887618

NEWS

For Release: June 8, 1984

Contact: J. W. Stollery (604) 669-3398

M I D W A Y P R O P E R T Y

Outstanding, silver-zinc-lead intersections have been encountered in the first series of 1984 drill holes focused in the Silver Creek area and spaced at 250 foot intervals.

The most significant intersections from the six 1984 holes completed to date (84-53 through 84-58) are reported below. (Refer to attached plan for hole locations).


<u>Hole</u>	<u>From (ft) - To (ft)</u>	<u>Core Length</u>	<u>oz/ton Silver</u>	<u>% Zinc</u>	<u>% Lead</u>	<u>% Zinc-Lead</u>
84-53	196.9 - 214.9	18.0 ft	12.13	15.31	8.83	24.14
84-54	262.8 - 273.0	10.2 ft	18.46	10.88	10.97	21.85
84-55	426.2 - 436.4	10.2 ft	4.37	10.97	2.88	13.85
84-57	339.9 - 369.8	29.9 ft	17.40	11.36	12.94	24.30

These results demonstrate remarkable continuity, increase the grade and double the reserves of the Silver Creek deposit which remains open to further expansion. The Midway property hosts a deposit(s), Silver Creek and Discovery, which had combined estimated geological reserves of 4.6 million tons grading 10.2 oz/ton silver, 12.3% zinc and 5.1% lead at the completion of the 1983 program. The property is 51% owned and managed by Regional with Canamax Resources Inc. and Procan Exploration Company together holding a 49% interest.


The previously announced agreement with Mineral Resources International Limited - Nanasivik Mines Ltd. to provide financing of up to \$8.4 million has been finalized and Graham Farquharson, President of Nanasivik, has been appointed a Director.

Regional is listed on the Toronto and Vancouver Stock Exchanges under the symbol RGL.

REGIONAL RESOURCES LTD.

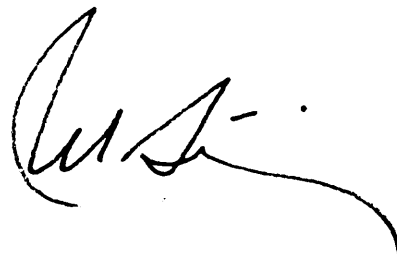

By: John W. Stollery, President

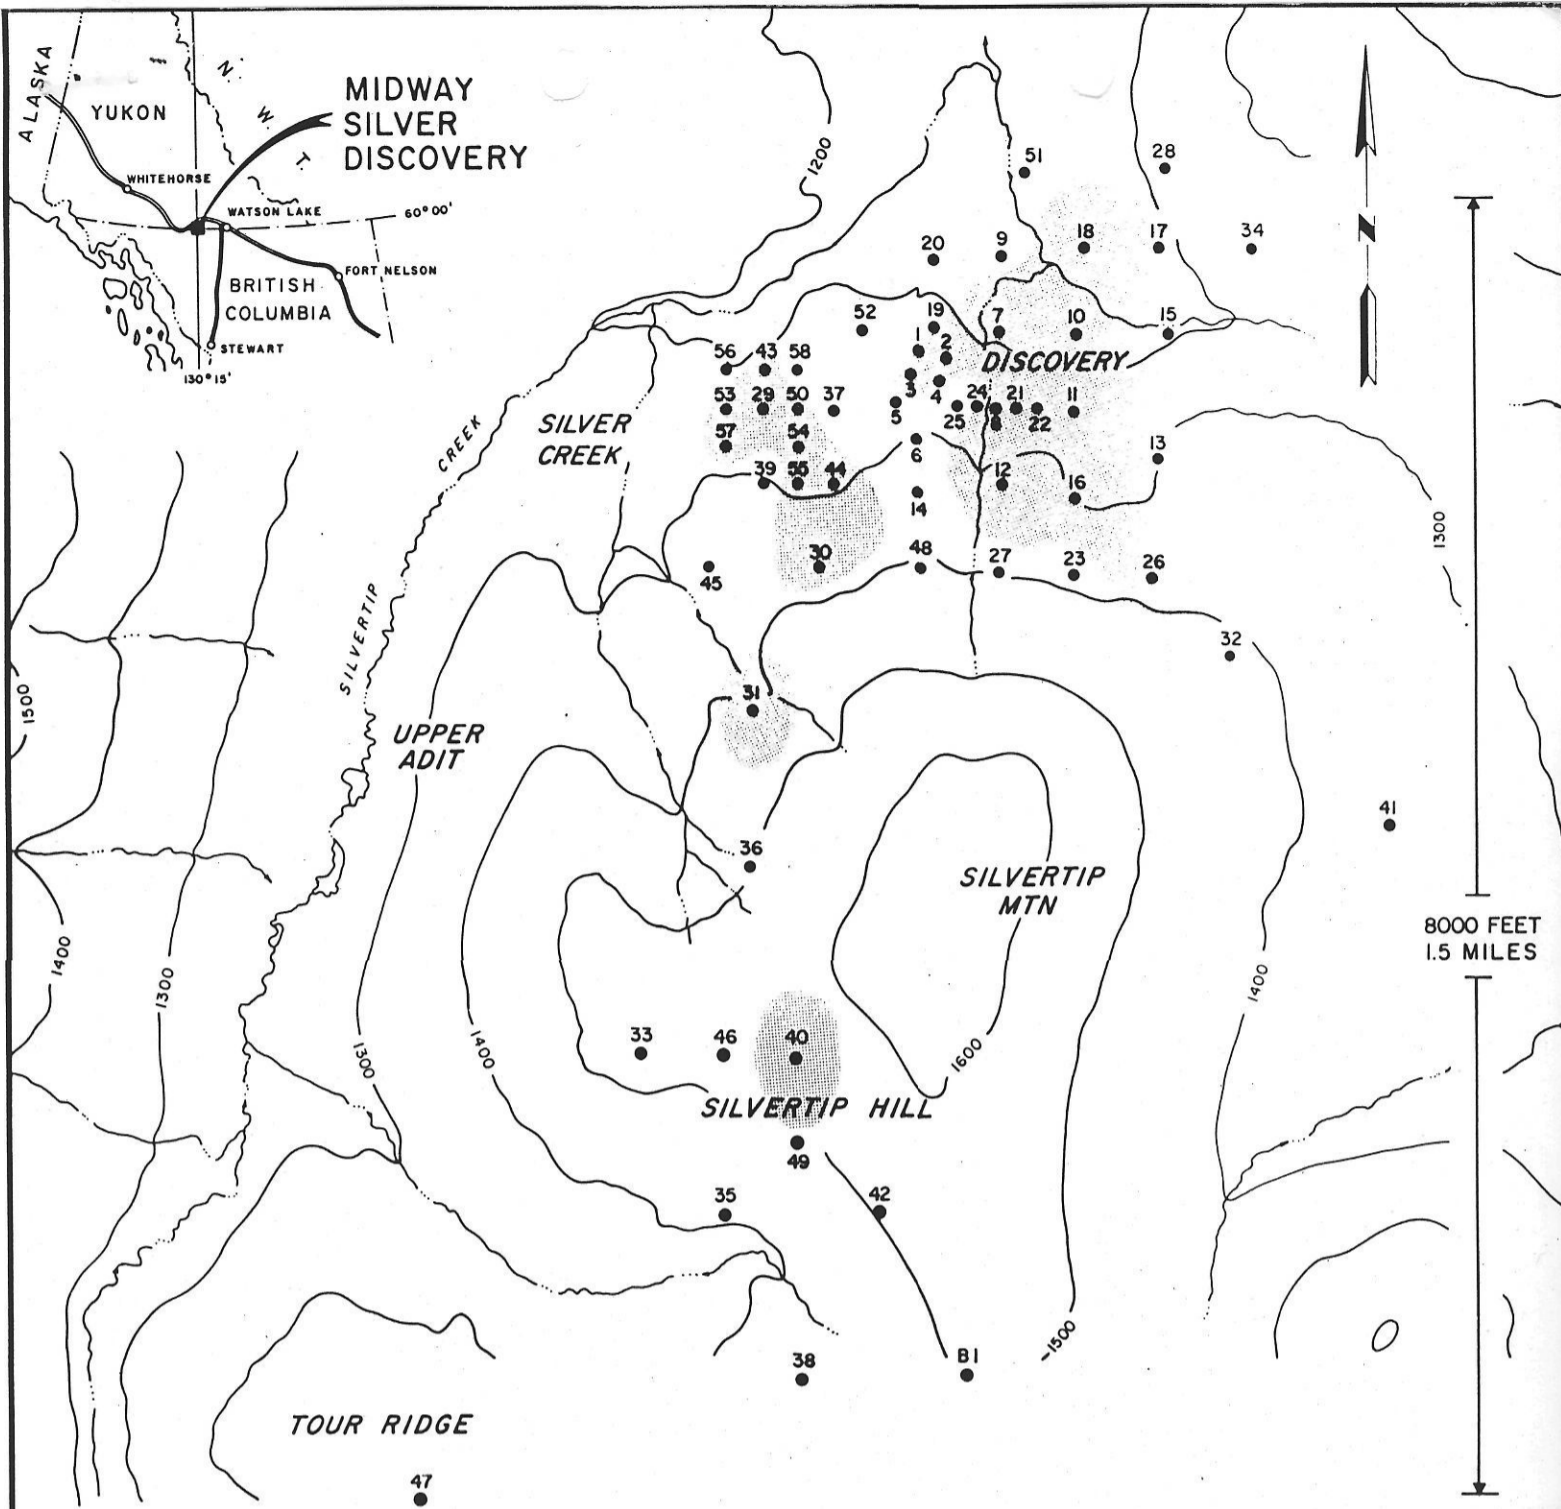

SUMMARY OF LOWER ZONE INTERSECTIONS


DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton	DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton
81-1	-70°	330°	406.0- 410.0	4.0	6.92	4.06	10.98	4.89	83-31	-80°	270°	1545.0-1548.9	3.9	3.55	4.20	7.75	5.05
81-2	-70°	300°	465.9- 469.0	3.1	3.02	1.70	4.72	2.91	83-40	-80°	270°	1043.0-1049.7	6.7	6.60	4.34	10.94	10.10
81-3	-70°	300°	373.1- 381.1	8.0	5.24	11.80	17.04	16.18				1454.1-1455.0	0.9	1.69	48.27	49.96	68.20
81-5	-70°	300°	386.6- 390.9	4.3	1.87	0.86	2.73	1.27	83-43	-80°	270°	64.6- 77.7	13.1	1.35	10.15	11.50	14.10
82-7	-70°	270°	633.6- 650.0	16.4	4.85	3.07	7.92	11.05	83-44	-80°	270°	433.2- 438.8	5.6	7.32	1.65	8.97	3.80
82-8	-70°	270°	671.3- 700.5	29.2	15.80	10.58	26.38	20.15	83-50	-80°	270°	157.1- 195.5	38.4	0.50	1.51	2.01	3.31
			743.1- 746.4	3.3	10.10	14.15	24.25	24.00				208.0- 217.2	9.2	11.05	0.23	11.28	0.39
82-9	-70°	270°	650.6- 651.9	1.3	13.31	1.25	14.56	3.44									
82-10	-70°	270°	823.2- 841.9	18.7	5.95	7.95	13.90	11.30									
			805.8- 813.3	7.5	6.30	0.86	7.16	4.55									
82-11	-80°	270°	1037.1-1046.0	8.9	15.54	7.80	23.34	17.40									
82-12	-70°	270°	935.0- 940.0	5.0	6.95	7.48	14.43	12.98									
82-13	-90°		1723.4-1723.9	0.5	11.00	5.25	16.25	8.37									
82-16	-80°	270°	1257.9-1281.8	23.9	18.96	5.63	24.59	9.52									
82-17	-80°	270°	1584.1-1588.7	4.6	21.39	1.78	23.17	13.80									
82-18	-80°	270°	1015.8-1024.0	8.2	7.40	2.38	9.78	4.75									
82-20	-80°	270°	532.5- 534.8	2.3	12.00	1.85	13.85	2.76									
83-21	-70°	270°	761.0- 774.6	13.6	7.45	5.90	13.35	8.13									
			861.9- 876.8	14.9	14.07	17.44	31.51	25.15									
83-23	-80°	270°	1694.3-1696.9	2.6	9.55	0.19	9.74	1.64									
83-24	-70°	270°	671.8- 673.9	2.1	8.30	11.20	19.50	19.80									
			687.7- 693.6	5.9	6.80	4.60	11.40	7.31									
83-26	-80°	270°	1853.7-1860.3	6.6	31.00	0.05	31.05	0.45									
83-27	-80°	270°	1254.3-1259.5	5.2	1.92	3.01	4.93	4.75									
83-29	-80°	270°	212.9- 223.4	10.5	14.92	11.43	26.35	18.10									
83-30	-80°	270°	901.2- 904.8	3.6	11.10	0.30	11.40	5.28									

*Assay based on 9.5 feet of core recovered

LEGEND

- 14 DIAMOND DRILL HOLE
- 1300 TOPOGRAPHIC CONTOUR IN METRES
- CREEK
- SILVER, ZINC, LEAD DEPOSIT

REGIONAL RESOURCES LTD.
DIAMOND DRILL HOLE PLAN
MIDWAY
SILVER ZINC LEAD PROPERTY



JUNE 8, 1984

Regional Resources Ltd.

1980 - 1055 West Hastings Street, Guinness Tower, Vancouver, B.C. V6E 2E9
Telephone: (604) 669-3398

NEWS

For Release: June 20, 1984

Contact: J. W. Stollery

(604) 669-3398

MIDWAY PROPERTY

Additional silver-zinc-lead intersections have been encountered in drill holes spaced at 250 foot intervals in the Silver Creek area. Results from the first six holes, 84-53 through 84-58, were previously reported on June 8.

Assays from five more holes, 84-59 to 84-63, are reported below. (Refer to attached plan for hole locations).

Hole	From (ft) - To (ft)	Core Length	oz/ton Silver	% Zinc	% Lead	% Zinc+Lead
84-59	582.3 - 588.2	5.9 ft	4.77	23.65	2.21	25.86
84-60	351.2 - 392.7	41.5 ft	21.30	9.23	15.34	24.57
84-61	220.8 - 231.0	10.2 ft	7.53	7.53	7.88	15.41
84-62	245.1 - 253.9	8.8 ft	9.25	5.66	3.83	9.49
84-63	459.3 - 465.2	5.9 ft	4.47	11.14	0.96	12.10
	510.8 - 516.7	5.9 ft	3.50	12.00	2.59	14.59

In addition to the above, gold values of 0.088 oz/ton over 9.9 feet and 0.096 oz/ton over 8.0 feet were encountered in two separate intervals in hole 84-60.

Preliminary 1984 calculations indicate a considerable increase in geological reserves and grades as follows:


	1983 Mineral Inventory					1984 Mineral Inventory				
	Short tons	oz/ton Silver	% Zinc	% Lead	% Zinc+Lead	Short tons	oz/ton Silver	% Zinc	% Lead	% Zinc+Lead
Discovery	4,011,590	10.46	12.88	5.15	18.03	4,011,590	10.46	12.88	5.15	18.03
Silver Creek	667,820	8.51	8.94	4.98	13.92	1,413,560	14.04	10.59	9.81	20.40
	4,679,410	10.18	12.32	5.13	17.45	5,425,150	11.39	12.28	6.36	18.64

Three drills are continuing to explore the Silver Creek deposit.


The Midway property is 51% owned and managed by Regional with Canamax Resources Inc. and Procan Exploration Company together holding a 49% interest.

Regional is listed on the Toronto and Vancouver Stock Exchanges under the symbol RGL.

REGIONAL RESOURCES LTD.

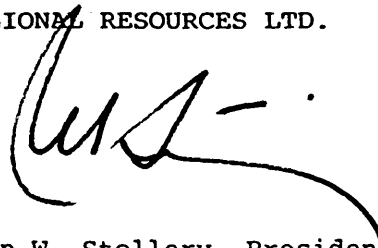

By: John W. Stollery, President

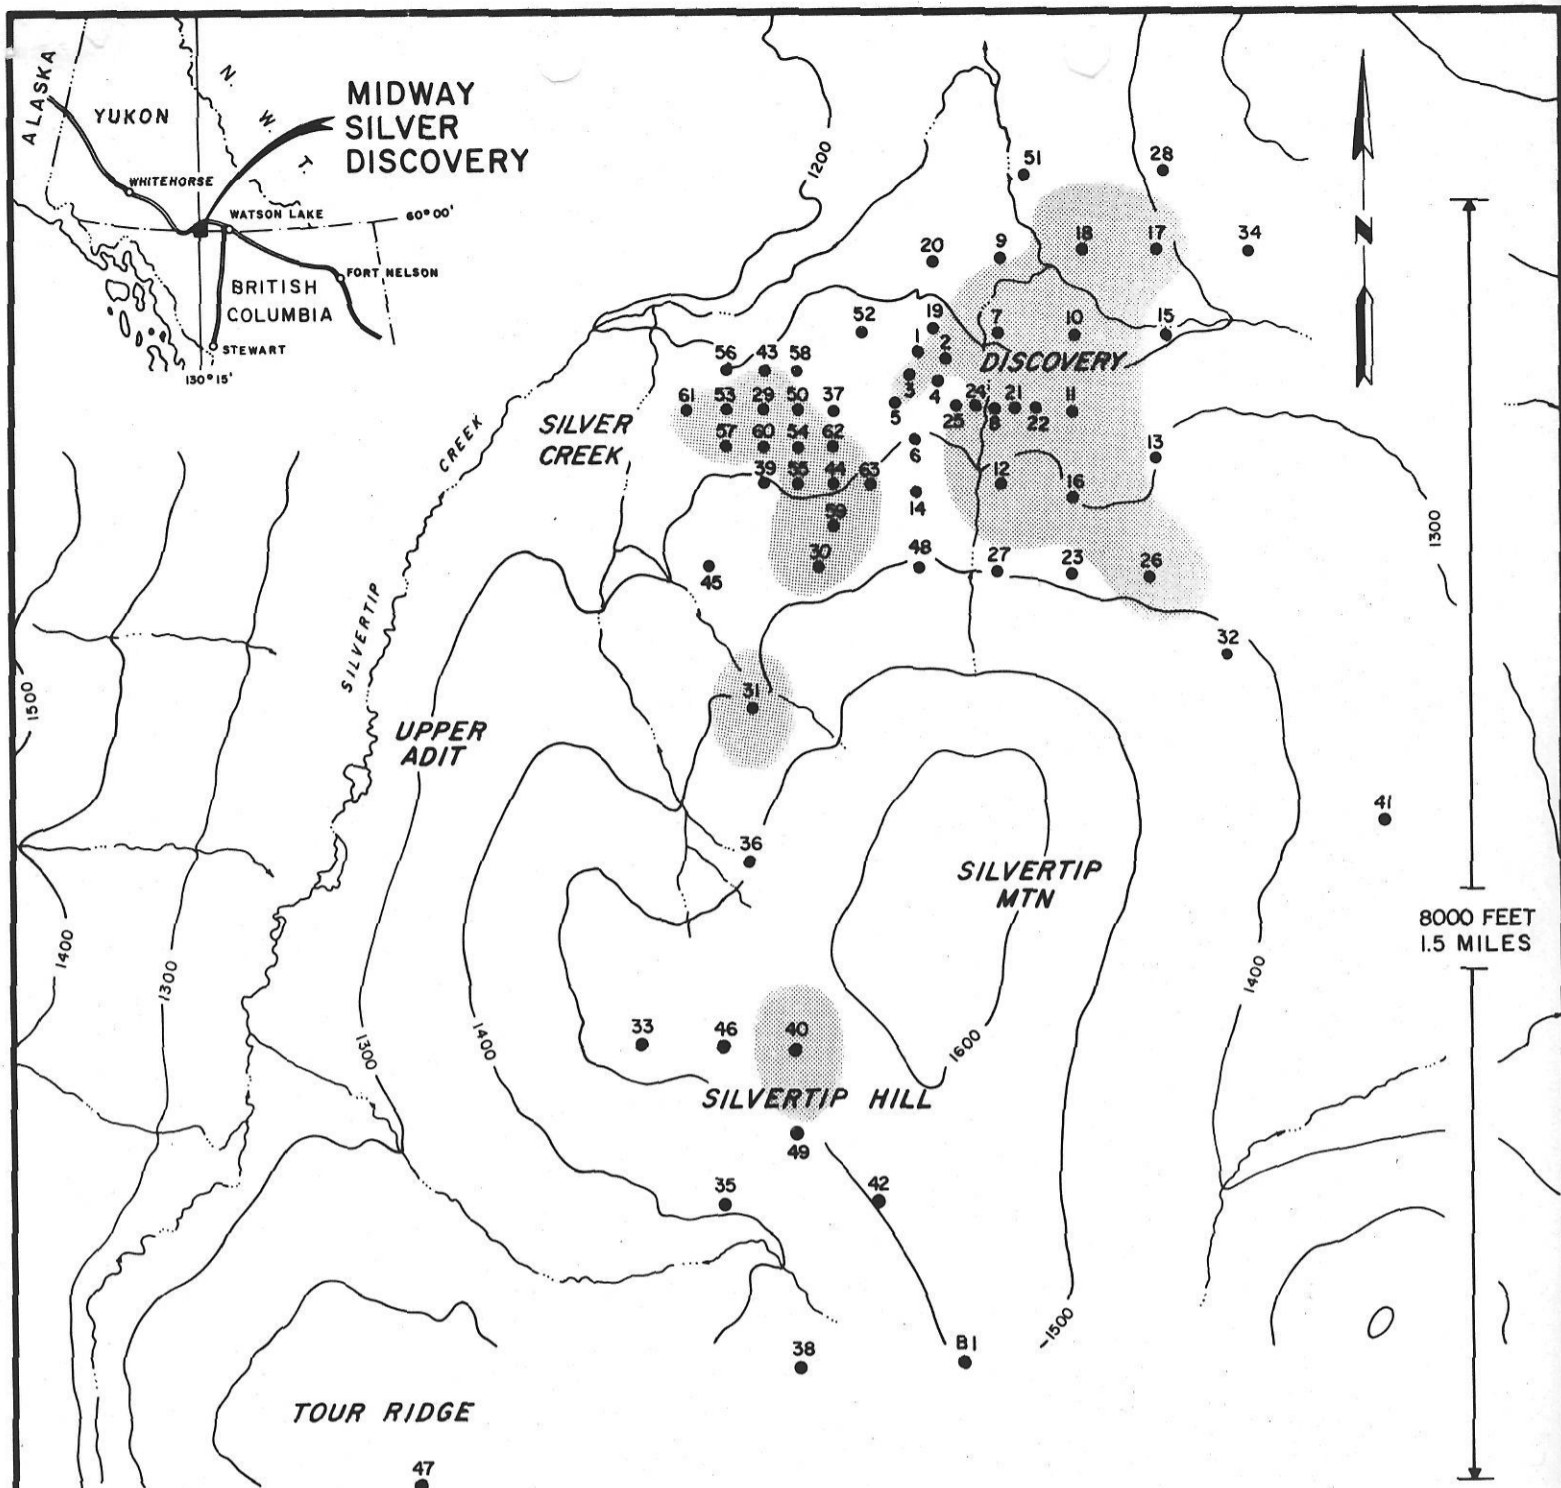

SUMMARY OF LOWER ZONE INTERSECTIONS


DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton	DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton
81-1	-70°	330°	406.0- 410.0	4.0	6.92	4.06	10.98	4.89	83-31	-80°	270°	1545.0-1548.9	3.9	3.55	4.20	7.75	5.05
81-2	-70°	300°	465.9- 469.0	3.1	3.02	1.70	4.72	2.91	83-40	-80°	270°	1043.0-1049.7	6.7	6.60	4.34	10.94	10.10
81-3	-70°	300°	373.1- 381.1	8.0	5.24	11.80	17.04	16.18				1454.1-1455.0	0.9	1.69	48.27	49.96	68.20
81-5	-70°	300°	386.6- 390.9	4.3	1.87	0.86	2.73	1.27	83-43	-80°	270°	64.6- 77.7	13.1	1.35	10.15	11.50	14.10
82-7	-70°	270°	633.6- 650.0	16.4	4.85	3.07	7.92	11.05	83-44	-80°	270°	433.2- 438.8	5.6	7.32	1.65	8.97	3.80
82-8	-70°	270°	671.3- 700.5	29.2	15.80	10.58	26.38	20.15	83-50	-80°	270°	157.1- 195.5	38.4	0.50	1.51	2.01	3.31
			743.1- 746.4	3.3	10.10	14.15	24.25	24.00				208.0- 217.2	9.2	11.05	0.23	11.28	0.39
82-9	-70°	270°	650.6- 651.9	1.3	13.31	1.25	14.56	3.44	84-53	-90°	0°	196.9- 214.9	18.0	15.31	8.83	24.14	12.13
82-10	-70°	270°	823.2- 841.9	18.7	5.95	7.95	13.90	11.30	84-54	-90°	0°	262.8- 273.0	10.2	10.82	12.30	23.12	19.54
			805.8- 813.3	7.5	6.30	0.86	7.16	4.55	84-55	-80°	270°	426.2- 436.4	10.2	10.97	2.88	13.85	4.37
82-11	-80°	270°	1037.1-1046.0	8.9	15.54	7.80	23.34	17.40	84-57	-90°	0°	339.9- 369.8	29.9	11.36	12.94	24.30	17.40
82-12	-70°	270°	935.0- 940.0	5.0	6.95	7.48	14.43	12.98									
82-13	-90°		1723.4-1723.9	0.5	11.00	5.25	16.25	8.37									
82-16	-80°	270°	1257.9-1281.8	23.9	18.96	5.63	24.59	9.52									
82-17	-80°	270°	1584.1-1588.7	4.6	21.39	1.78	23.17	13.80									
82-18	-80°	270°	1015.8-1024.0	8.2	7.40	2.38	9.78	4.75									
82-20	-80°	270°	532.5- 534.8	2.3	12.00	1.85	13.85	2.76									
83-21	-70°	270°	761.0- 774.6	13.6	7.45	5.90	13.35	8.13									
			861.9- 876.8	14.9	14.07	17.44	31.51	25.15									
83-23	-80°	270°	1694.3-1696.9	2.6	9.55	0.19	9.74	1.64									
83-24	-70°	270°	671.8- 673.9	2.1	8.30	11.20	19.50	19.80									
			687.7- 693.6	5.9	6.80	4.60	11.40	7.31									
83-26	-80°	270°	1853.7-1860.3	6.6	31.00	0.05	31.05	0.45									
83-27	-80°	270°	1254.3-1259.5	5.2	1.92	3.01	4.93	4.75									
83-29	-80°	270°	212.9- 223.4	10.5	14.92	11.43	26.35	18.10									
83-30	-80°	270°	901.2- 904.8	3.6	11.10	0.30	11.40	5.28									

*Assay based on 9.5 feet of core recovered

LEGEND

- DIAMOND DRILL HOLE
- 1500 ——— TOPOGRAPHIC CONTOUR IN METRES
- CREEK
- SILVER, ZINC, LEAD DEPOSIT

REGIONAL RESOURCES LTD.
DIAMOND DRILL HOLE PLAN
 MIDWAY
 SILVER ZINC LEAD PROPERTY



Regional Resources Ltd.

1980 - 1055 West Hastings Street, Guinness Tower, Vancouver, B.C. V6E 2E9
Telephone: (604) 669-3398

NEWS

For Release: August 1, 1984

Contact: J. W. Stollery

(604) 669-3398

MIDWAY PROPERTY - Silver, Zinc, Lead

Tonnage and Grade Increase - Budget Increase - Underground in October

The ongoing 1984 program has continued to encounter outstanding success. A total of 22,400 ft in 36 holes have been drilled to date. Results from the first eleven holes (84-53 to 84-63) were released in June. The most significant intersections from holes 84-64 to 84-88 are reported below. (Refer to attached plan for locations).

Hole	From (ft) - To (ft)	Core Length	oz/ton Silver	% Zinc	% Lead	% Zinc-Lead
84-66	642.8 - 648.8	6.0 ft	3.96	5.78	1.97	7.75
84-67	769.9 - 775.9	6.0 ft	4.87	6.04	1.26	7.30
84-69	367.5 - 375.0	7.5 ft	3.43	6.94	2.02	8.96
	382.2 - 391.4	9.2 ft	15.15	11.35	6.04	17.39
84-73	135.2 - 145.7	10.5 ft	6.54	12.49	4.69	17.18
84-77	738.2 - 778.2	40.0 ft	15.66	12.47	10.11	22.58
	975.1 - 983.6	8.5 ft	20.75	9.28	14.41	23.69
84-78	89.9 - 106.6	16.7 ft	10.71	7.21	10.30	17.51
84-81	708.0 - 714.2	6.2 ft	38.41	6.63	21.02	27.65
84-82	755.9 - 761.9	6.0 ft	11.48	16.66	3.71	20.37
84-84	1023.3 - 1061.7	38.4 ft	14.28	15.93	8.08	24.01

Revised 1984 geological reserves and grades are as follows:

	<u>1983 Mineral Inventory</u>					<u>1984 Mineral Inventory</u> (Includes Holes 84-53 to 84-88)				
	Short tons	oz/ton Silver	% Zinc	% Lead	Zinc+Lead	Short tons	oz/ton Silver	% Zinc	% Lead	Zinc+Lead
Discovery	4,011,590	10.46	12.88	5.15	18.03	4,011,590	10.46	12.88	5.15	18.03
Silver Creek	667,820	8.51	8.94	4.98	13.92	2,652,307	13.12	11.12	8.84	19.86
	4,679,410	10.18	12.32	5.13	17.45	6,663,897	11.52	12.14	6.62	18.76


The exploration budget has been increased to \$5.1 million from \$4.2 million and the surface drilling program will continue into September.

Underground exploration of the Silver Creek deposit is scheduled to commence in October and may continue throughout the winter.


The Midway property is 51% owned and managed by Regional with Canamax Resources Inc. and Procan Exploration Company together holding a 49% interest.

Regional is listed on the Toronto and Vancouver Stock Exchanges under the symbol RGL.

REGIONAL RESOURCES LTD.

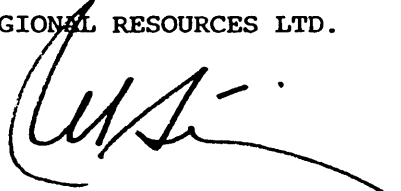
By: John W. Stollery, President

The Vancouver Stock Exchange has neither approved nor disapproved the information contained herein.

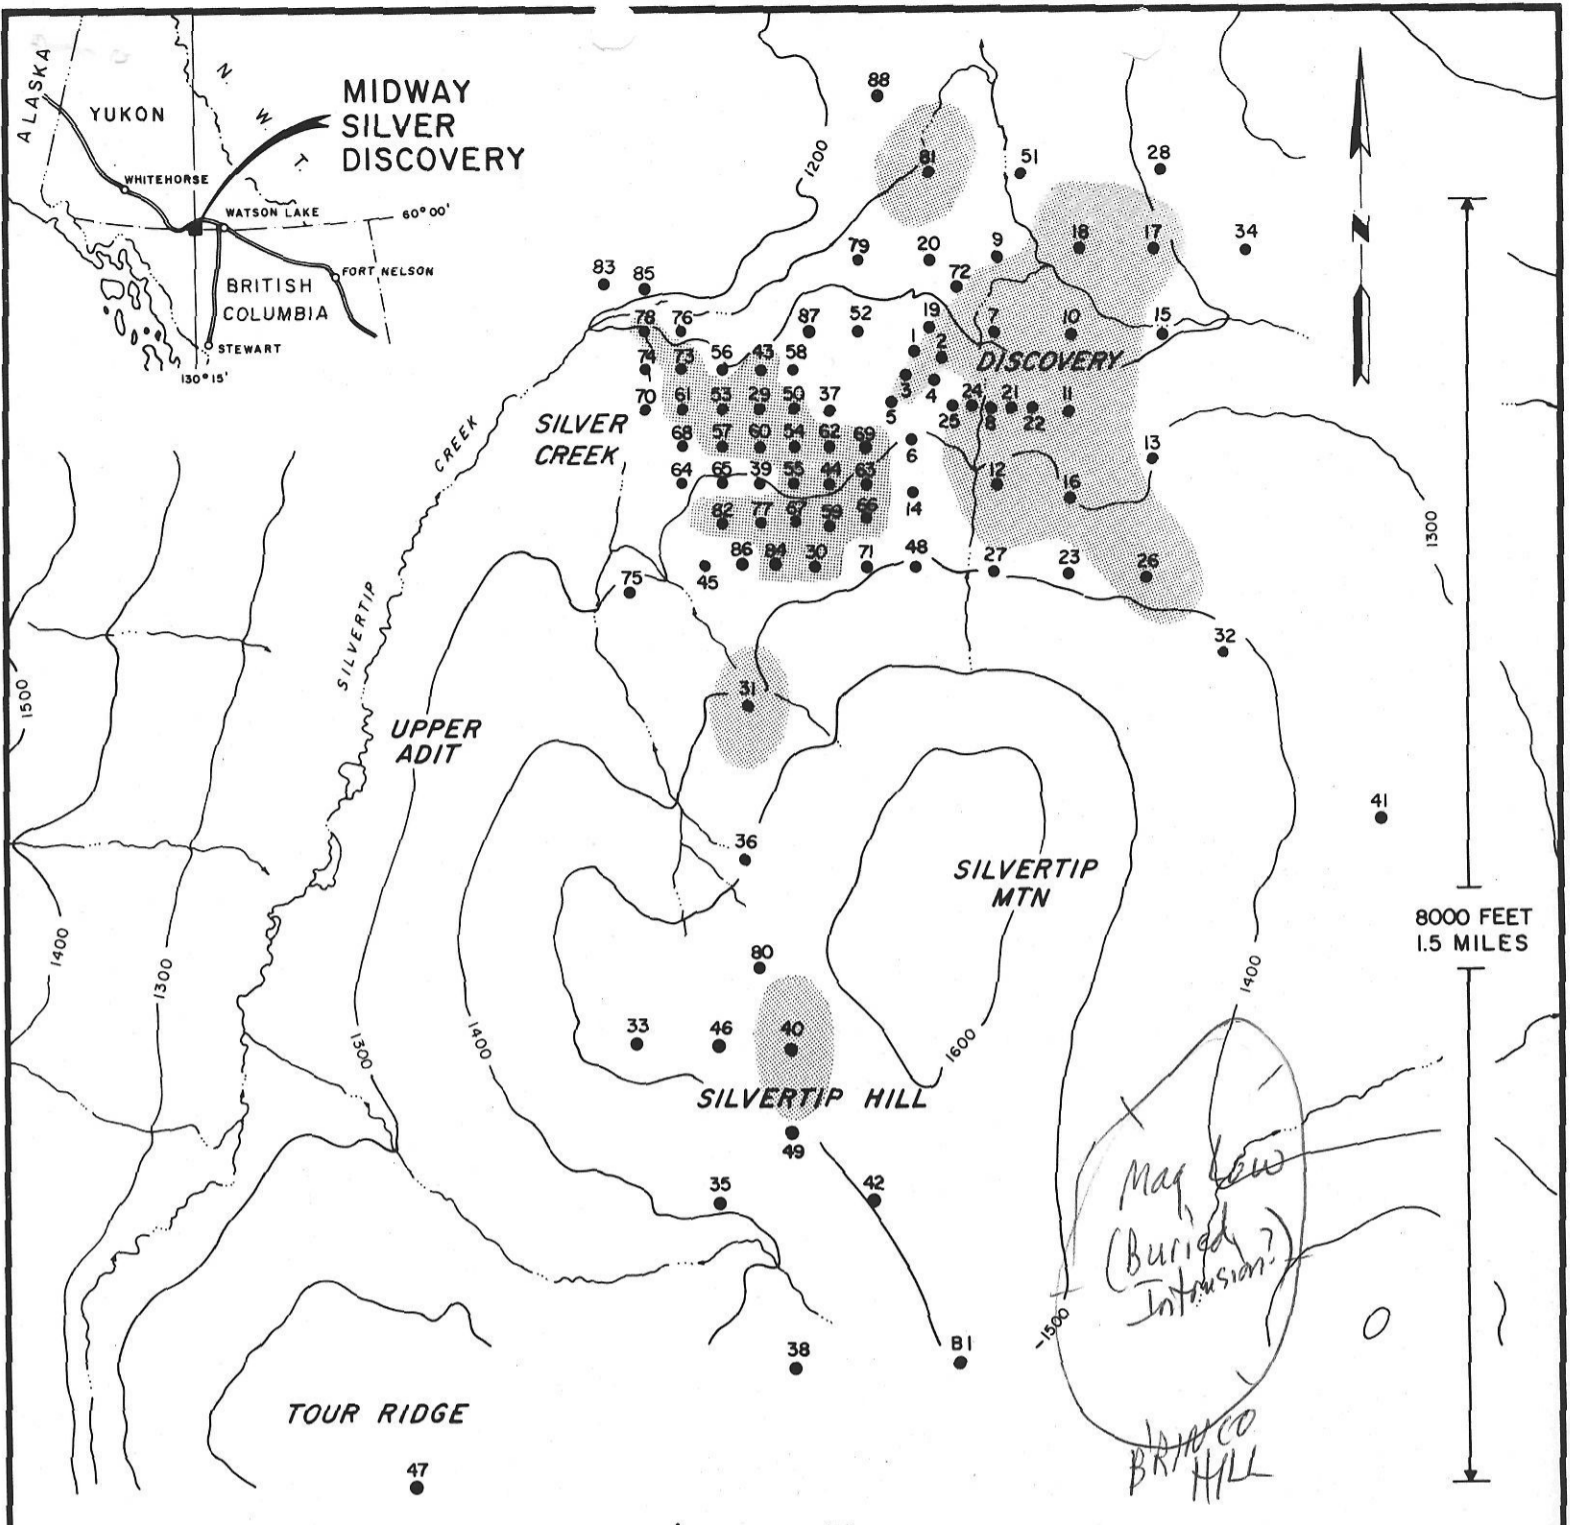

SUMMARY OF LOWER ZONE INTERSECTIONS

DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton	DDH	Inclination	Azimuth	FROM-TO (ft)	LENGTH (ft)	ZINC %	LEAD %	ZINC-LEAD %	SILVER oz/ton
81-1	-70°	330°	406.0- 410.0	4.0	6.92	4.06	10.98	4.89	83-31	-80°	270°	1545.0-1548.9	3.9	3.55	4.20	7.75	5.05
81-2	-70°	300°	465.9- 469.0	3.1	3.02	1.70	4.72	2.91	83-40	-80°	270°	1043.0-1049.7	6.7	6.60	4.34	10.94	10.10
81-3	-70°	300°	373.1- 381.1	8.0	5.24	11.80	17.04	16.18				1454.1-1455.0	0.9	1.69	48.27	49.96	68.20
81-5	-70°	300°	386.6- 390.9	4.3	1.87	0.86	2.73	1.27	83-43	-80°	270°	64.6- 77.7	13.1	1.35	10.15	11.50	14.10
82-7	-70°	270°	633.6- 650.0	16.4	4.85	3.07	7.92	11.05	83-44	-80°	270°	433.2- 438.8	5.6	7.32	1.65	8.97	3.80
82-8	-70°	270°	671.3- 700.5	29.2	15.80	10.58	26.38	20.15	83-50	-80°	270°	157.1- 195.5	38.4	0.50	1.51	2.01	3.31
			743.1- 746.4	3.3	10.10	14.15	24.25	24.00				208.0- 217.2	9.2	11.05	0.23	11.28	0.39
82-9	-70°	270°	650.6- 651.9	1.3	13.31	1.25	14.56	3.44	84-53	-90°	0°	196.9- 214.9	18.0	15.31	8.83	24.14	12.13
82-10	-70°	270°	823.2- 841.9	18.7	5.95	7.95	13.90	11.30	84-54	-90°	0°	262.8- 273.0	10.2	10.82	12.30	23.12	19.54
			743.1- 746.4	3.3	10.10	14.15	24.25	24.00	84-55	-80°	270°	426.2- 436.4	10.2	10.97	2.88	13.85	4.37
82-11	-80°	270°	1037.1-1046.0	8.9	15.54	7.80	23.34	17.40	84-57	-90°	0°	339.9- 369.8	29.9	11.36	12.94	24.30	17.40
82-12	-70°	270°	935.0- 940.0	5.0	6.95	7.48	14.43	12.98	84-59	-80°	270°	582.3- 588.2	5.9	23.65	2.21	25.86	4.77
82-13	-90°		1723.4-1723.9	0.5	11.00	5.25	16.25	8.37	84-60	-90°	0°	351.2- 392.7	41.5	9.23	15.34	24.57	21.30
82-16	-80°	270°	1257.9-1281.8	23.9	18.96	5.63	24.59	9.52	84-61	-90°	0°	220.8- 231.0	10.2	7.53	7.88	15.41	7.53
82-17	-80°	270°	1584.1-1588.7	4.6	21.39	1.78	23.17	13.80	84-62	-90°	0°	245.1- 253.9	8.8	5.66	3.83	9.49	9.25
82-18	-80°	270°	1015.8-1024.0	8.2	7.40	2.38	9.78	4.75	84-63	-80°	270°	459.3- 465.2	5.9	11.14	0.96	12.10	4.47
82-20	-80°	270°	532.5- 534.8	2.3	12.00	1.85	13.85	2.76				510.8- 516.7	5.9	12.00	2.59	14.59	3.50
83-21	-70°	270°	761.0- 774.6	13.6	7.45	5.90	13.35	8.13									
			861.9- 876.8	14.9	14.07	17.44	31.51	25.15									
83-23	-80°	270°	1694.3-1696.9	2.6	9.55	0.19	9.74	1.64									
83-24	-70°	270°	671.8- 673.9	2.1	8.30	11.20	19.50	19.80									
			687.7- 693.6	5.9	6.80	4.60	11.40	7.31									
83-26	-80°	270°	1853.7-1860.3	6.6	31.00	0.05	31.05	0.45									
83-27	-80°	270°	1254.3-1259.5	5.2	1.92	3.01	4.93	4.75									
83-29	-80°	270°	212.9- 223.4	10.5	14.92	11.43	26.35	18.10									
83-30	-80°	270°	901.2- 904.8	3.6	11.10	0.30	11.40	5.28									

*Assay based on 9.5 feet of core recovered

LEGEND

- DIAMOND DRILL HOLE
- 1300 ——— TOPOGRAPHIC CONTOUR IN METRES
- CREEK
- SILVER, ZINC, LEAD DEPOSIT

REGIONAL RESOURCES LTD.
DIAMOND DRILL HOLE PLAN
 MIDWAY
 SILVER ZINC LEAD PROPERTY

