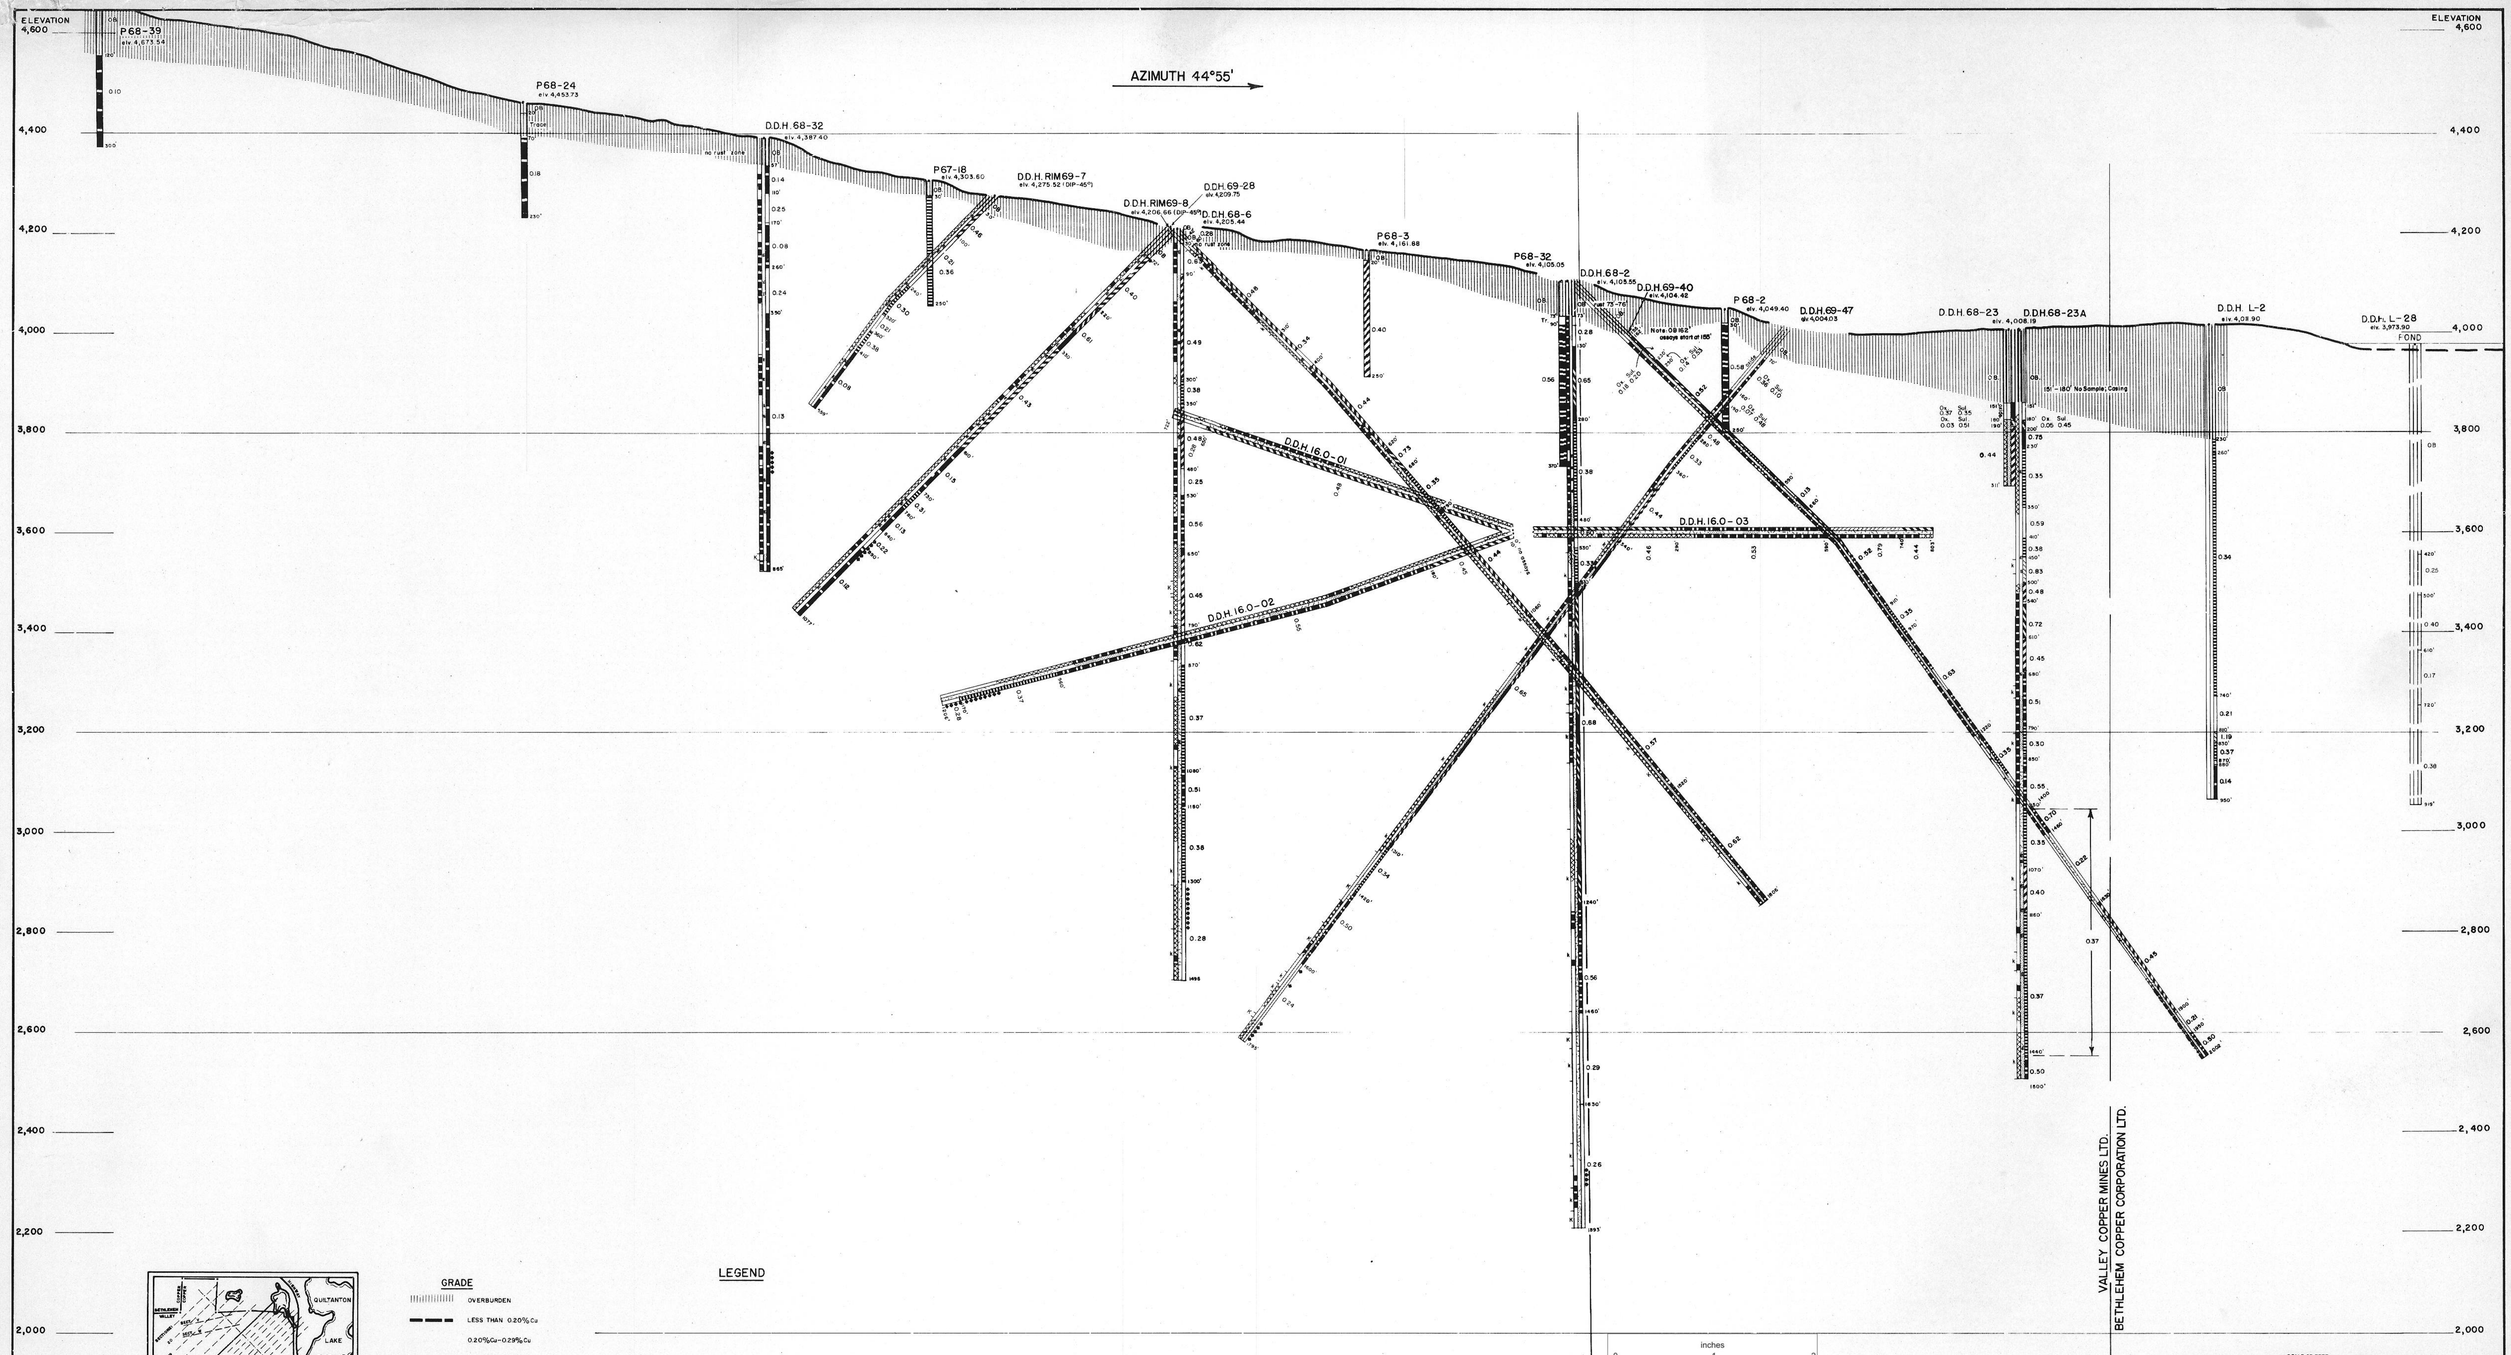
ELEVATION
4,600
4,400
4,200
4,000
3,800
3,600
3,400
3,200
3,000
2,800
2,600
2,400
2,200
2,000
1,800
AZIMUTH 44°55'
P68-39
elv. 4,677.54
P68-24
elv. 4,453.73
D.D.H. 68-32
elv. 4,387.40
P67-18
elv. 4,303.60
D.D.H. RIM69-7
elv. 4,275.52 (DIP-45°)
D.D.H. RIM69-8
elv. 4,206.66 (DIP-49°)
D.D.H. 69-28
elv. 4,209.75
D.D.H. 68-6
elv. 4,205.44
P68-3
elv. 4,161.88
P68-32
elv. 4,105.05
D.D.H. 68-2
elv. 4,105.55
D.D.H. 69-40
elv. 4,104.42
P68-2
elv. 4,049.40
D.D.H. 69-47
elv. 4,004.03
D.D.H. 68-23
elv. 4,008.19
D.D.H. 68-23A
D.D.H. L-2
elv. 4,031.90
D.D.H. L-28
elv. 3,973.90
FOND
D.D.H. 16.0-01
D.D.H. 16.0-02
D.D.H. 16.0-03
Note: 09.162' assays start at 155'
180' - 180' No Sample, Casing
REFERENCE LINE
VALLEY COPPER MINES LTD.
BETHLEHEM COPPER CORPORATION LTD.
SCALE OF FEET
0 25 50 100 150 250 350 500
Key Map
Scale 1" = 2,000'
QUILTANTON
LAKE
LEGEND
GRADE
OVERBURDEN
LESS THAN 0.20% Cu
0.20%Cu - 0.29%Cu
0.30%Cu - 0.39%Cu
0.40%Cu - 0.49%Cu
0.50%Cu - 0.59%Cu
0.60%Cu - 0.79%Cu
0.80%Cu OR GREATER
SERICITIC ALT.
MODERATE
STRONG
E EMERALD GREEN SERICITE
ARGILLIC ALT.
LOW
MODERATE
INTENSE
GEOLOGY
DYKES
POTASSIC ALT.
R LOW-MODERATE
K STRONG
inches
0 1 2
0 1 2 3 4 5
centimetres
BRITISH COLUMBIA GEOLOGICAL SURVEY
This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.
896546
VALLEY COPPER MINES LTD.
N.T.S. 92-I
Drawn by: S.S. Saito
Traced by:
Revised by Date
S.S. Saito Feb 15/70
S.S. Saito May 15/70
SECTION 16
Scale: 1 Inch = 100 Feet
Date: November, 1969
Plate: S-12