



TAYWIN RESOURCES LTD.

HOLE NO.	INTERVAL	WIDTH		GOLD	COPPER	COBALT
	METRES	METRES	FEET	OZ/T	%	%
89-1	6.8 - 8.0	1.2	4	2.57	3.37	2.00
	15.4 - 16.2	0.8	3	0.73	0.78	0.04
	20.0 - 21.0	1.0	3	0.11	0.17	0.02
	24.0 - 25.1	1.1	4	0.33	0.14	0.02
	30.0 - 32.0	2.0	7	0.20	0.18	0.02
	41.8 - 46.9	5.1	17	0.24	0.32	0.02
	58.0 - 61.0	3.0	10	0.26	0.09	0.02
89-2	14.4 - 15.4	1.0	3	0.49	1.04	0.08
	33.9 - 34.6	0.7	2	0.19	0.31	0.02
	*44.8 - 47.8	3.0	10	0.06	0.02	0.01
	*47.8 - 51.0	3.2	10	0.24	0.70	0.01
	63.5 - 64.5	1.0	3	0.12	0.03	--
89-6	29.5 - 43.0	13.5	44	0.26	0.60	0.01
	50.0 - 56.0	6.0	20	0.17	0.61	0.02
Avg:	29.5 - 60.5	31.0	102	0.15	0.42	0.01
89-7	58.5 - 72.5	14.0	46	0.39	0.21	0.09
89-8	72.0 - 74.5	2.5	8	0.41	0.25	0.02

\* Denotes 25% core recovery

HOLE NO	INTERVAL	WIDTH		GOLD	COPPER
	METRES	METERS	FEET	OZ/METRIC T	%
89-9	27 - 41	14	46	0.09	0.77
89-17	19 - 28	9	30	0.09	2.94
	33 - 66	33	108	0.11	0.57
89-18	33 - 36	3	10	0.16	N/A*
89-19	2 - 5	3	10	0.17	N/A
	20 - 23	3	10	0.39	N/A
	29 - 31	2	6.5	1.72	N/A
89-20	9 - 15	6	19.5	0.63	N/A
	24 - 28	4	13	0.62	N/A
	28 - 34	6	19.5	0.08	N/A
89-21	4 - 10	6	19.5	0.20	N/A

Note: Higher grade copper intervals contain up to one oz/metric ton of silver.

\* Not available yet.

HOLE NO	INTERVAL	WIDTH		GOLD	COPPER
	METRES	METRES	FEET	OZ/T	%
89-18	33 - 36	3	10	0.16	0.08
89-19	2 - 5	3	10	0.17	0.42
	20 - 23	3	10	0.39	1.01
	29 - 31	2	6.5	1.72	5.41
or	2 - 31	29	95	0.17	0.60
89-20	9 - 15	6	19.5	0.63	3.86
	24 - 28	4	13	0.62	0.55
	28 - 34	6	19.5	0.08	0.12
or	9 - 52.4	43.4	142.5	0.20	1.34
89-21	4 - 10	6	19.5	0.20	1.29
	or	4 - 57	53	174	0.09
89-22	16 - 33	17	56	0.14	0.40
	or	16 - 61	45	147.5	0.11
89-23	26 - 33	7	23	0.30	0.66
89-24	25 - 28	3	10	0.14	0.31
	34 - 41	7	23	0.10	0.42
	incl. 34 - 36	2	6.5	0.26	0.79
89-30	22 - 27	5	16.5	0.25	0.72
89-31	24 - 62	38	124.5	0.10	0.38
	incl. 52 - 61	9	29.5	0.25	0.66

*George*

WESTERN


NO. 207 (1989)  
OCTOBER 27, 1989

92L 44

P. 2

92L 46 →

92L44 p.3

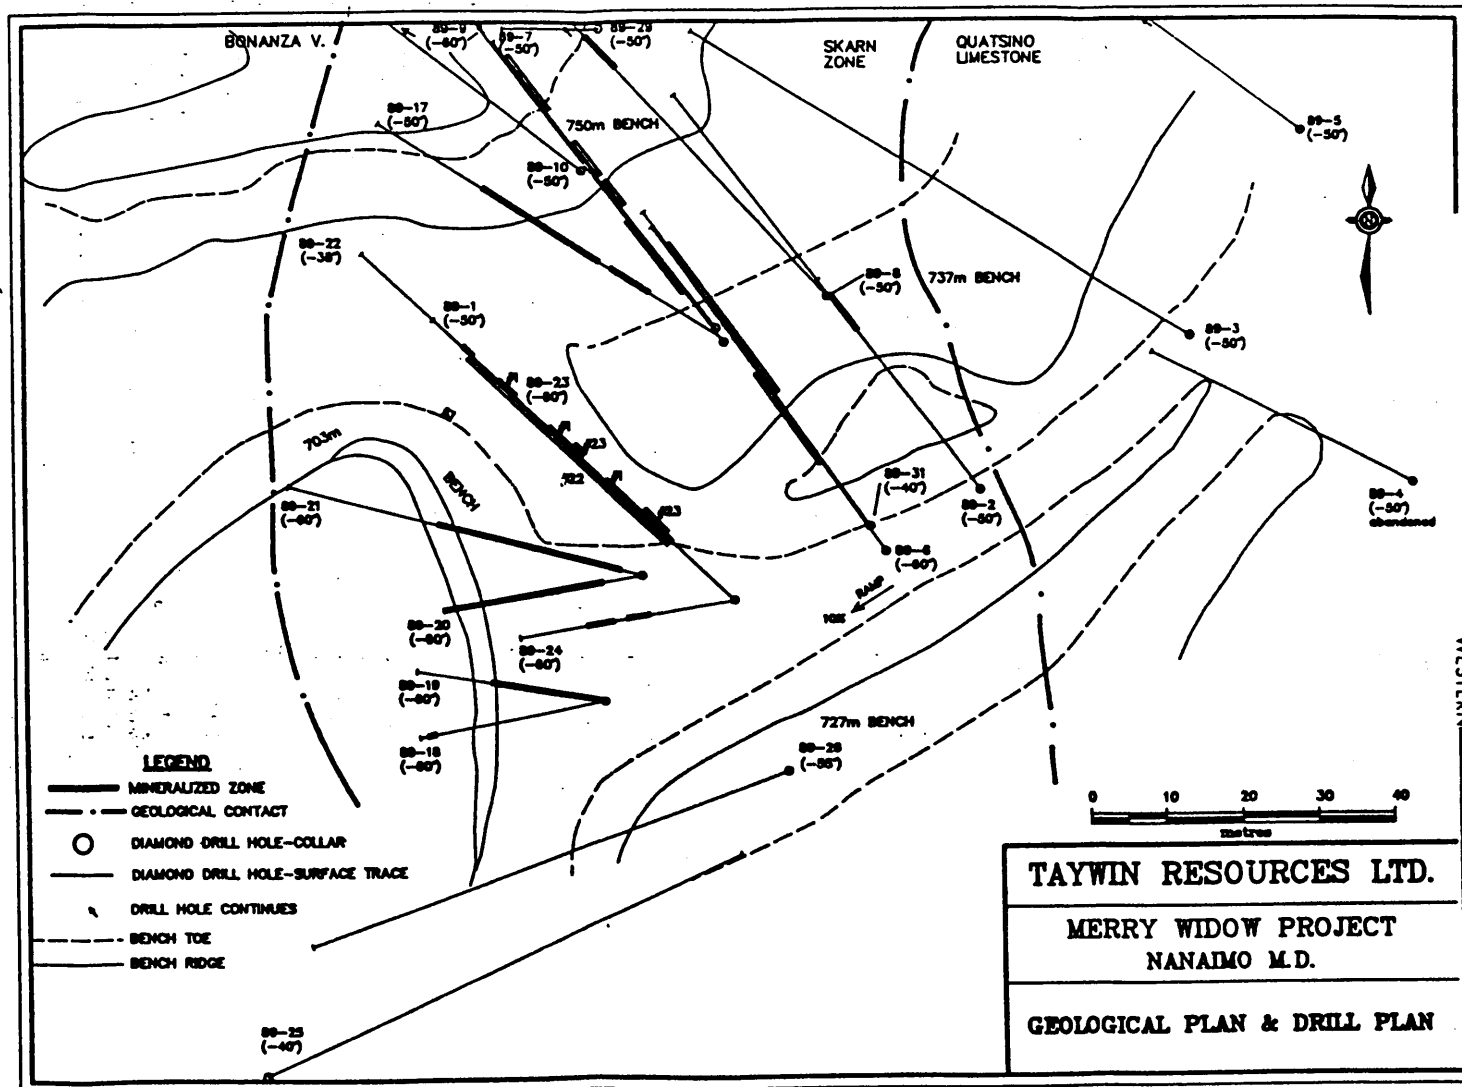

NO. 207 (1989)  
OCTOBER 27, 1989

George