

George Cross

NO. 230(1990)
NOVEMBER 28, 1990

Reliable &

WESTERN CANADIA

FAIRFIELD MINERALS LTD. (FFD-V,T)

| HOLE NO. | OZ. GOLD/T | HOLE NO. | OZ. GOLD/T | HOLE NO. | OZ. GOLD/T |
|----------|------------|----------|------------|----------|------------|
| 89-1 | 0.773 | 90-27 | 0.371 | 90-50 | 0.418 |
| 89-2 | .287 | 90-29 | .486 | 90-61 | .28 |
| 89-7 | .452 | 90-33 | 1.290 | 90-65 | .431 |
| 89-8 | .306 | 90-37 | .361 | 90-66 | 1.096 |
| 90-13 | .273 | 90-44 | .304 | 90-69 | .531 |
| 90-14 | 1.327 | 90-47 | .227 | 90-72 | .347 |
| 90-20 | .230 | 90-49 | .928 | 90-73 | .257 |

NOTE: All drill intersections are over 6.6 ft true width
SEE DRILL HOLE LOCATION MAP OVERLEAF PAGE 2.

John W. Stollery, P.Eng., president of Fairfield Minerals has reported the Siwash North gold deposit on the Elk property 25 miles southeast of Merritt, B.C. has been traced by 70 widespread drill holes over 2,500 feet strike length and 800 feet down dip. The deposit is open to extension. He said 93% of the holes intersected quartz vein structures and several returned excellent gold assays distributed evenly throughout the system.

The Lake zone, south of Siwash North, was tested with four holes which encountered a well mineralized structure with sulphides containing gold. Surface work has outlined a 1,500 foot strike length yet to be tested.



Surface exploration on the Dill property, 10 miles south of the Elk, has outlined an area 4,600 feet by 2,000 feet, of coincident copper, gold geochemical and induced polarization chargeability highs. Trenching and drilling in the 1960's located widespread copper. One hole graded 0.17% copper over 970 feet and another averaged 0.26% copper over 680 feet including 130 feet of 0.40% copper. Some of the core samples were analyzed for gold returning up to 0.02 oz. gold/t.

Fairfield owns nine properties in the Okanagan area of which 3 are under option to Placer Dome. (See GCNL NO.161, Aug.21,1990, for much detail)

92HNE 111

→ P. 1 of 2

* 1.012 oz/ton GOLD / 22 CUTS / 380 ft. - OUNCES PER TON GOLD OVER 6.6 ft. TRUE WIDTH / NUMBER OF SURFACE PANEL CUTS TAKEN ACROSS ZONE EVERY 15 - 20 ft. ALONG STRIKE / LENGTH OF ZONE SAMPLED

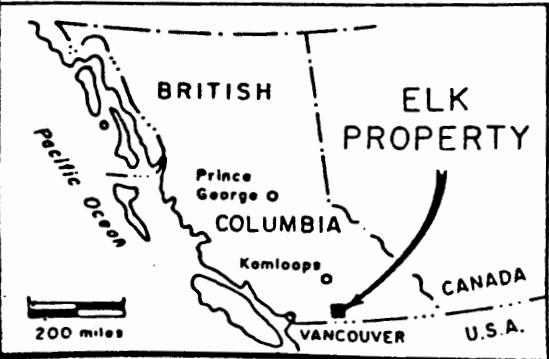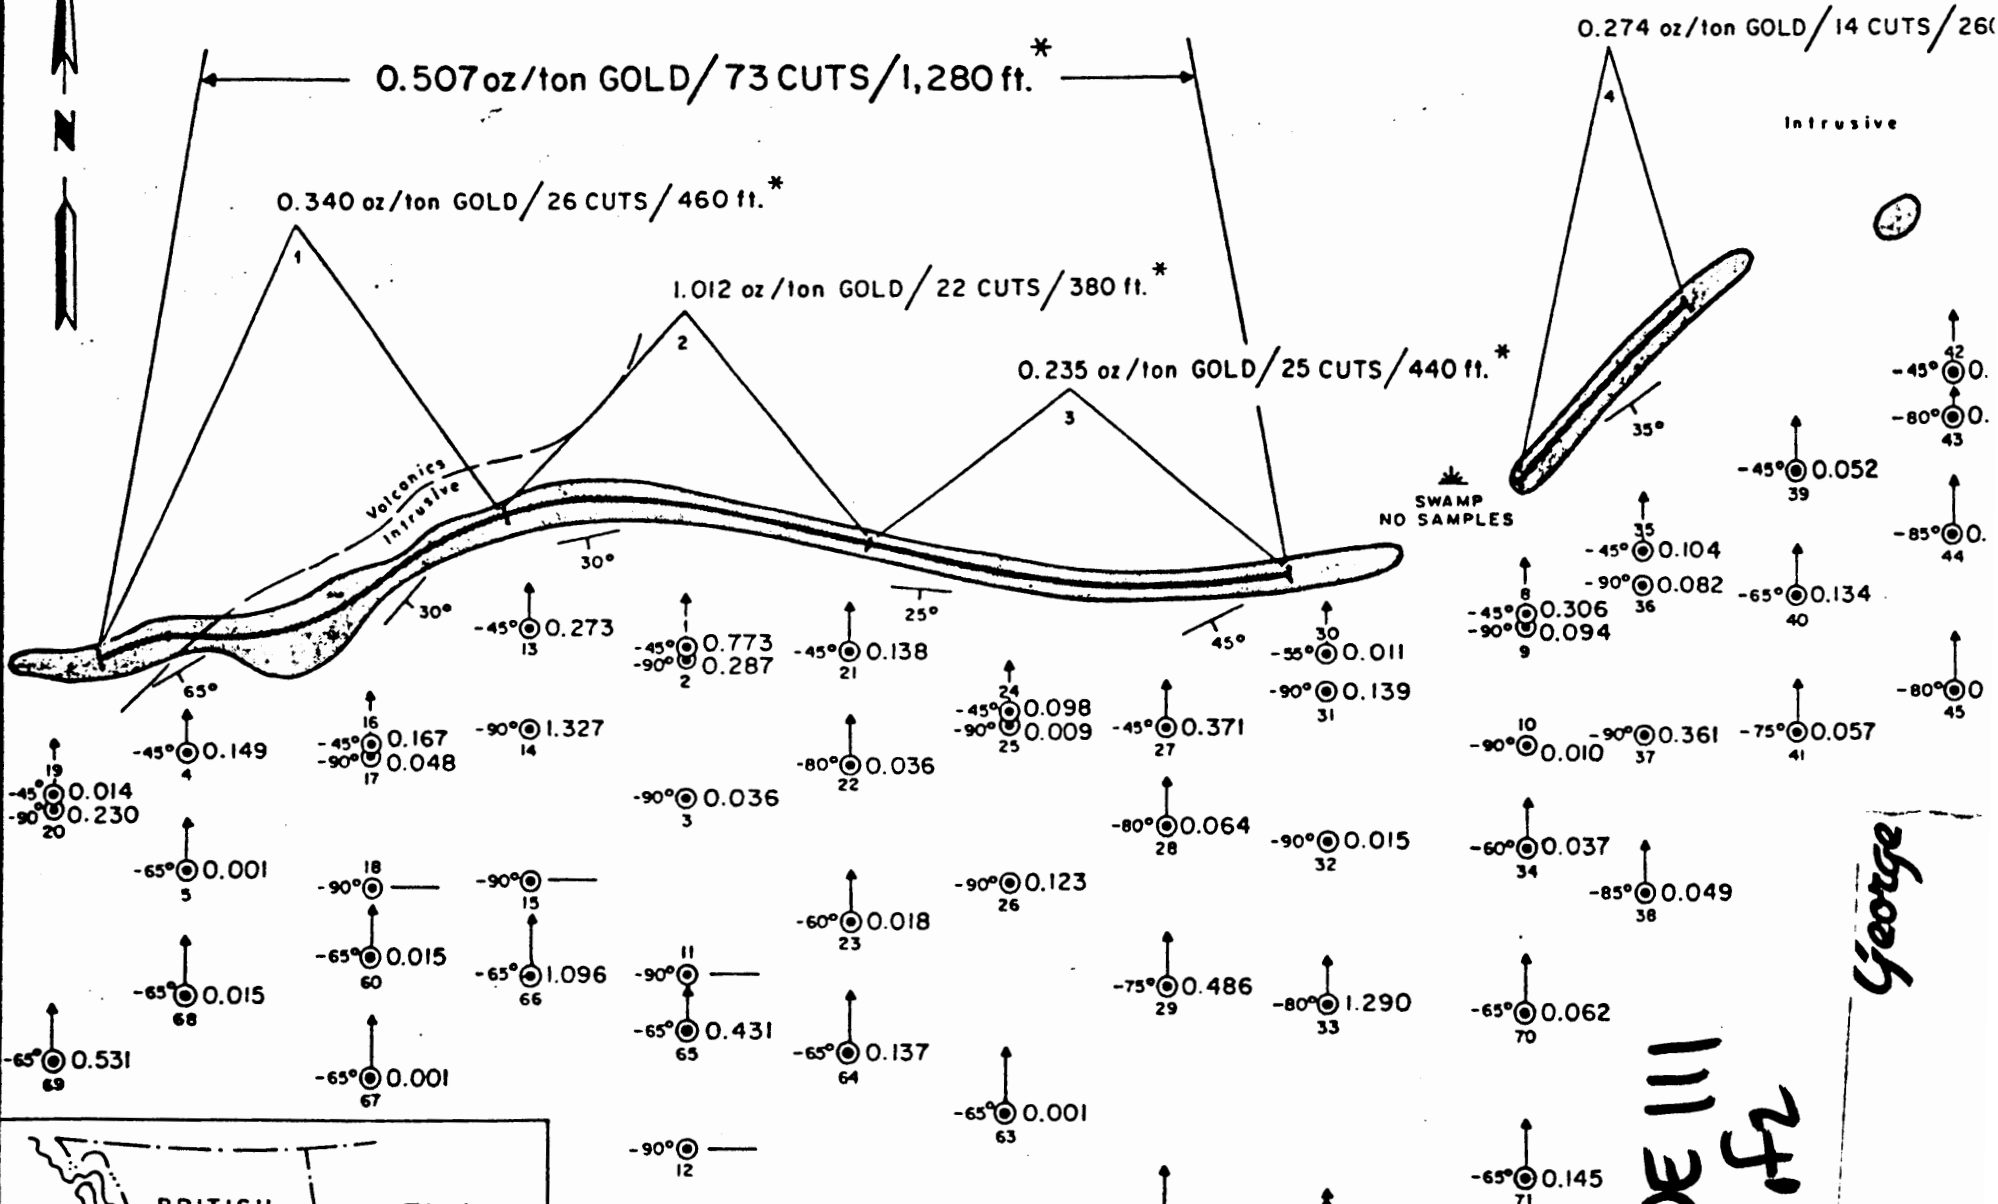

DIAMOND DRILL HOLE
oz/ton GOLD
OVER 6.6 ft. TRUE WIDTH

HOLE 1 - 12 DRILLED IN 1989
REMAINDER IN 1990

HOLE 11, 12, 15, 18
STOPPED SHORT OF ZONE

○ STRIPED AREA

92HNE 111
P.2 of 2

George