

1710 - 609 GRANVILLE ST
PO BOX 10363
VANCOUVER BC
CANADA V7Y 1G5
(604) 683-7265 FAX 683-5306
BBS 683-7206

George Cross News Letter

"Reliable Reporting"

WESTERN CANADIAN INVESTMENTS

COPYRIGHT
ALL REPRODUCTION
RIGHT RESERVED
PUBLISHED DAILY
SUBSCRIPTION RATE
\$315.00 PER YEAR

NO. 217 (1995)
NOVEMBER 10, 1995

NO. 217 (1995)
NOVEMBER 10, 1995

HERA RESOURCES INC.

[HRR-V] 5,099,006 SHS.

FURTHER NAK DRILL RESULTS - David Hjerpe, president, Hera Resources Inc., reports more assay results from the recent reconnaissance drill program on its 100%-optioned NAK property, a Babine-type porphyry copper-gold prospect about 30 km northeast of Babine Lake, 80 km northwest of Smithers, B.C. SEE MAP OVERLEAF P.3 & ASSAY TABLE OVERLEAF P.4. The drill program in its early stages has defined a system, relative to other alteration zones in the Babine Lake region, that could easily accommodate the nearby Bell Copper, Granisle, and Morrison porphyry deposits.



The recent reconnaissance drill program completed 31,000 feet in 43 holes, with assays reported from 29, and the balance of assays awaited, before being suspended for the winter. The company is encouraged and expects to resume exploration in early 1996.

Hera also completed reconnaissance induced polarization survey on the Trail Peak copper/ gold porphyry property 55 km northwest of the NAK property. A 1996 exploration program is planned.

Hera Resources holds a 22.8% interest (2,100,000 shares) in INTERNATIONAL TAURUS RESOURCES INC. [ITU-V]. (SEE GCNL NO.182, 21Sep95, P.1 FOR PREVIOUS NAK PROJECT DRILL RESULTS)

93M 10
p. 1 of 3

**NAK PROPERTY SIZE vs.
 BELL COPPER, GRANISLE & MORRISON DEPOSIT**

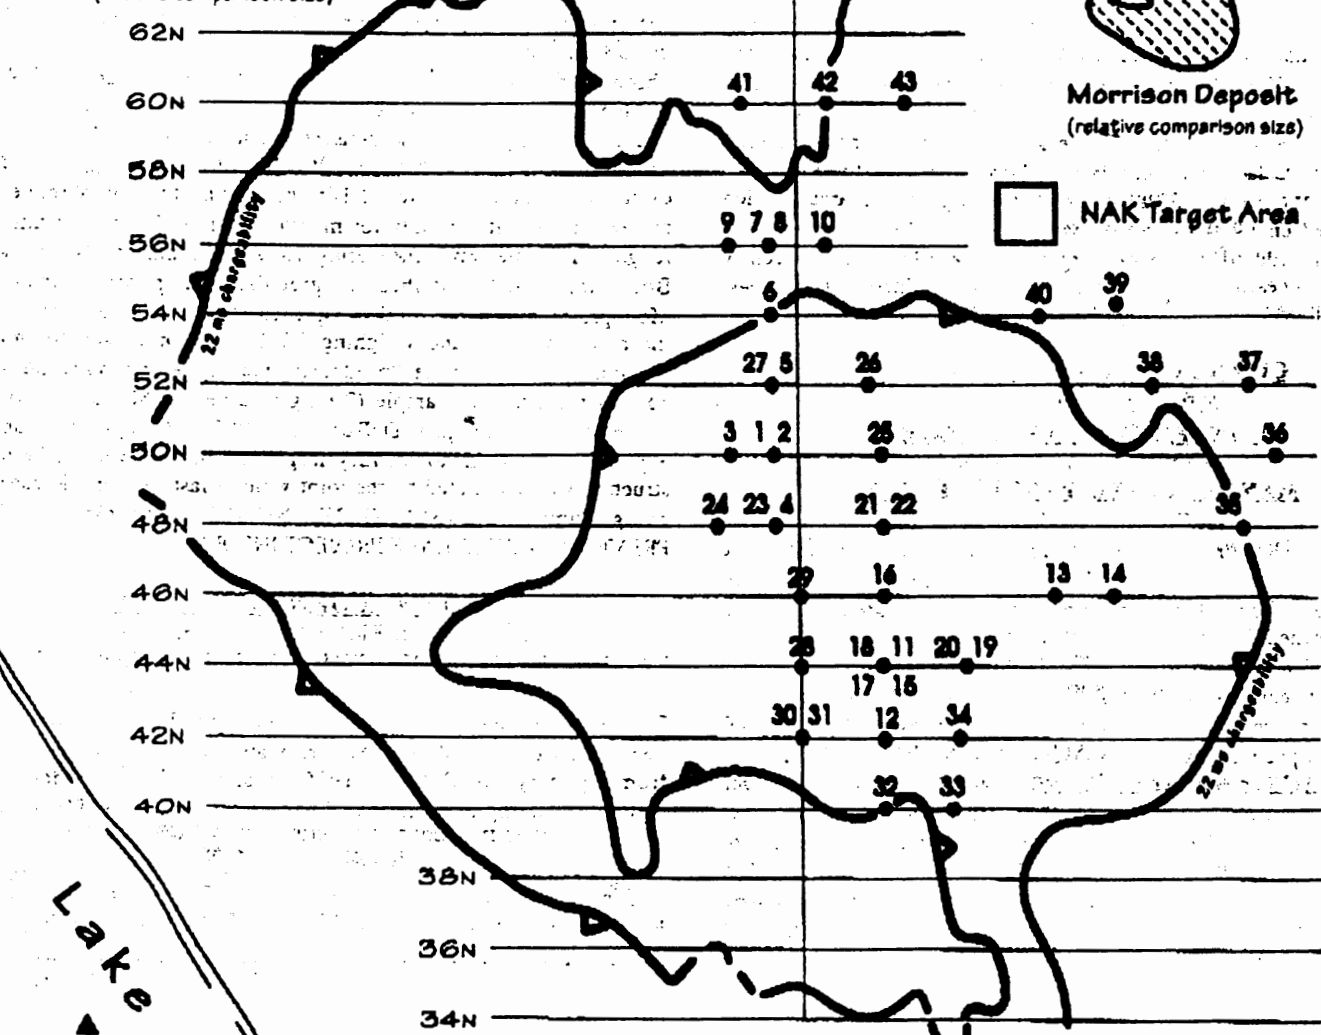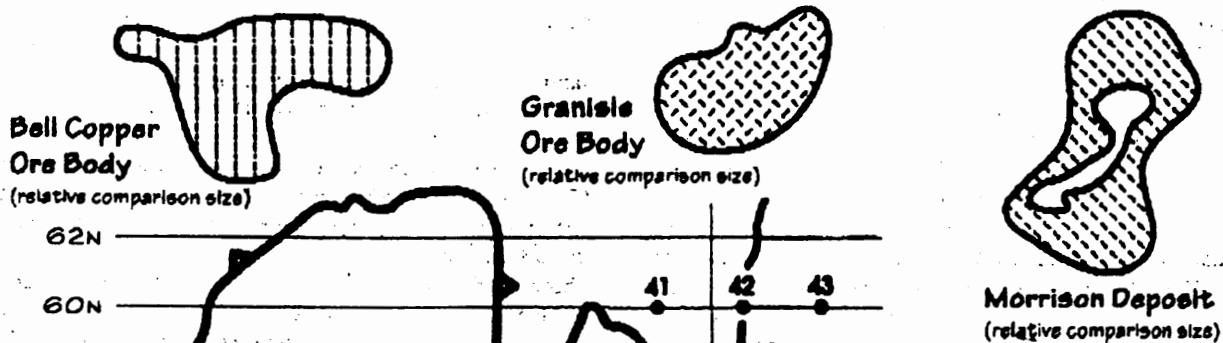

**HERA RESOURCES INC.
 NAK Property**

80 Km northeast of Smithers, B.C.

HERA RESOURCES INC.

NAK COPPER/GOLD PROPERTY

BABINE LAKE REGION
80 Km northeast of Smithers, B.C.

DRILL RESULTS

HOLE #	COLLAR LOCATION	AZIMUTH	DIP	FROM (m)	TO (m)	INTERVAL (metres)	INTERVAL (feet)	% Cu	g. Au/t		
95 - 22	48+00N, 27+20E	90°	61	31.1	115.8	84.7	277.9	0.15	0.072		
95 - 23	48+00N, 24+50E	255°	50	18.3	242.4	224.1	735.3	0.20	0.020		
Incl.				18.3	152.4	134.1	440.0	0.30	0.028		
95 - 24	48+00N, 23+00E	270°	50	32.0	219.5	187.5	615.2	0.10	0.007		
Incl.				32.0	82.3	50.3	165.0	0.27	0.012		
95 - 25	50+00N, 27+00E	270°	50	24.4	451.1	426.7	1400.0	0.20	0.041		
Incl.				333.3	451.1	117.8	386.5	0.36	0.074		
95 - 26	52+00N, 26+50E	275°	50	9.1	356.6	347.5	1140.1	0.11	0.023		
Incl.				216.0	356.6	140.6	461.3	0.14	0.031		
95 - 27	52+00N, 24+40E	270°	53	7.6	289.6	282.0	925.2	0.12	0.013		
Incl.				7.6	152.0	144.4	473.8	0.19	0.010		
95 - 28	44+00N, 25+00E	280°	52	57.9	207.3	149.4	490.2	0.06	0.050		
95 - 29	46+00N, 25+00E	280°	60	Abandoned in Overburden							

93M 10
p. 3 of 3