

1710 - 609 GRANVILLE ST
PO BOX 10363
VANCOUVER BC
CANADA V7Y 1G5
(604) 683-7265 FAX 683-5306

George Cross News Letter

"Reliable Reporting"

WESTERN CANADIAN INVESTMENTS

COPYRIGHT
ALL REPRODUCTION
RIGHT RESERVED
PUBLISHED DAILY
SUBSCRIPTION RATE
\$350.00 + GST

NO. 208 (1996)
OCTOBER 28, 1996

NO. 208 (1996)
OCTOBER 28, 1996

TEUTON RESOURCES CORP.

[TUO-V] 9,871,050 SHS.

MINVITA ENTERPRISES LTD.

[MVE-V] 4,528,159 SHS.

ADDITIONAL GOOD GRADE GOLD VALUES - Teuton Resources
REPORTED FROM CLONE PROJECT 50% and Minvita
Enterprises 50% have
reported new assays from 49 diamond drill holes, No. CL-96-47
through CL-96-95, on the ~~Clone property, 20 km southeast of~~
~~Stewart, BC.~~ Results from an additional 30 holes are pending from
the final stage of drilling which was completed October 18th. (SEE
TABLE OF ASSAYS OVERLEAF P.1 AND DRILL HOLE LOCATION
SKETCH OVERLEAF P.2)

Upon completion of the BTW size drilling (Hole CL-96-67),
Teuton and Minvita undertook a program of detailed NQ 2 size
drilling which yields core 2 inches in diameter (60% larger than the
BTW size core). This has resulted in better core recovery as well as
providing a larger and more representative sample. Detailed, close-
spaced drilling along 300 feet of the 1,080 feet of outlined gold-
bearing H-1 zone intersected visible gold in 25% of the holes. This
drilling aided in interpretation of structural offsets of the gold-
bearing zones.

Intersections along 300 feet of detail tested H-1 zone are
presented overleaf P.2. Results are considered quite encouraging
with grades ranging up to 1.293 oz/ton and drill intercepts up to
50.9 feet (estimated true width 36.0 ft). The wide intersections
reported in holes CL-96-91 to 93 appear to mark the beginning of a
significant zone of dilation in the H-1 structure and underscore the
rapid thickness changes that can be expected with this style of
mineralization.

Holes CL-96-56 to CL-96-67 tested the northern extensions of
the gold-bearing H-1 and S-2A shear structures. Most of this drilling
was conducted on a 50 metre (164 ft) spacing and except for three
holes (CL-96-58 to 60), was angled to the northwest. Generally two
holes were drilled from each set-up with holes angled at -45° and
-60°. The drilling was successful in tracing the H-1 and to a certain
degree the S-2A zone where it was obscured by overburden and snow.
Based on the BTW size drilling, the H-1 zone has a drill defined
strike length of at least 1,080 feet and has a vertical extension of at
least 774 feet. Extensions of the H-1 zone remain open in both the
southeast and northwest directions as well as down-dip.

Drill holes CL-96-47 and 48 tested a zone of magnetite
mineralization outcropping at the southeast end of the Clone shear
zone. Seven shallow holes, CL-96-49 to 55 were also drilled at the
southeast end of the Clone shear zones to test the H-3 zone. These
holes contained anomalous to low-grade gold values only.

The remaining 30 drill holes of the 1996 program targeted the
gold-cobalt mineralized zones in the vicinity of trenches No. 93 and
No. 95 and continued the H-1 detail drilling along strike and at
depth.

Teuton and Minvita's objective is to define the mineral resource
of the H-1 zone that has been outlined. It is anticipated a
preliminary resource calculation can be completed after drill results
from the entire 1996 program have been received.


Homestake Canada Inc. and Prime Resources Group Inc.,
technical advisors on Clone property exploration, have a right of
first refusal on any future financing of the Clone or on its
disposition to a third party.

103P 251
P. 1 of 3

TEUTON RESOURCES CORP./MINVITA ENTERPRISES LTD.

NO. 208 (1996)
OCTOBER 28, 1996

NO. 208 (1996)
OCTOBER 28, 1996

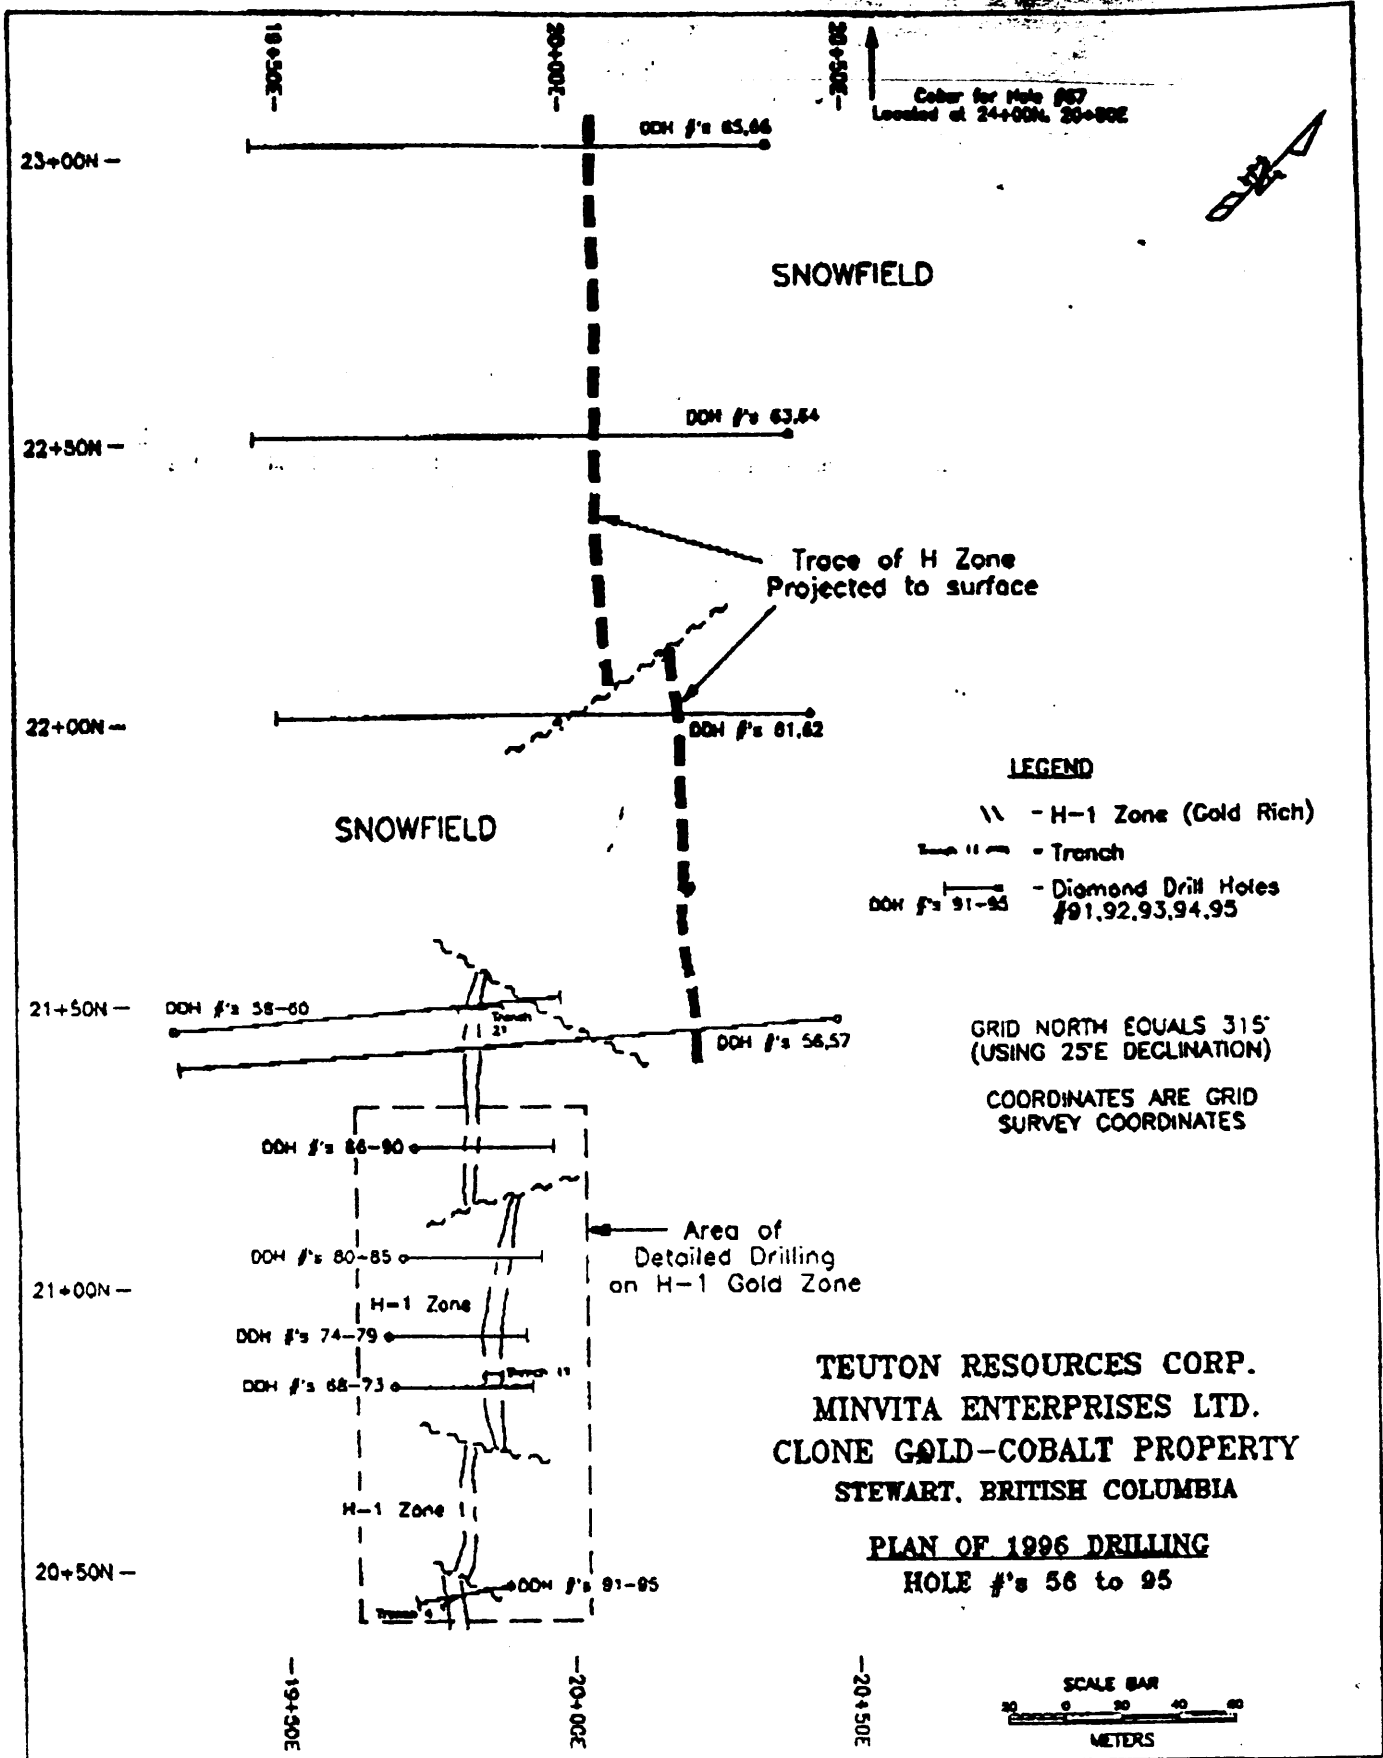

103P 251 p. 2 of 3

TEUTON RESOURCES CORP.
MINVITA ENTERPRISES LTD.

CLONE PROPERTY
20 KM. SOUTHEAST OF STEWART, BC

TABLE 1

Set up	Drill Hole	Dip	From (m)	To (m)	Width (m)	Au (opt)	Co %	Gold Equivalent ³
81	CL96-68	45	18.0	28.9	8.9	1.283	-	1.283
	CL96-69	80	18.7	28.8	8.9	0.810	-	0.810
	CL96-71	80	32.3	34.4	2.2	0.886	-	0.886
	CL96-72	70	47.7	75.2	27.5	0.380	-	0.380
82	CL96-74	45	8.8	12.8	3.1	0.827	-	0.827
	CL96-75	85	18.0	24.8	6.8	0.287	-	0.287
	CL96-76	85	21.3	27.8	6.5	0.380	-	0.380
	CL96-77	75	32.8	82.7	49.9	0.317	-	0.317
	CL96-78	85	88.4	72.2	16.2	0.188	0.027	0.222
	CL96-79	80	47.8	85.8	38.0	0.082	0.054	0.148

¹ Drill holes CL-66-70, 73, 83, 89, 90 and 94 contained no significant intervals of mineralization.

² Drill indicated width.

³ Based on a gold price of \$380 US/oz and a cobalt price of \$19 per pound (current cobalt spot market price is \$22.30 per pound).

83	CL96-80	45	48.0	81.8	2.8	0.127	0.638	0.188
	CL96-81	85	58.2	81.8	3.8	0.888	0.114	0.700
	CL96-82	85	83.8	87.3	3.4	0.331	0.022	0.383
	CL96-84	85	88.8	88.4	0.4	0.083	-	0.083
	CL96-85	80	205.1	218.6	11.5	0.801	0.083	0.884
84	CL96-86	45	32.8	38.1	3.3	0.100	0.048	0.148
	CL96-87	85	48.8	54.1	5.3	0.102	0.077	0.178
85	CL96-81	45	8.2	88.1	80.9	0.228	-	0.228
	(including)		8.2	23.0	14.8	0.538	-	0.588
	CL96-82	85	11.8	38.1	26.3	0.177	-	0.177
	CL96-83	85	27.8	87.8	60.0	0.237	-	0.237
	(including)		42.7	50.1	7.4	0.823	-	0.823
CL96-85	85	285.3	315.0	19.7	0.240	0.131	0.371	

TABLE 2

Drill Hole	Dip	From (m)	To (m)	Width (m)	Au (opt)	Co %	Gold Equivalent ³
CL96-88	80	383.7	402.3	8.6	0.078	0.018	0.084
CL96-87	80	448.5	488.3	9.8	0.083	-	0.083
		282.2	282.0	0.2	0.087	0.018	0.088
CL96-88	Lost						
CL96-89	45	82.3	87.3	5.0	0.087	-	0.087
CL96-80	80	198.9	218.8	19.7	0.113	0.032	0.145
		108.8	115.8	9.2	0.140	-	0.140
		228.9	233.7	6.8	0.055	0.030	0.085
		300.2	311.7	11.5	0.080	-	0.080

⁴ Drill holes CL-96-62 and 67 contained no significant intervals of mineralization.

⁵ Drill indicated width.

⁶ Based on a gold price of \$380 US/oz and a cobalt price of \$19 per pound (current cobalt spot market price is \$22.50 US/pound).

CL96-81	45	150.0	153.8	3.8	0.117	-	0.117
		188.3	188.7	2.4	0.289	0.123	0.382
		238.8	242.8	3.3	0.087	-	0.087
CL96-83	45	157.8	187.3	8.8	0.173	-	0.173
		242.8	282.8	8.8	0.082	0.023	0.085
		352.7	387.5	14.8	0.082	-	0.082
CL96-84	80	228.7	232.8	3.3	0.120	-	0.120
CL96-85	45	188.9	200.1	3.3	0.100	-	0.100
		358.0	364.2	8.2	0.078	-	0.078
		405.2	408.8	1.8	0.894	-	0.894
CL96-86	80	317.8	331.4	13.5	0.033	0.080	0.093

NO. 208 (1996)
OCTOBER 28, 1996

NO. 208 (1996)
OCTOBER 28, 1996

103P 251
P. 30f3