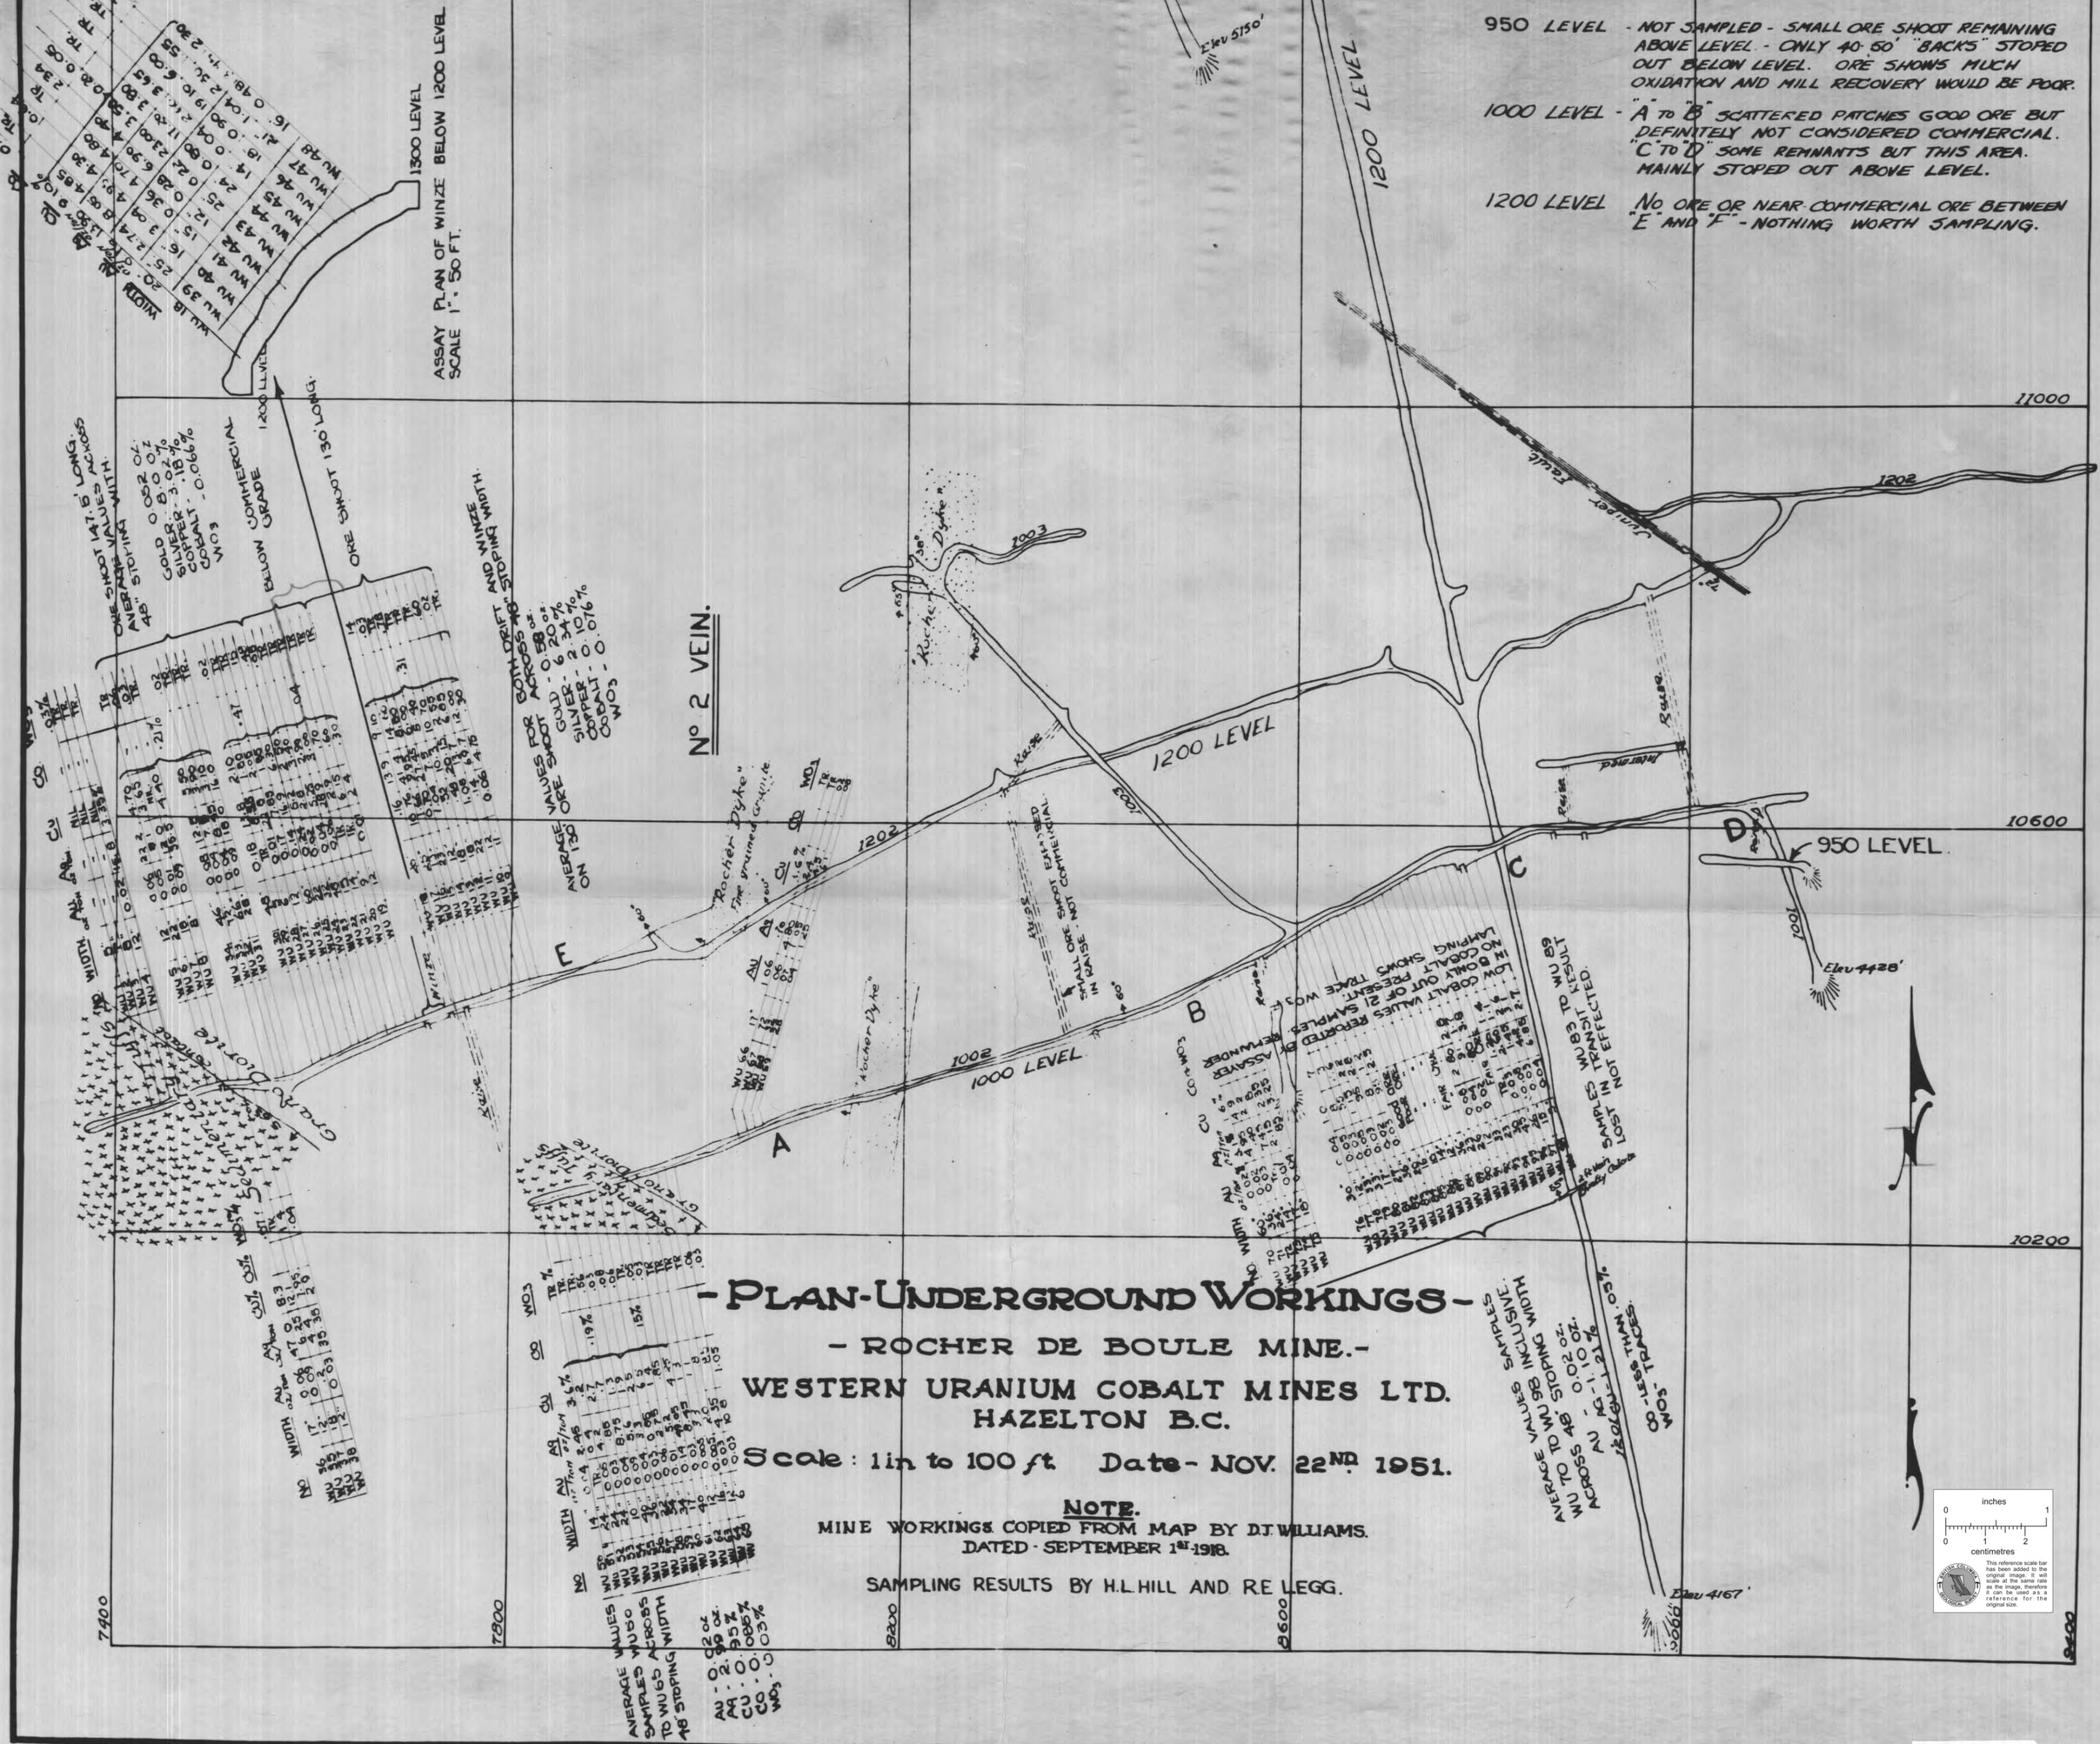
950 LEVEL - NOT SAMPLED - SMALL ORE SHOOT REMAINING ABOVE LEVEL - ONLY 40-50' "BACKS" STOPED OUT BELOW LEVEL. ORE SHOWS MUCH OXIDATION AND MILL RECOVERY WOULD BE POOR.
1000 LEVEL - "A" TO "B" SCATTERED PATCHES GOOD ORE BUT DEFINITELY NOT CONSIDERED COMMERCIAL. "C" TO "D" SOME REMNANTS BUT THIS AREA. MAINLY STOPED OUT ABOVE LEVEL.
1200 LEVEL NO ORE OR NEAR-COMMERCIAL ORE BETWEEN "E" AND "F" - NOTHING WORTH SAMPLING.
1300 LEVEL
ASSAY PLAN OF WINZE BELOW 1200 LEVEL SCALE 1" = 50 FT.
1200 LEVEL
ORE SHOOT 130' LONG.
BELOW COMMERCIAL GRADE
ORE SHOOT 147.5' LONG. AVERAGE VALUES ACROSS 48" STOPING WIDTH.
GOLD 0.052 OZ.
SILVER 8.0 OZ.
COPPER 3.02%
COBALT .18%
WO3 0.066%
AVERAGE VALUES FOR BOTH DRIFT AND WINZE ON 130' ORE SHOOT ACROSS 48" STOPING WIDTH.
GOLD 0.58 OZ.
SILVER 6.20%
COPPER 2.34%
COBALT 0.10%
WO3 0.076%
No 2 VEIN.
1200 LEVEL
1000 LEVEL
950 LEVEL
Elev 5150'
Elev 4428'
Elev 4167'
Juniper Fault
Rocher Dyke
Sedimentary Tuffs
Granodiorite
SMALL ORE SHOOT EXPOSED IN RAISE - NOT COMMERCIAL
LOW COBALT VALUES REPORTED BY ASSAYER IN 8 ONLY OUT OF 21 SAMPLES. REMAINDER NO COBALT PRESENT. LAMPING SHOWS TRACE WO3
SAMPLES WU 83 TO WU 89 LOST IN TRANSIT RESULT NOT EFFECTED.
AVERAGE VALUES SAMPLES WU 70 TO WU 98 INCLUSIVE. ACROSS 48" STOPING WIDTH
AU - 0.02 OZ.
AG - 1.10 OZ.
CO - LESS THAN .05%
WO3 - TRACES.
AVERAGE VALUES SAMPLES WU 50 TO WU 65 ACROSS 48" STOPING WIDTH
AU - 0.02 OZ.
AG - 2.99 OZ.
CU - 0.95%
CO - 0.085%
WO3 - 0.03%
11000
10600
10200
7400
7800
8200
8600
9000
9400
A
B
C
D
E
F
- PLAN - UNDERGROUND WORKINGS -
- ROCHER DE BOULE MINE. -
WESTERN URANIUM COBALT MINES LTD.
HAZELTON B.C.
Scale: 1 in to 100 ft. Date - NOV. 22ND 1951.
NOTE.
MINE WORKINGS COPIED FROM MAP BY D.J. WILLIAMS.
DATED - SEPTEMBER 1ST 1918.
SAMPLING RESULTS BY H.L. HILL AND R.E. LEGG.
inches
centimetres
This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

016131