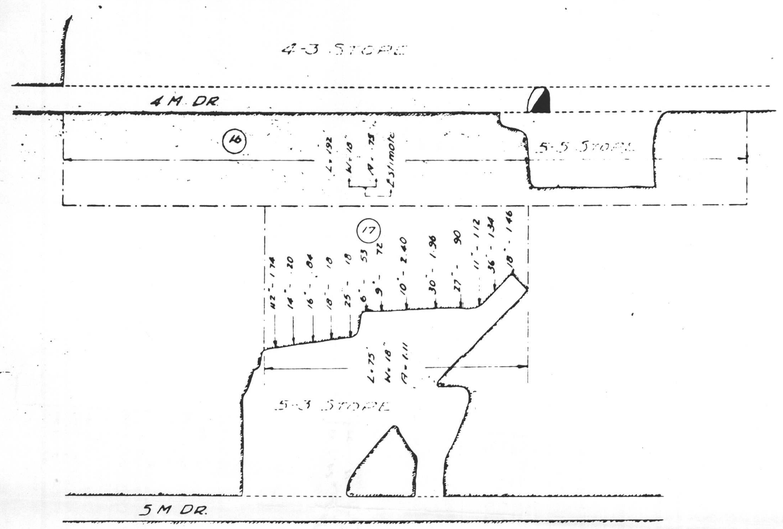

VERTICAL PROJECTION
MAIN VEIN
Showing
ORE RESERVES - 5-3 STOPE
Scale 1"=20'

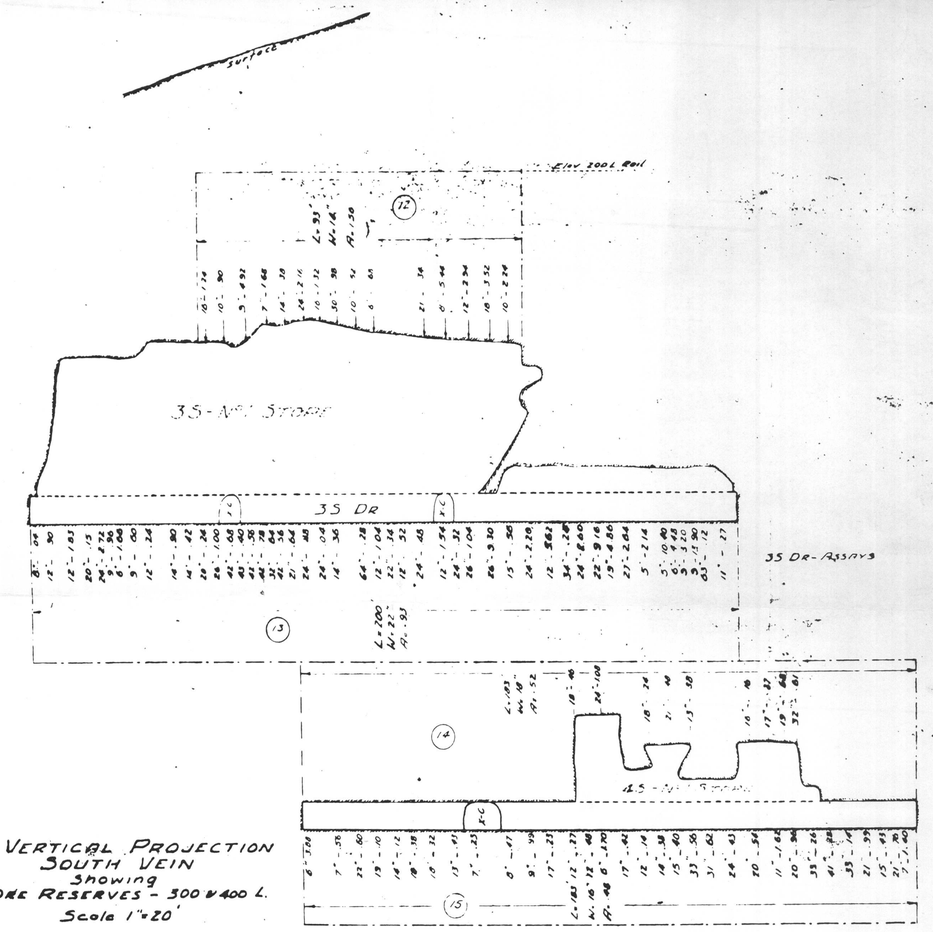

VERTICAL PROJECTION
SOUTH VEIN
Showing
ORE RESERVES - 300 & 400 L.
Scale 1"=20'

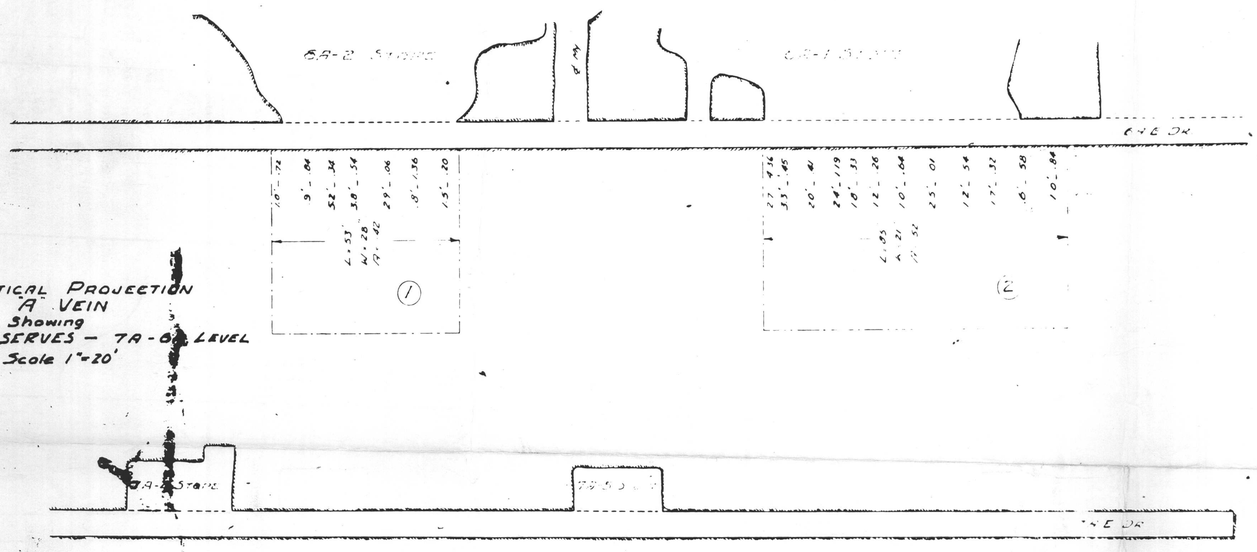

VERTICAL PROJECTION
"A" VEIN
Showing
ORE RESERVES - 7A-6A LEVEL
Scale 1"=20'

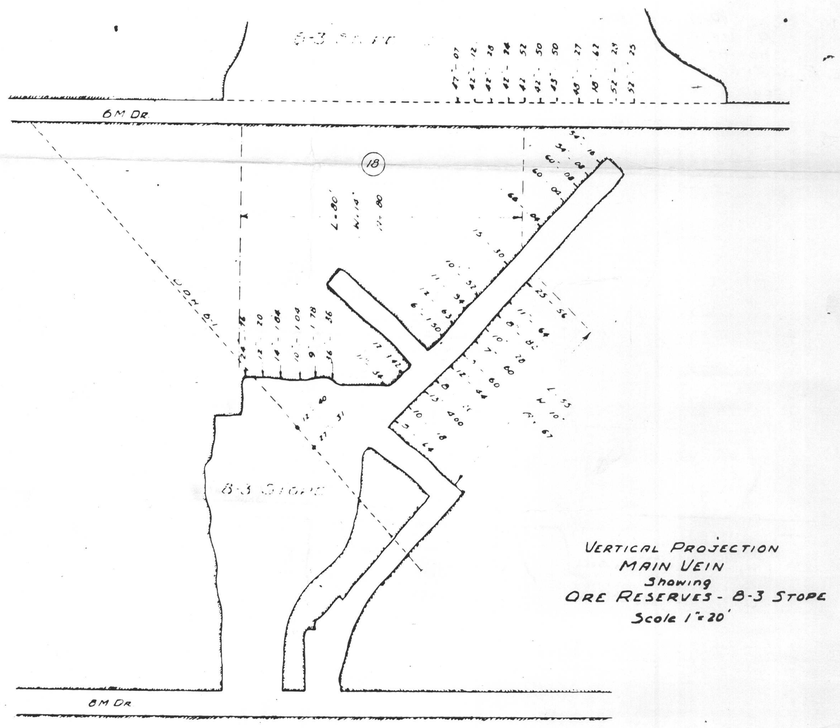

VERTICAL PROJECTION
MAIN VEIN
Showing
ORE RESERVES - B-3 STOPE
Scale 1"=20'

VEIN	BLOCK Nº	TONS	WIDTH	GRADE
"A"	1	600	28"	.42
	2	700	21"	.52
	3	600	12"	.75
	4	100	10"	1.35
	5	300	9"	1.13
	6	1,000	22"	.54
	7	400	38"	1.10
	8	300	12"	1.04
	9	900	24"	1.13
	10	900	21"	.47
	11	500	18"	.59
TOTAL		6,300	21"	.72

VEIN	BLOCK Nº	TONS	WIDTH	GRADE
SOUTH	12	500	14"	1.56
	13	1,300	22"	.93
	14	900	18"	.52
	15	600	16"	.48
TOTAL		3,300	19"	.81
MAIN	16	700	18"	.75
	17	400	18"	1.11
	18	300	14"	.80
TOTAL		1,400	17"	.87

SUMMARY OF ORE RESERVES

VEIN	TONS	WIDTH	GRADE - OZ AU/T
"A"	6,300	21"	0.72
"S"	3,300	19"	0.81
MAIN	1,400	17"	0.87
TOTAL	11,000	20"	0.76

Note
In calculating Ore Reserves:-
1. All high erratic assays cut.
2. No allowance made for dilution.
3. Tons, widths & assays weighted.
4. No estimate made of possible ore.

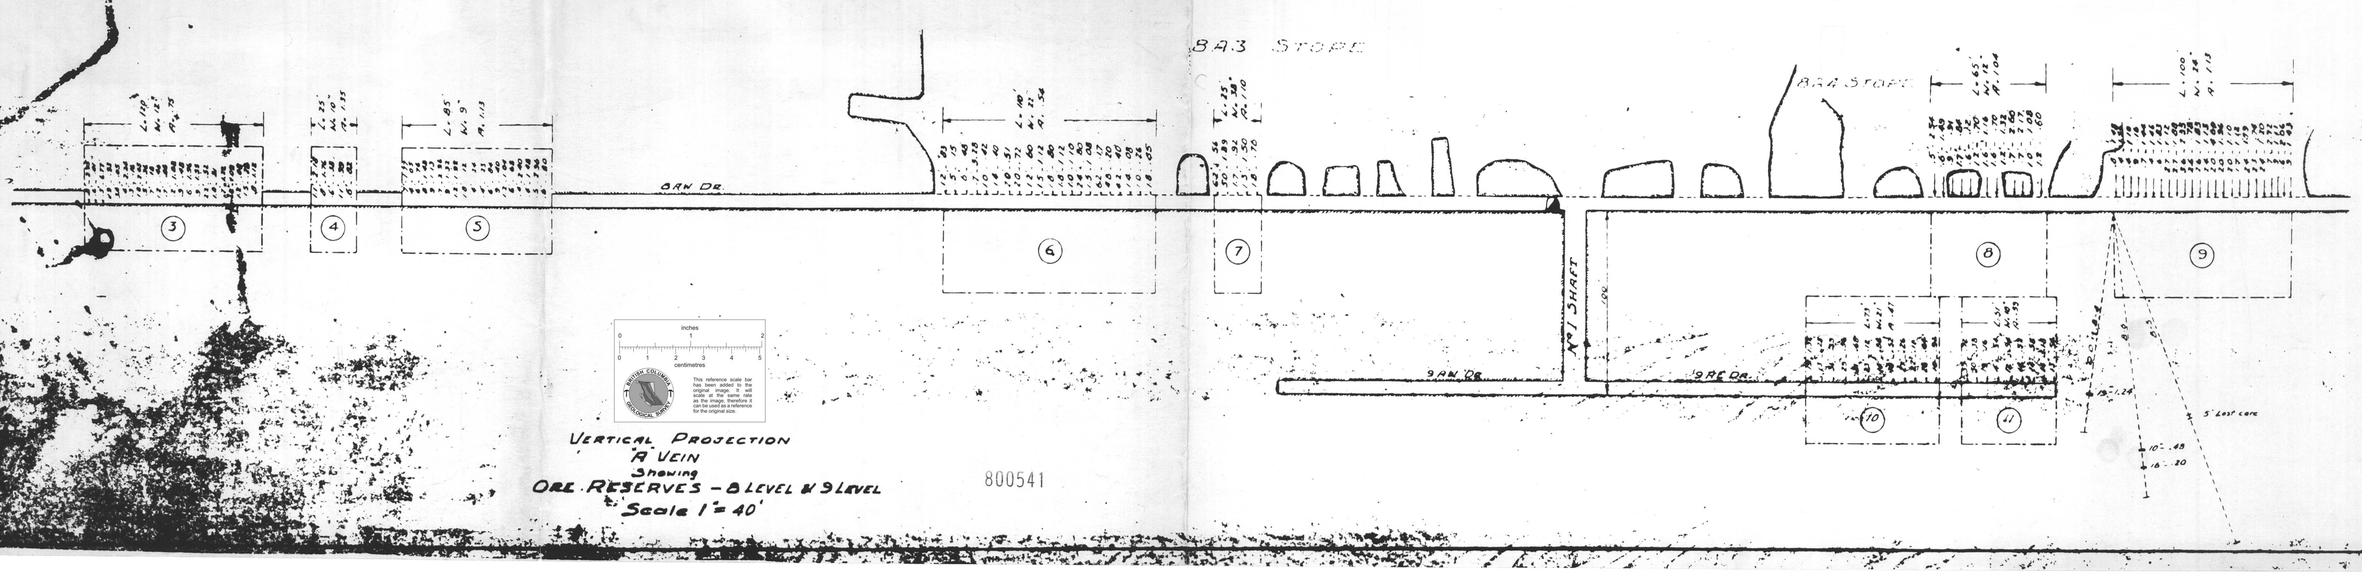

VERTICAL PROJECTION
"A" VEIN
Showing
ORE RESERVES - 8 LEVEL & 9 LEVEL
Scale 1"=40'

800541