Northern Hemisphere Development Corporation

NHD:TSX Venture Exchange

886207

NORTH TAR

Tom Schwetz Mar. 31/04 @ KB

NHDC Directors

Charlie O'Sullivan
Chairman

Frank Callaghan
President

Frank Bradley
Chief Financial Officer

Ken Maddison

Alan Crawford

NHDC Projects

Kaza – Northstar

new acquisition, B.C.

Sunrise Deposit

VMS, N.W.T.

Elk

past producer, N.W.T.

Kaza–Northstar Project

B.C.

Kaza – Northstar Location

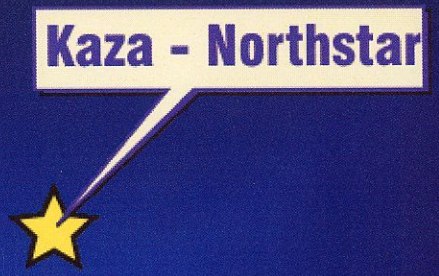

Regional Geology

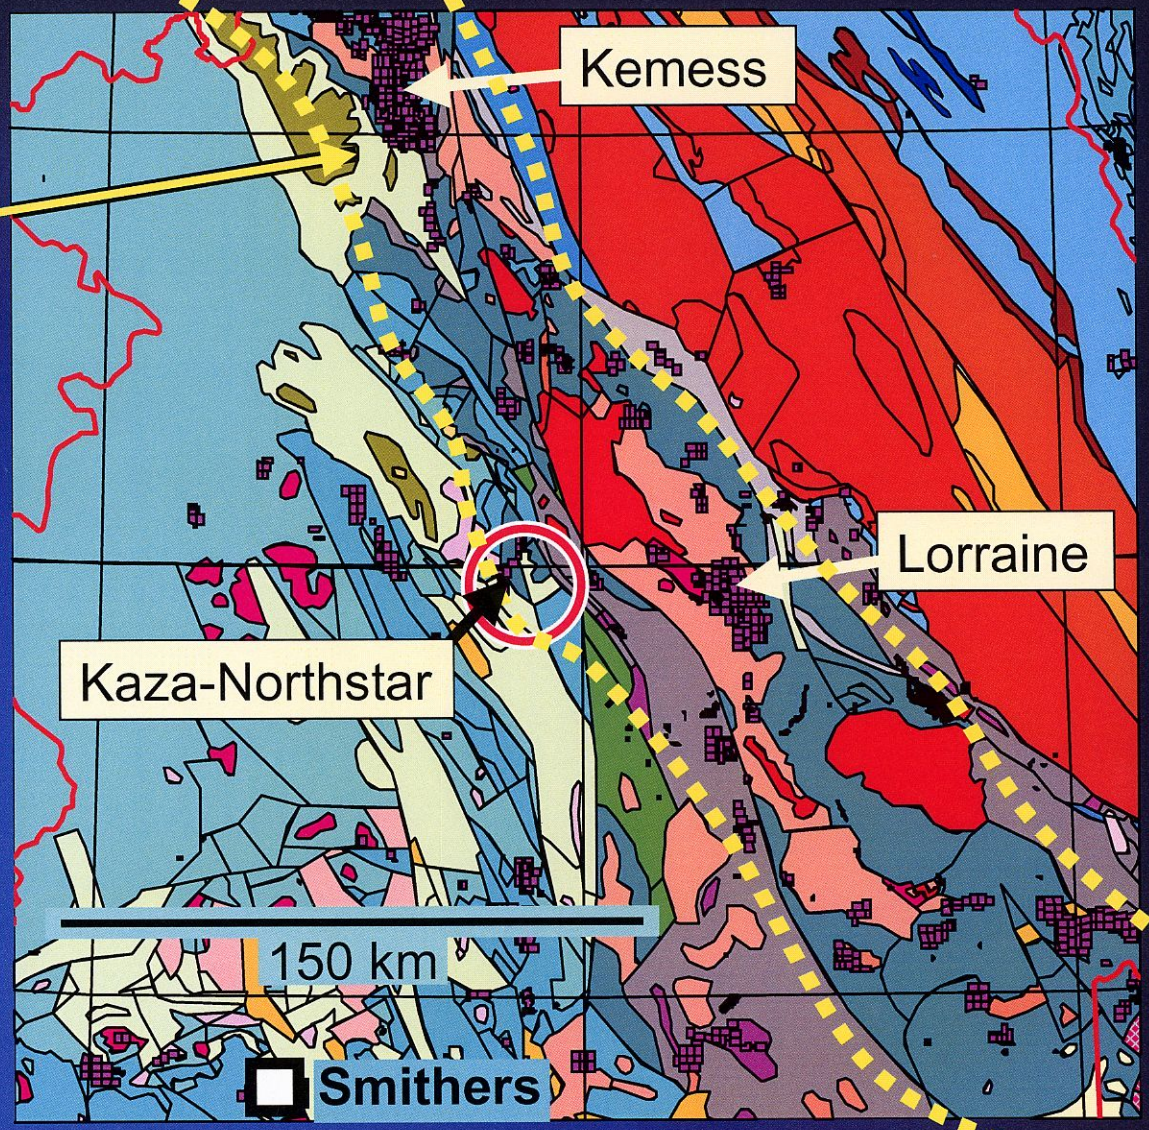

Favourable Geology

(Takla Volcanics)

Property Geology

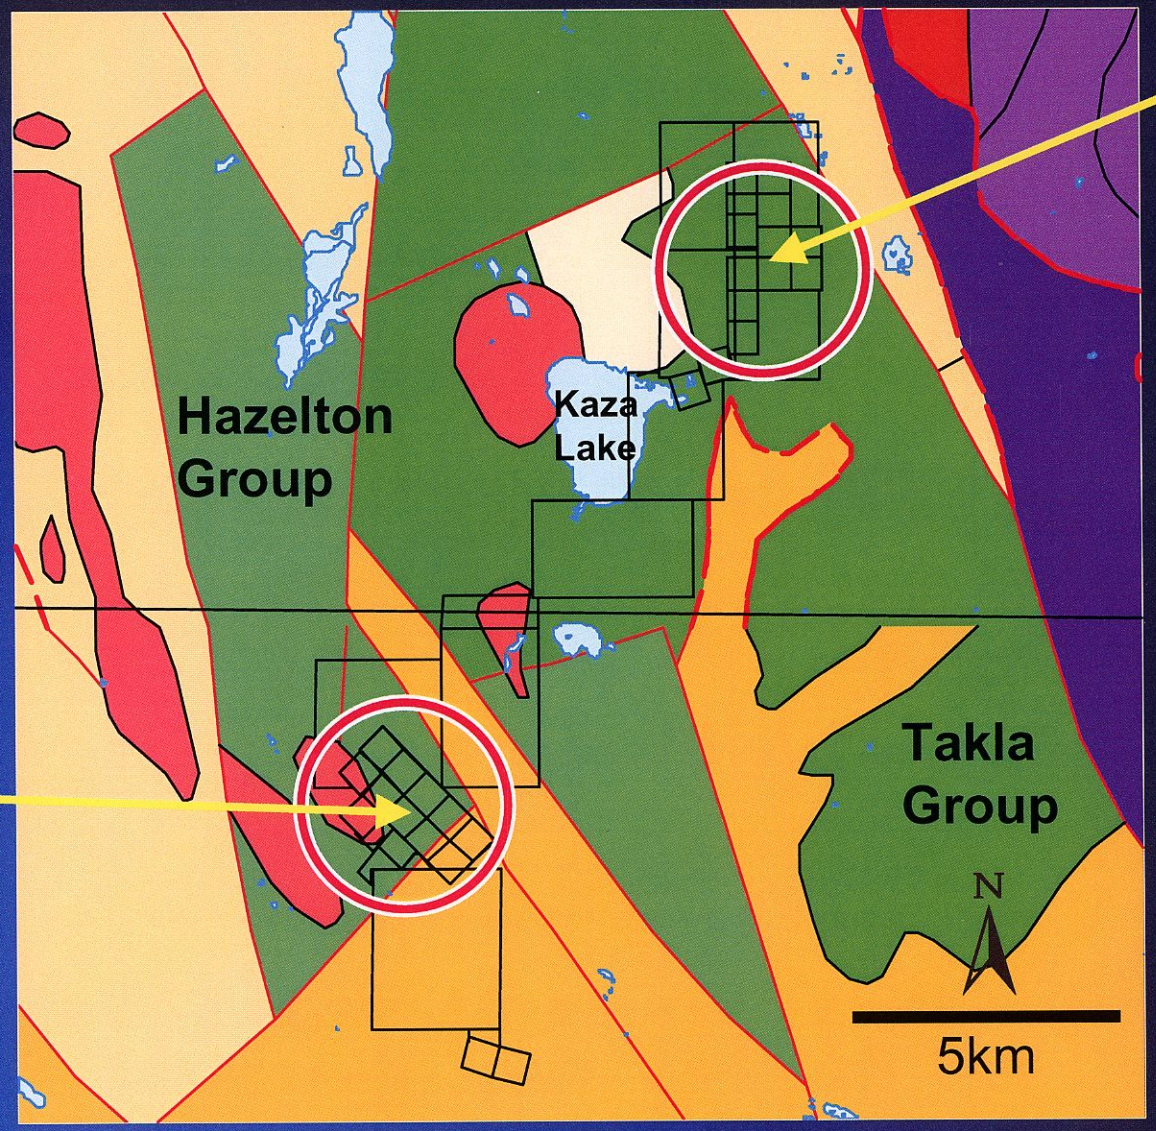

Northstar

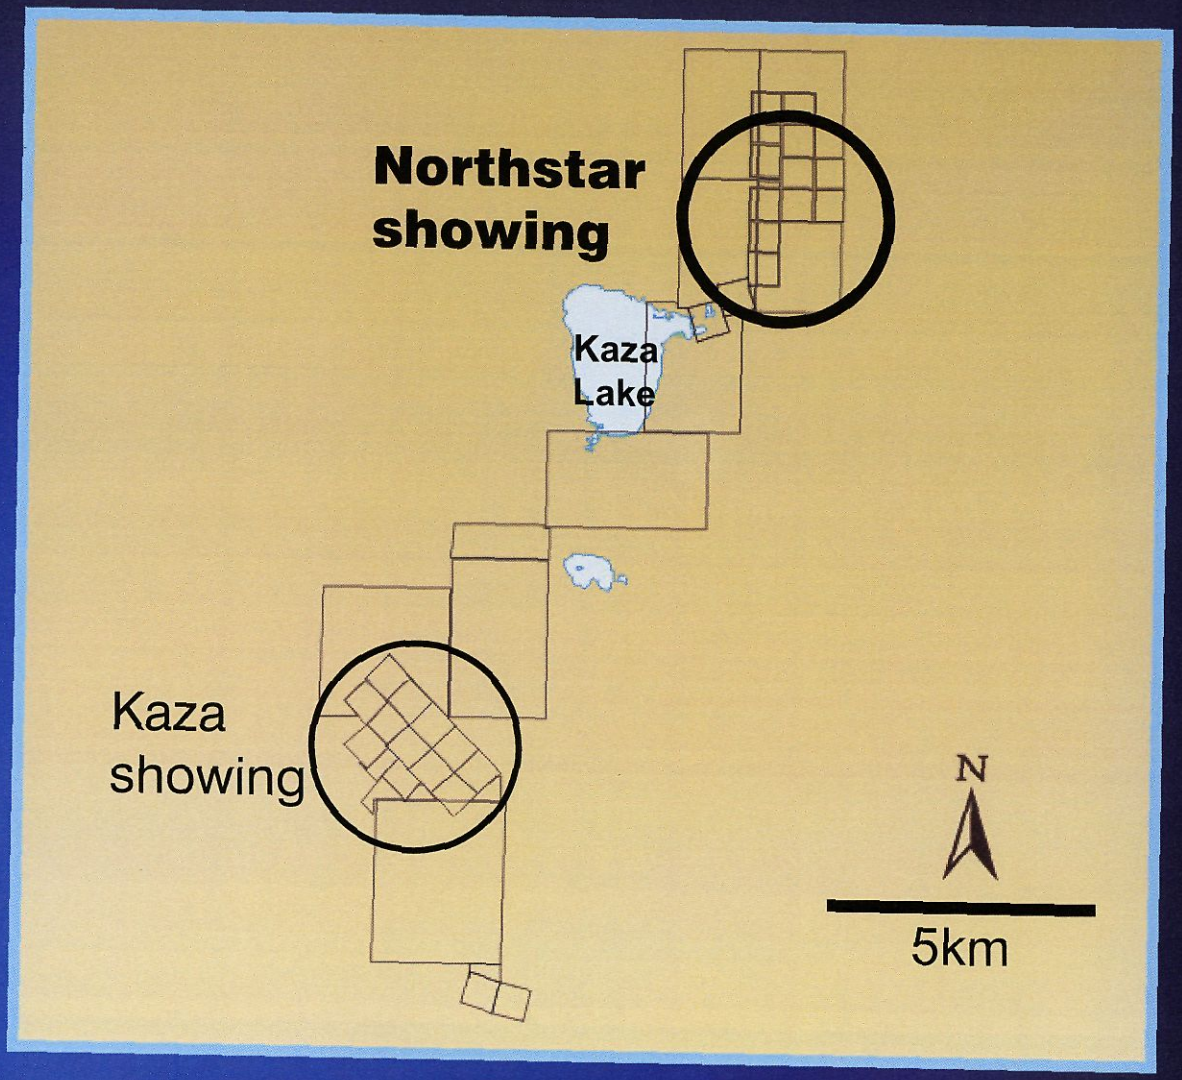

Northstar Copper Geochemistry

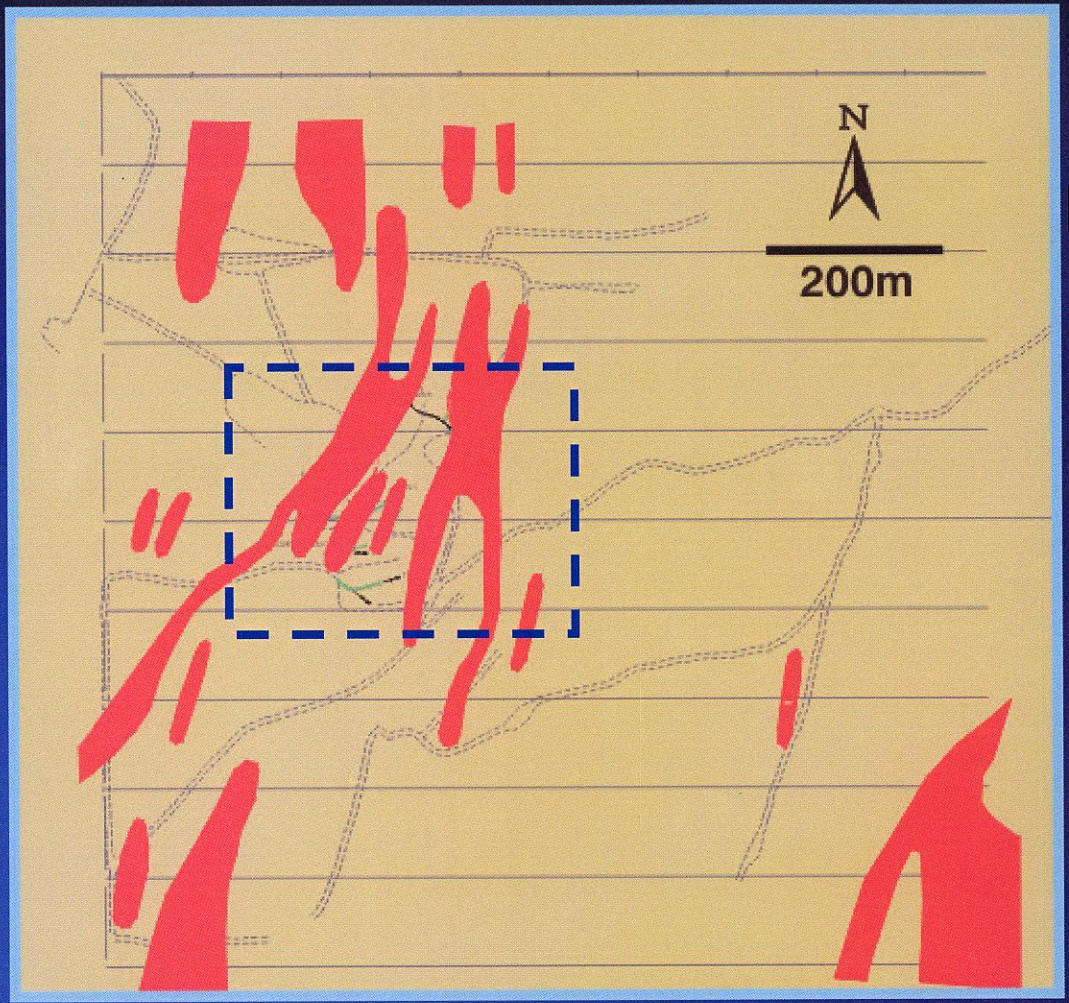

N

Cu > 200ppm

Northstar "B Showing" Trench Locations

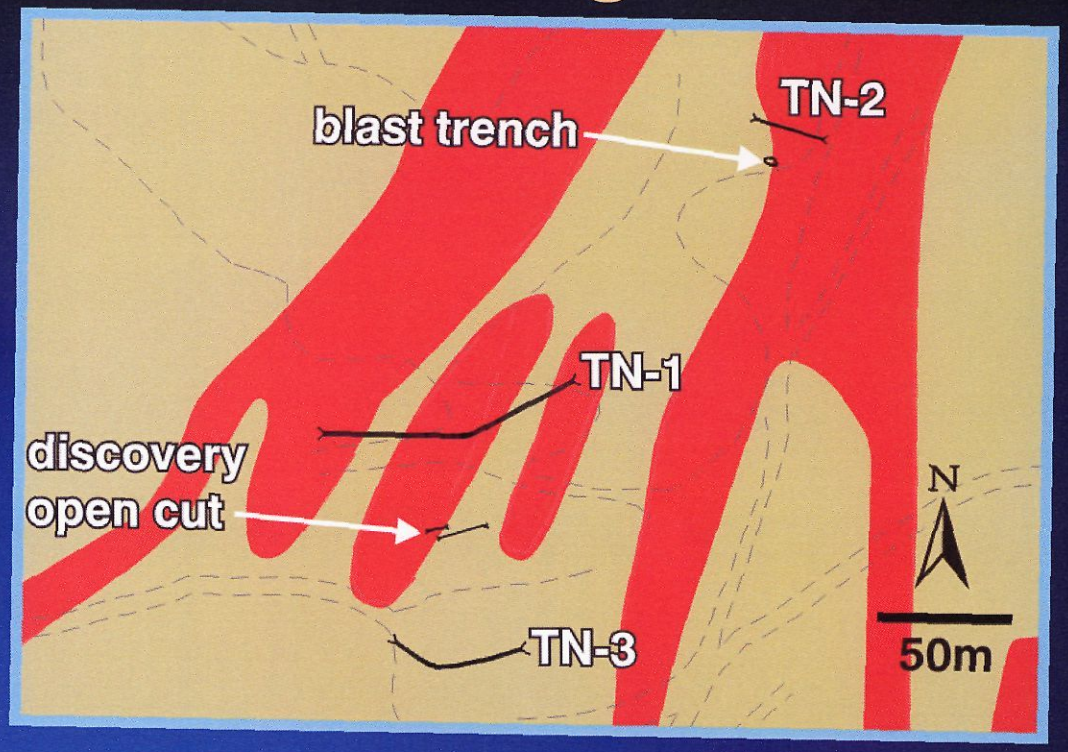

Trench	Width	Cu %	Silver (g/t)
Discovery	5.0m	7.9	55.2
Blast	5.5m	7.3	46.6
TN-1	23.0m	2.1	4.6
TN-2	7.0m	7.9	55.2

Work completed in 1997

Northstar "B Showing" Drill Locations

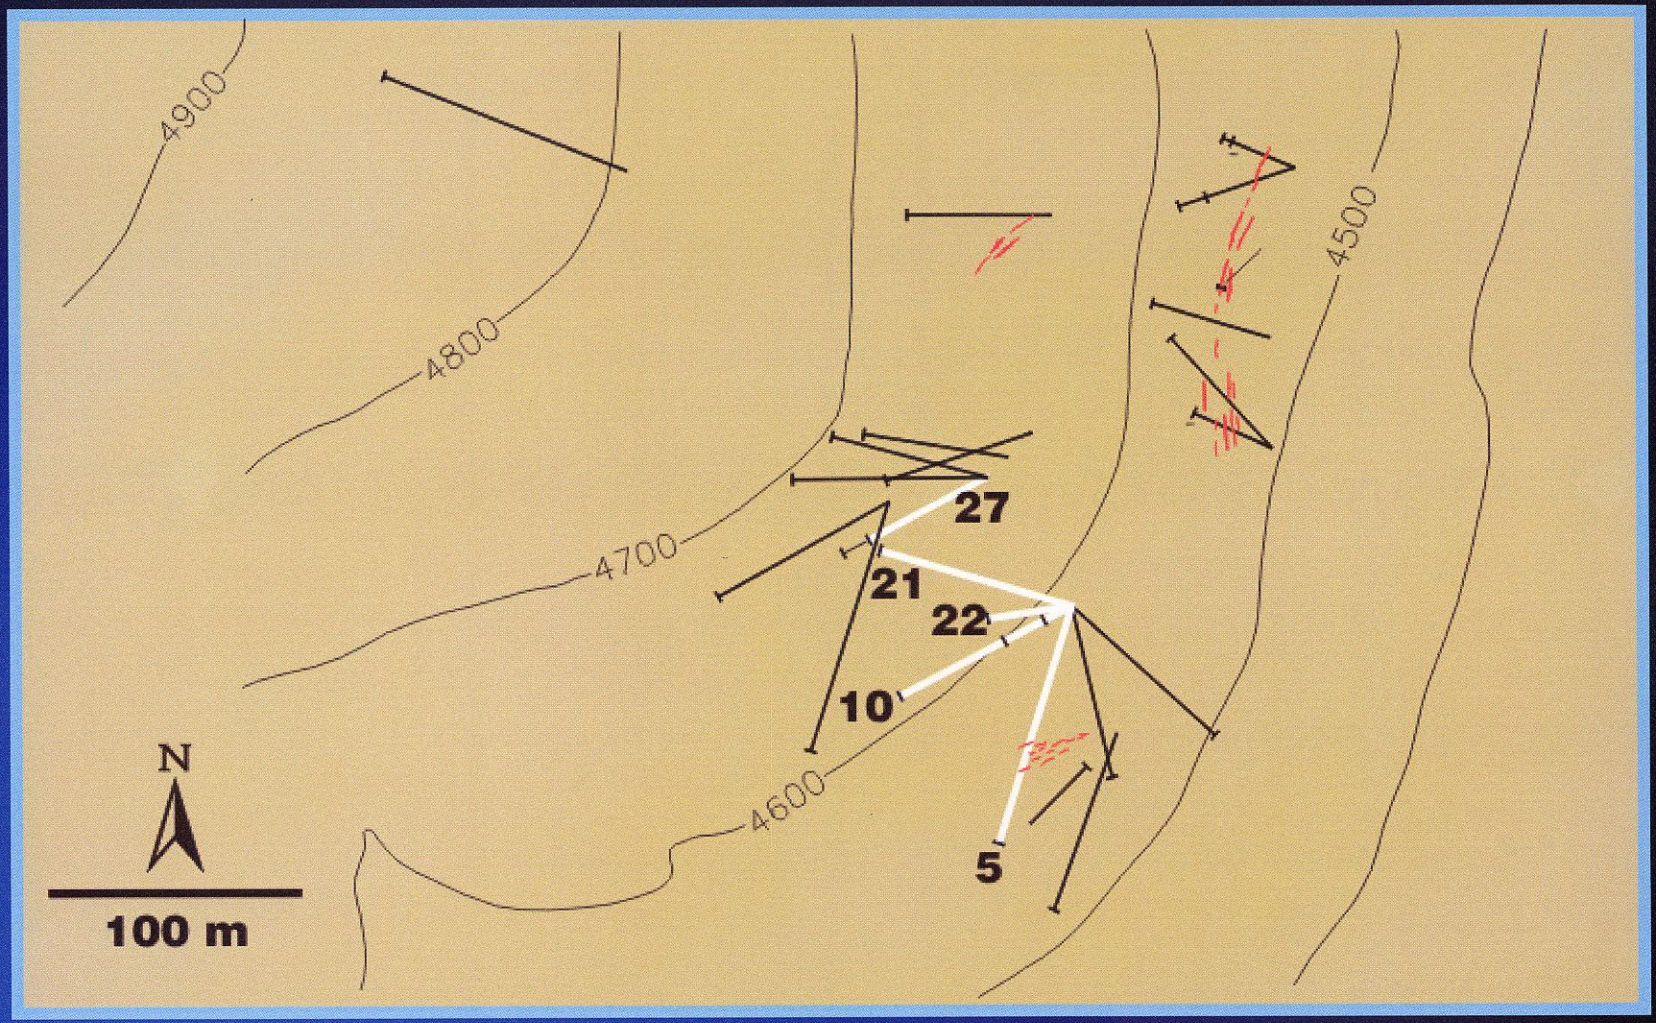

Northstar Significant Drill Results

Drill Hole	Width (m)	Cu %
5	15.0	1.38
7	20.0	0.64
10	16.0	1.68
12	2.0	1.52
13	2.5	0.40
19	0.3	0.85
20	3.0	0.28
21	13.0	1.14
22	5.0	1.97
23	12.0	1.50
25	2.0	4.29
26	3.0	4.32
27	8.0	2.79
31	9.0	1.51
31	5.0	0.83

Northstar Model

DDH	Width	Cu %
5	44’	1.38
10	48’	1.68
21	40’	1.14
22	16’	1.97
27	26’	2.79

Trench	Width	Cu %
1	26’	2.94
2	20’	13.25

Trenches and drilling completed in 1960’s

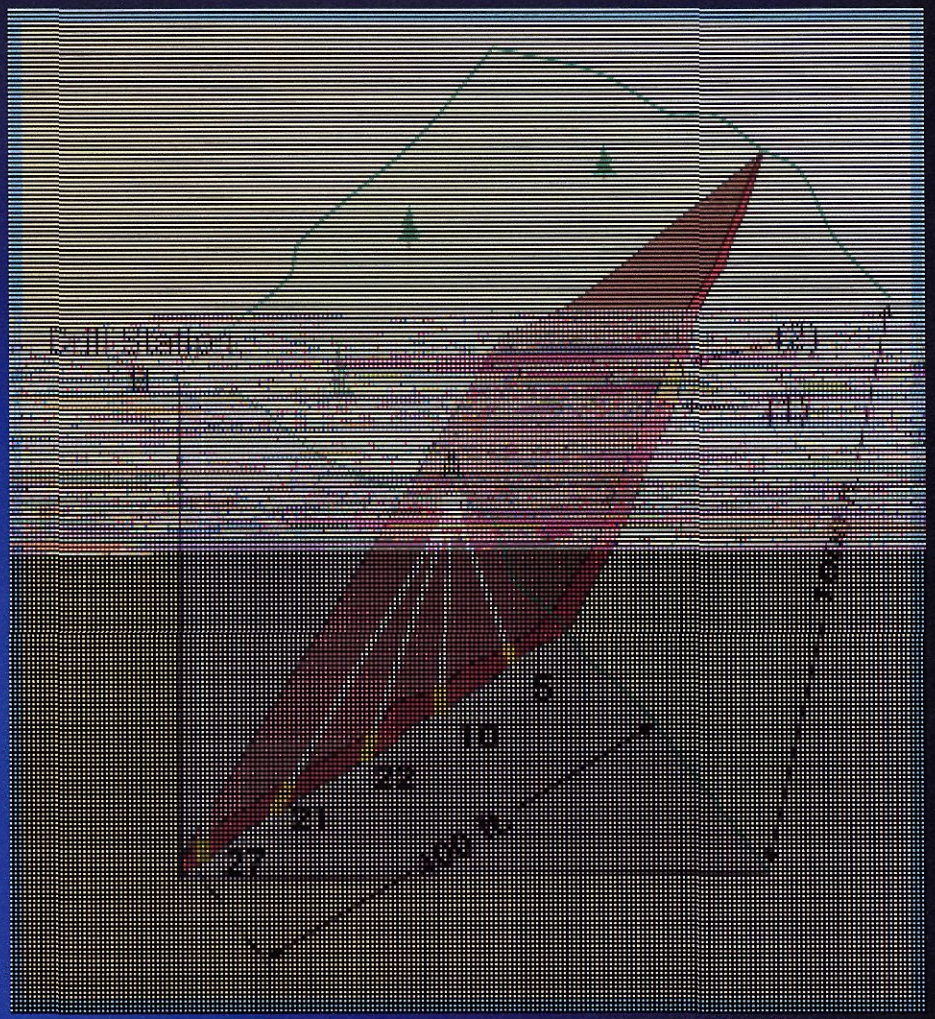

Northstar Program

Zone A

- Extend grid 1000m north
- Cut new lines at 100m intervals
- Soil samples at 50m intervals

Zone B

- Extend grid 1000m S, 250m E & 500m W
- Cut new lines at 100m intervals
- Collect soil samples at 50m intervals

Zone C

- Extend grid 1000m S, 250m E & 500m W
- Cut new lines at 100m intervals
- Collect soil samples at 50m intervals

Kaza

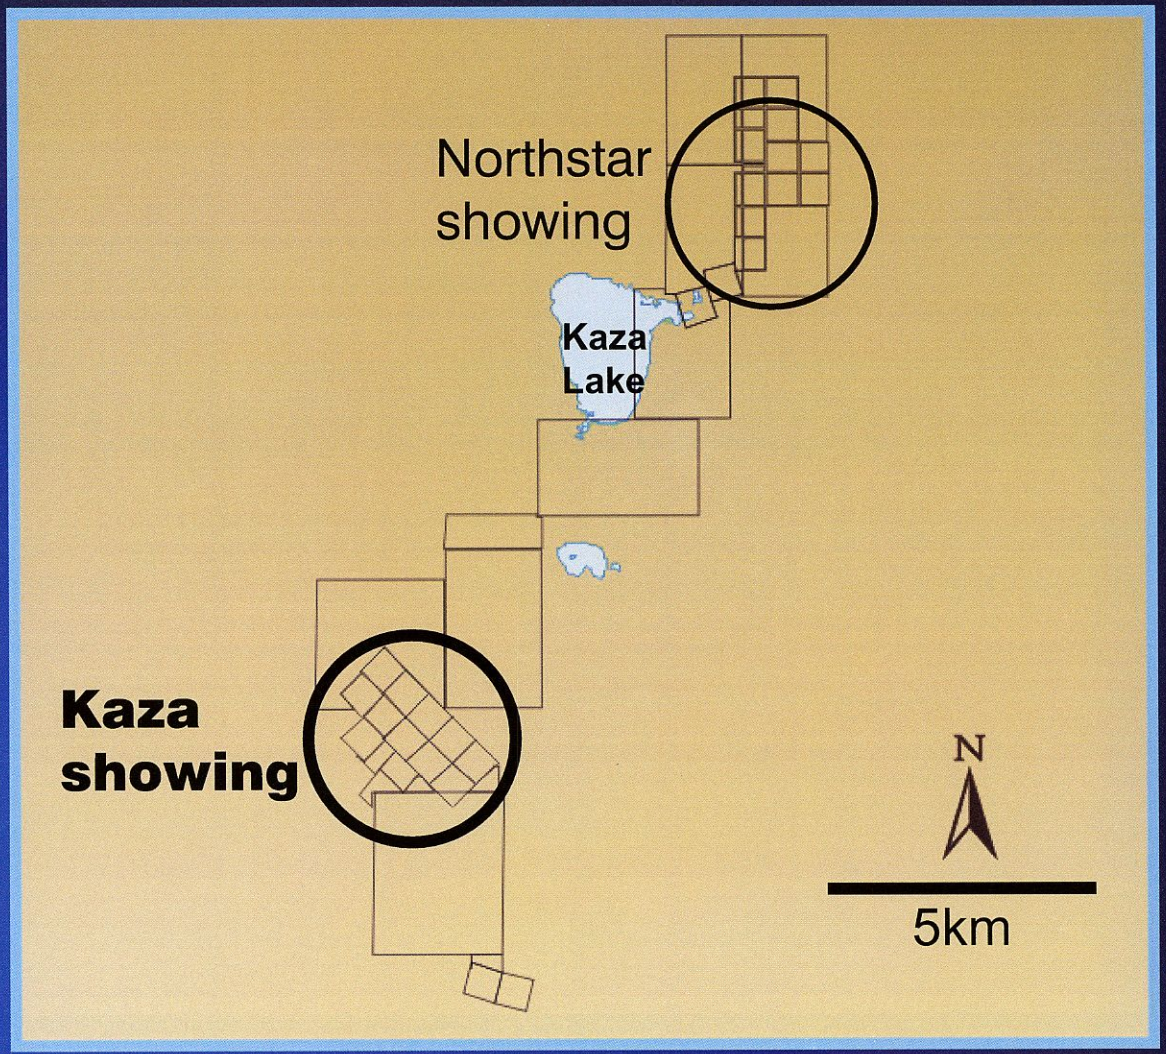

Kaza Showing

Zone	Width	Cu %	Au g/t	Ag g/t
MAIN	10m	0.99	1.57	29.1
SOUTH	10m	0.95	0.81	17.1
NORTH	10m	0.46	4.69	7.0
NORTH	10m	1.50	4.77	17.0
NORTH	10m	0.98	3.70	11.7
NORTH	5m	3.10	1.86	30.0

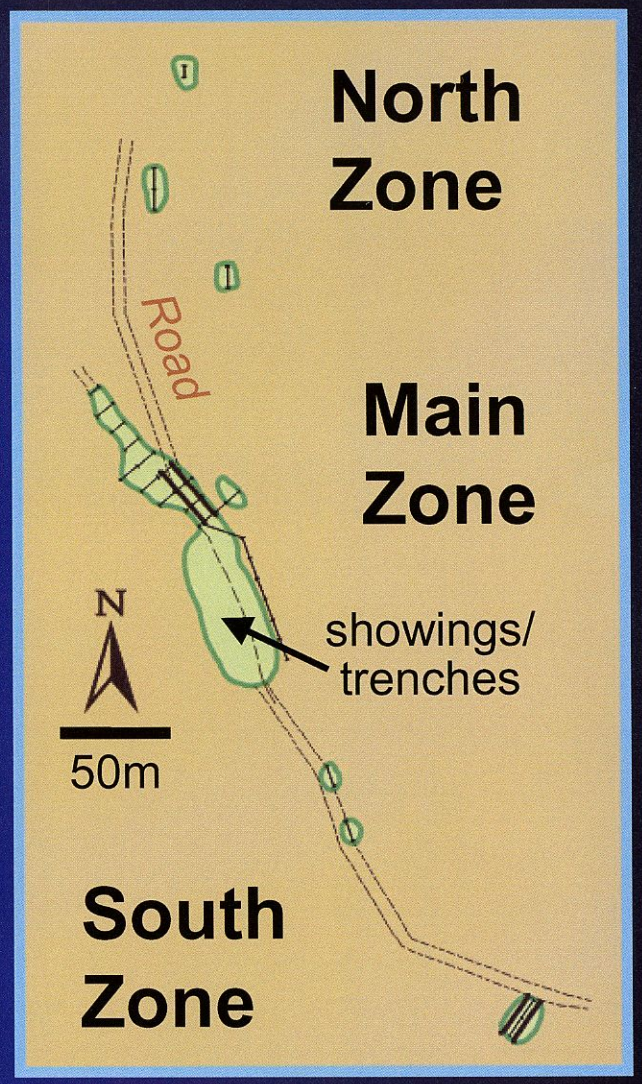

Kaza Copper Geochemistry

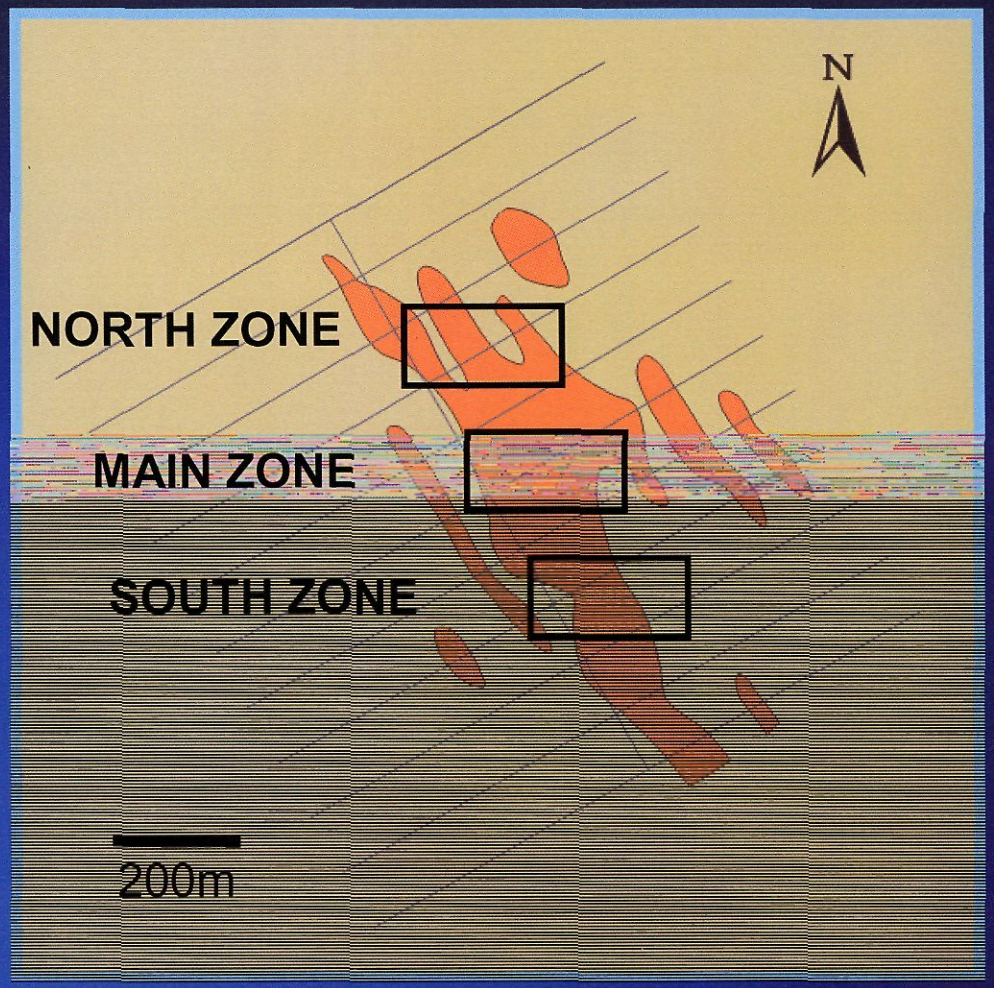

Cu > 200ppm

Kaza Gold Geochemistry

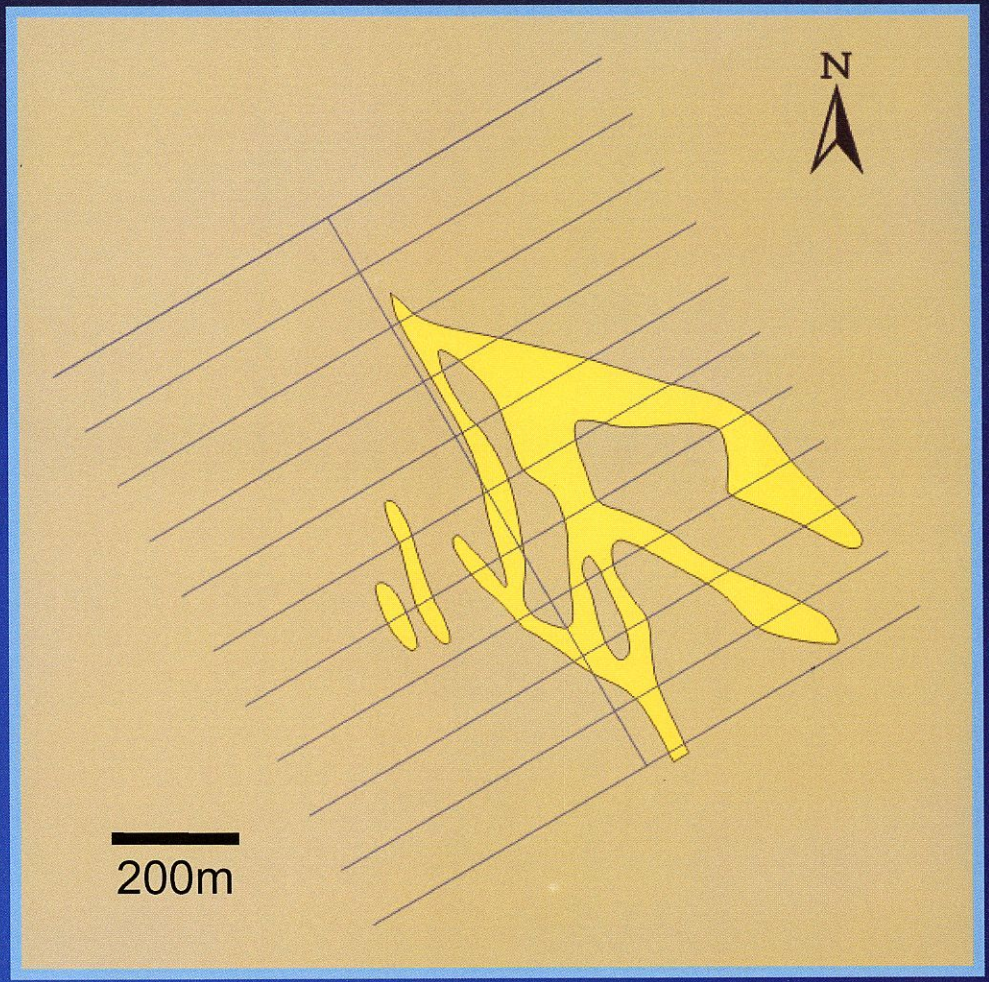

Au > 50ppb

Kaza Copper-Gold Geochemistry

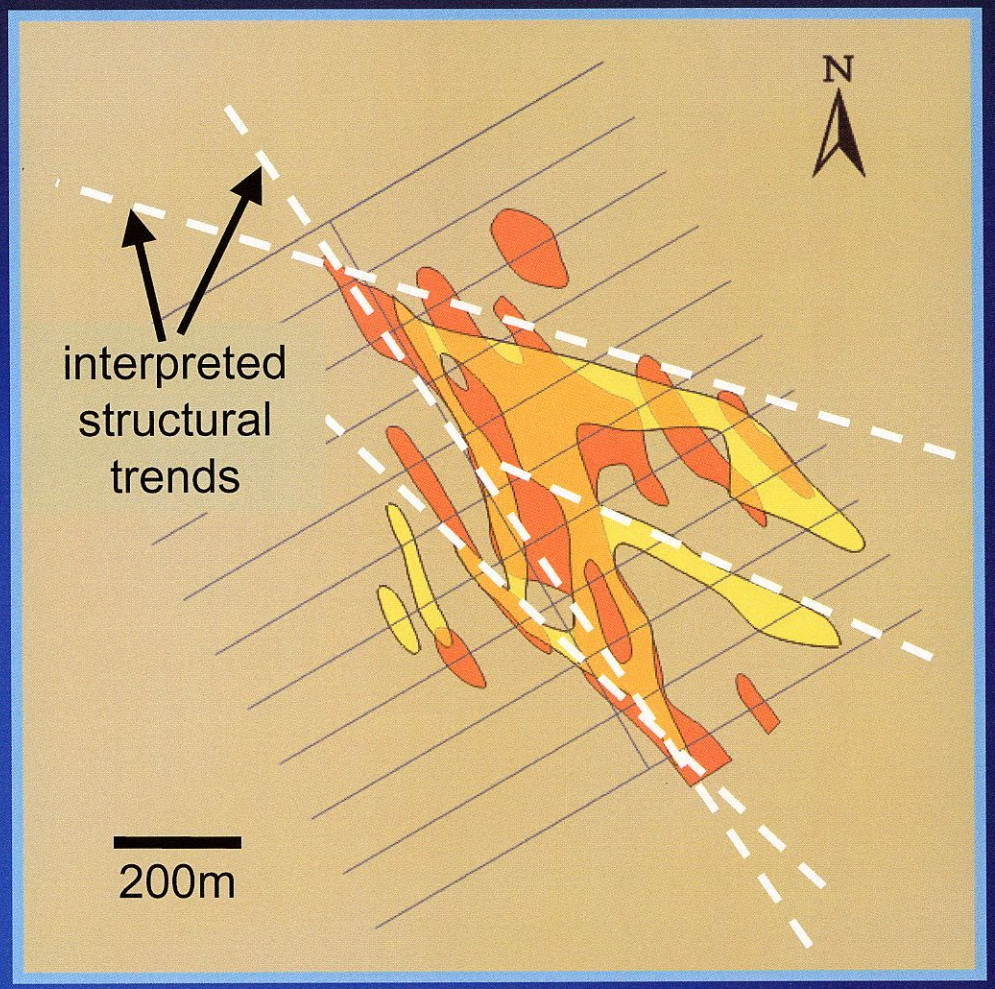

Au > 50ppb

Cu > 200ppm

Kaza Trench Locations

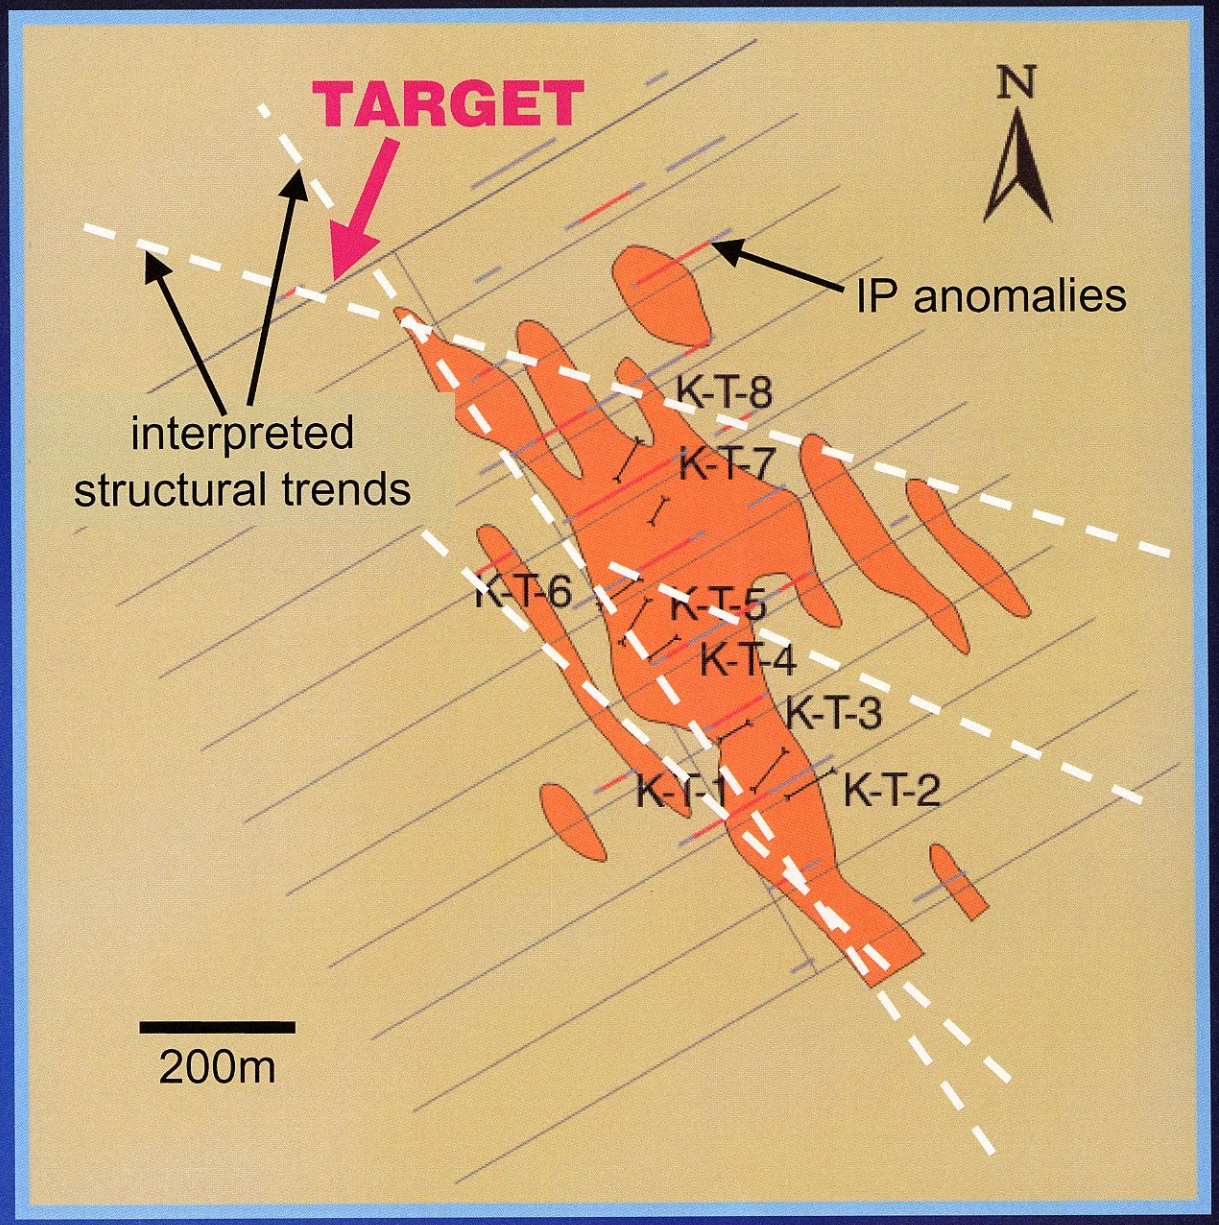

Kaza Trenching

Trench	Width	Au g/t	Cu ppm
K-T-1	3.0m	1.36	247
K-T-2	1.0m	2.47	1,316
K-T-3	1.0m	2.56	5,377
K-T-4	3.0m	2.04	219
K-T-5	1.5m	1.34	2,623
K-T-6	1.0m	1.42	731
K-T-7	7.5m	1.70	7,859
K-T-8	2.0m	1.57	17,300

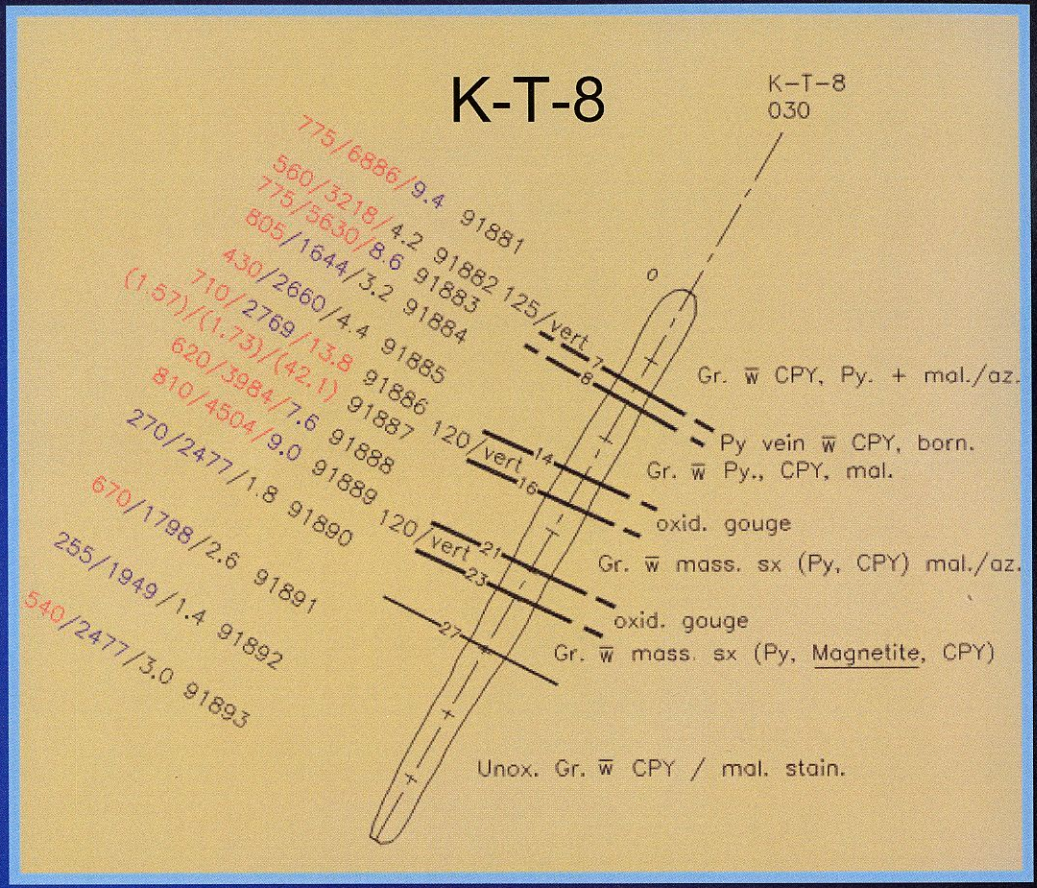

Kaza Program

- Extend grid for 1000m to the northwest
- Cut new lines at 100m intervals
- Collect soil samples at 50m intervals

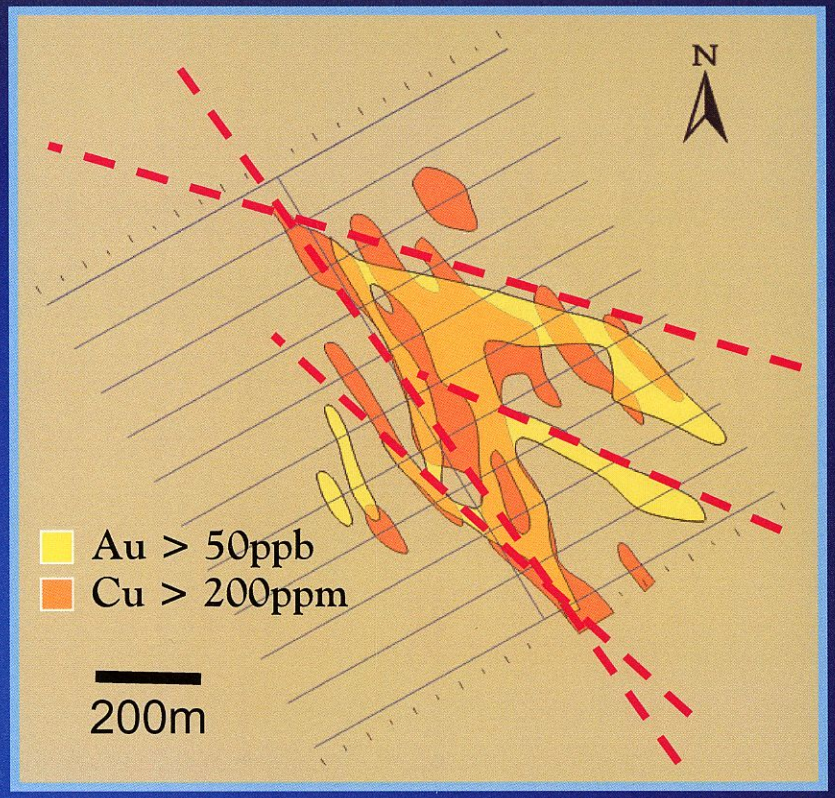

- Extend grid for 1000m to the southeast
- Cut new lines at 100m intervals
- Collect soil samples at 50m intervals

Kaza-Northstar Budget

Linecutting / sampling	$ 9,000
Sample analysis	$ 20,000
Rock sampling	$ 4,000
Ground geophysics	$ 55,000
Geologist	$ 36,000
Drilling (5500')	$110,000
Core assaying	$ 6,000
Logistical support	$ 5,000
Sub-Total	**$245,000**
Contingency (10%)	$ 25,000
TOTAL	**$270,000**

Northern Hemisphere Development Corporation

Investor Information

Trading Symbol	**NHD:TSX** Venture Exchange
Shares Outstanding	8.2 million
Fully Diluted	10.2 million
Head Office	305 – 455 Granville Street Vancouver, B.C., V6C 1E1 Tel: (800) 663 9688 Fax: (604) 669 3041 **www.north-hemisphere.com**